



a Standex company

ITEM: _____ PROJECT NAME: _____ DATE: _____

REFRIGERATED SELF-SERVE SLIM-LINE HIGH PROFILE SPECIALTY MERCHANDISER

- MODEL RSSL-378SC
 RSSL-478SC
 RSSL-578SC
 RSSL-678SC



Designed with impulse sales in mind. Get maximum return from an attention-grabbing merchandiser and increase profits. Available in lengths of 3', 4', 5, and 6', and 78" high.

Only 24" Deep

STANDARD FEATURES

- Adjustable black metal shelves with price tag molding. Four tiers of shelves can be flat or slanted.
- Top mounted fluorescent shielded light. Shelf lights optional.
- Choice of six standard laminates on exterior. Other color laminates are optional. Black metal front grill and galvanized steel back.
- Stainless steel display deck, black interior and glass end panels.
- Front Air Intake & Discharge.
- Energy saving night curtain.
- On-demand PTC condensate evaporator provided for a totally self-contained system.
- Insulated with high-density urethane foam.
- Electronic temperature control maintains 38° to 40° case temperature. Note: Case temperature will vary if the air curtain is disrupted.
- Cord & Plug.
- Thermometer.
- UL Safety and UL Sanitation Listed.
- DOE 2012 Compliant.


REFRIGERATED SELF-SERVE HIGH PROFILE SLIM-LINE SPECIALTY MERCHANDISER

OPTIONAL ACCESSORIES:

- Special Exterior Laminate Finish
- Stainless Steel Exterior Finish
- Glass Shelves
- Remote Refrigeration with Condensate Pump
- Condensate Pump

- LED Lighting
- Light Below Shelves
- Deli Meat Hooks or Pegs
- Casters (Self-Contained Models Only)

- Legs
- Reflective End Glass
- White or Stainless Interior (Including Shelving)
- Security Night Cover
- 120V Electrical for 478SC Model only (2 Circuits Required)

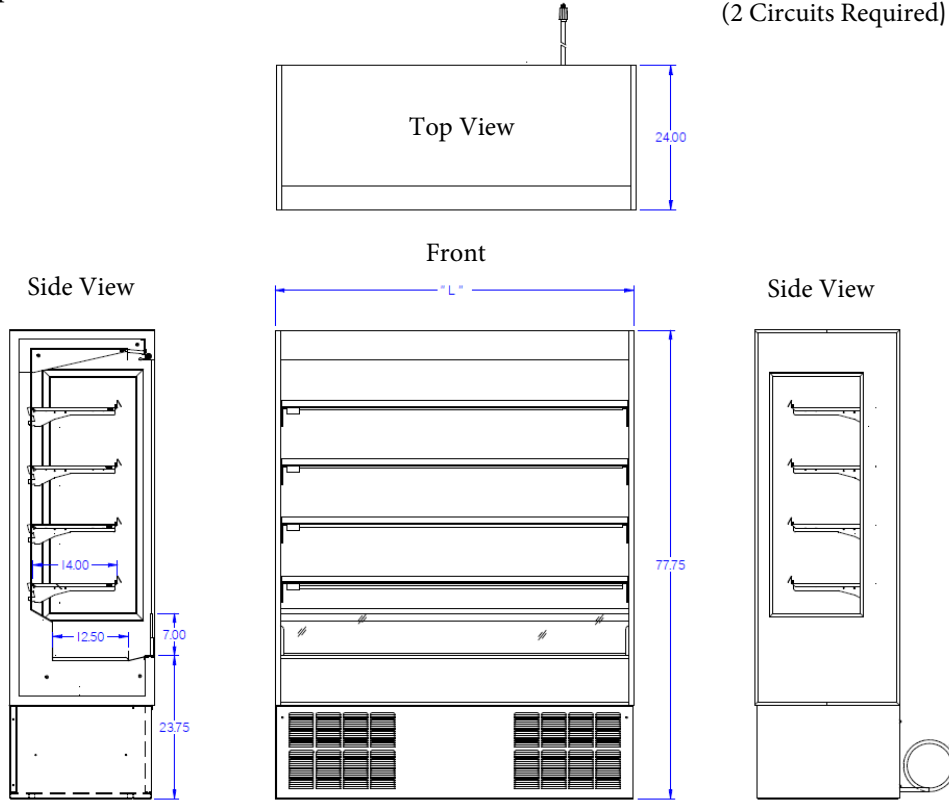

Model	Dimensions L W H	Shipping Weight (lbs)	Shelving	Self-Contained Electrical	NEMA Configuration For SC Models	Remote 120/60/1
<input type="checkbox"/> RSSL-378SC	36" x 24" x 78"	795	4 (14" x 34")	120/60/1 • 1/2 HP	NEMA 5-20P	3 AMPS
<input type="checkbox"/> RSSL-478SC	47.25" x 24" x 78"	885	4 (14" x 45")	208-240/60/1 • 3/4 HP	NEMA 6-20P	4 AMPS
<input type="checkbox"/> RSSL-578SC	59.25" x 24" x 78"	1,120	4 (14" x 57")	208-240/60/1 • 1 HP	NEMA 6-20P	5 AMPS
<input type="checkbox"/> RSSL-678SC	71.25" x 24" x 78"	1,180	8 (14" x 34")	208-240/60/1 • 1 HP	NEMA 6-20P	6 AMPS

- Case temperature will vary if the air curtain is disrupted.
- Electrical Requirement – The minimum circuit ampacity and maximum fuse size is 20 amps.
- Refrigerated cases are designed to operate in a maximum of 75°F ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.
- If GFCI is required, a GFI Breaker must be used in lieu of GFCI receptacle.



The Signature of Quality

FEDERAL INDUSTRIES
A Standex Company

215 FEDERAL AVENUE, BELLEVILLE, WISCONSIN 53508-9201

PHONE: 800-356-4206

EMAIL: geninfo@federalind.com

FAX: 608-424-3234

WEBSITE: www.federalind.com

