

Water Specification

Water Connection Inlet
1/4" Male Flare Fitting

Minimum Flow Rate
1 1/2 gpm [5.7 lpm]

Water Pressure
20-75 psig [138-517 kPa]

Electrical Configuration

Plastic Brew Basket Configuration Code	Stainless Steel Brew Basket Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] / Hour
E213251	E213251M	2 x 2.3 kW	200-240	1	2+G	3.3-4.7	Hardwired	16.5-19.7	11.5 [43.5] ⁽¹⁾
E213252	E213252M	2 x 3.0 kW	200-240	1	2+G	4.2-6.1	Hardwired	21.3-25.5	14.0 [53] ⁽¹⁾


(1) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 200°F water. 3 liters per batch.

Measurements


Height	Width	Depth	Empty Weight	Filled Weight	Combined Filled Weight	Hot Water Tank Cap.	Shipping Weight:	Shipping Dimensions:
25 3/4" [66 cm]	19 3/4" [50 cm]	20 3/8" [52 cm]	47 lbs [21 kg]	92 lbs [41 kg]	114.4 lbs [51 kg] BREWERS + 2 FILLED D041 DISPENSERS	5.8 gal [22.1 l]	58 lbs [26 kg]	23" x 25" x 29" [59 x 64 x 74 cm]

Dimensional Views


SIDE VIEW

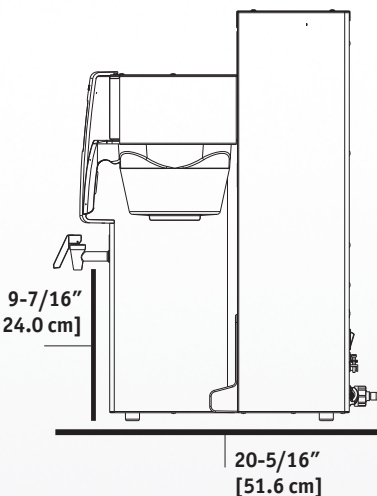

FRONT VIEW

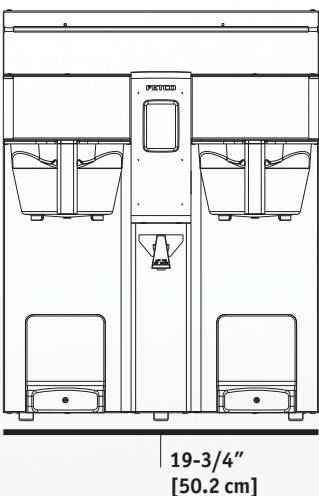


BACK VIEW

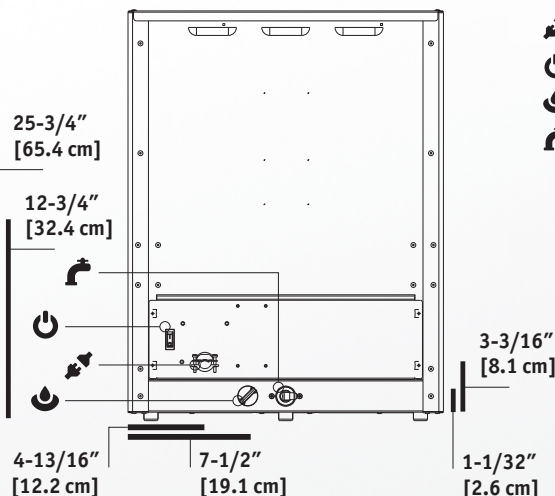

SYMBOLS

- Electrical Connector
- On / Off Switch
- Tank Drain
- Water Inlet



Cups per Hour*

8oz.	224
12oz.	149
16oz.	112
20oz.	90

Compatible Dispensers

#D041
3.0L Thermal Pump
Lever Airpot

Product DIMS:
Height: 14 1/2" [36.8 cm]
Width: 7" [17.8 cm]
Depth: 9" [22.9 cm]
Weight:
Empty: 4.6 lbs [2.1 kg]
Filled: 11.1 lbs [5.1 kg]



Paper Coffee Filters

#F002
13" x 5"
Paper Coffee Filter



Brew Baskets

#B012218B1
13" x 5"
Stainless Steel



#B014218BN2
13" x 5"
Plastic w/ Brown Insert



MANUFACTURED
IN THE USA

* Approximate based on maximum power setting.