



1.5 GALLON COFFEE BREWING SYSTEM

CBS 2150 TOUCHSCREEN SERIES

The 1.5 Gallon CBS-2151 / 2152 XTS Touchscreen Series Coffee Brewers provide flexibility in medium-to-large sized venues such as Banquet Halls, Cafeterias and Restaurants. Simplify your daily operations and experience total control of this fully featured Extractor® Brewing System via an inviting touchscreen interface display that is intuitive, easy to read and simple to navigate.



CBS-2151XTS
Single Station Brewer*




CBS-2152XTS
Dual Station Brewer*

* Shown with L3D-15 Luxus® Dispenser (sold separately)

Perfect taste begins with a simple touch...

User Friendly Touchscreen

Access all controls via an inviting touchscreen interface display that blends intuitive icons with dynamic time and volume data to provide instant visual feedback at any point during programming, diagnostics or the brew cycle.

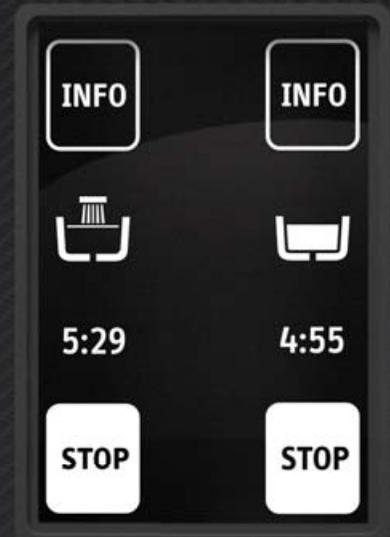

Streamlined Programming, Diagnostics and Metrics

The Extractor® Touchscreen Operating System (ETOS) was engineered for quick and efficient navigation through set-up, programming, diagnostics and daily operational brewing modes.



Customizable Screens

Customize the start screen to tie your equipment and product offerings into a consistent brand message. You can also create and display individual recipe names for quick and easy access to your most used coffee blends.




XTS™ Series

Driven by a user friendly touchscreen interface and intuitive software, the XTS series represents the next step in the evolution of FETCO's renown EXTRACTOR® brewing technology.



Cascading Spray Dome™

Hot tank water flows over clog-free channels built into the dome and virtually eliminates spray head scale buildup – a leading reason for service calls.

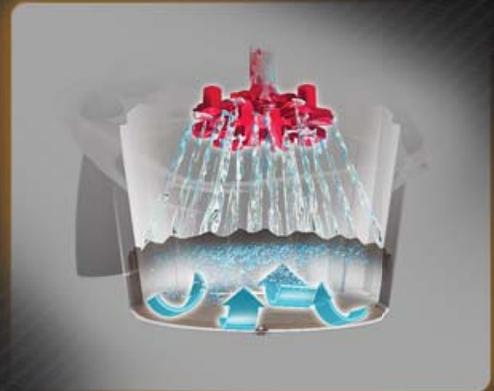

Legendary Extractor® Control

Take your coffee to its peak level by unlocking the full freshness, aroma and flavor of your taste profile with the legendary EXTRACTOR® brewing technology.



Contemporary Design

Sleek European cabinet design is attractive and fits well in most front-of-house decor typically found in coffee shops, lounges and cafes.



Modern Convenience

Duplicate profiles and parameters to and from any of the batch buttons on a single machine or copy the information to an unlimited number of brewers via a removable SD card (Sold separately).



Luxus® Dispensing

The portable LUXUS® L3D Series Thermal Servers and Dispensers feature high-quality stainless-steel vacuum liners for optimum retention of heat, freshness and flavor.



LUXUS®
Thermal Dispenser

Water Specification

Water Connection Inlet 1/4" Male Flare Fitting	Minimum Flow Rate 1 1/2 gpm [5.7 lpm]	Water Pressure 20-75 psig [138-517 kPa]
---	--	--

Electrical Configuration

Plastic Brew Basket Configuration Code	Stainless Steel Brew Basket Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] / Hour
E215151	E215151M	2 x 3.0 kW	200-240	1	2+G	4.7-6.1	Hardwired	22.1-25.5	11.5 [43.5] ⁽¹⁾

(1) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 200°F water. 1 1/2 gallon per batch.

Measurements

Height 36 3/4" [93 cm]	Width 12 3/4" [32 cm]	Depth 20 3/8" [51 cm]	Empty Weight 53 lbs [24 kg]	Filled Weight 106 lbs [48 kg]	Combined Filled Weight 129 lbs [59 kg] <small>BREWER + 1 FILLED L3D-15 DISPENSER</small>	Hot Water Tank Cap. 6.4 gal [24 l]	Shipping Weight: 57 lbs [26 kg]	Shipping Dimensions: 17" x 20" x 35" [43 x 50 x 88 cm]
------------------------------	-----------------------------	-----------------------------	-----------------------------------	-------------------------------------	--	--	---------------------------------------	--

Cups per Hour*

8oz. **248**

12oz. **165**

16oz. **124**

20oz. **99**

* Approximate based on maximum power setting.

Compatible Dispensers

L3D-15
1.5 Gallon LUXUS®
Thermal Dispenser

Product DIMS:
Height: 22 7/8"
Width: 9"
Depth: 22 3/4"
Weight:
Empty: 10.5 lbs
Filled: 22.4 lbs



TPD-15
1.5 Gallon LUXUS®
Portable Thermal
Dispenser

Product DIMS:
Height: 22 7/8"
Width: 9 5/16"
Depth: 13 7/8"
Weight:
Empty: 12.8 lbs
Filled: 24.7 lbs



L3S-15
1.5 Gallon LUXUS®
Thermal Server*

Product DIMS:
Height: 14 1/2"
Width: 9"
Depth: 11 1/4"
Weight:
Empty: 7.2 lbs
Filled: 17.6 lbs



* Must be used with S3S Serving Stations.

Paper Coffee Filters

#F001
15" x 5.5"
Paper Coffee Filter



Brew Baskets

#B015280BN2
16" x 6"
Plastic w/ Brown Insert



#B001280B1
16" x 6"
Stainless Steel



Serving Stations

S3S-1 Single
Serving Station




S3S-2 Twin
Serving Station



S3S-3 Triple
Serving Station



 Dimensional Views

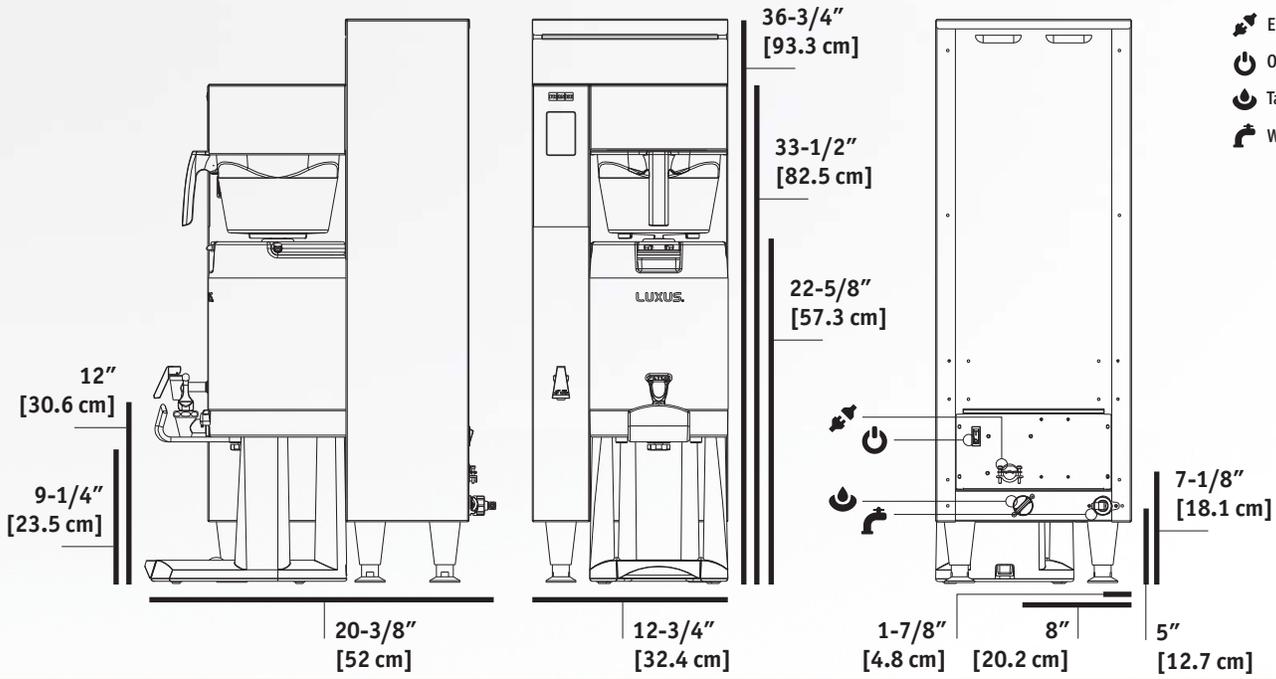

SYMBOLS

-  Electrical Connector
-  On / Off Switch
-  Tank Drain
-  Water Inlet

 Gallery



MANUFACTURED
★ IN THE USA ★

Water Specification

Water Connection Inlet
1/4" Male Flare Fitting

Minimum Flow Rate
1 1/2 gpm [5.7 lpm]

Water Pressure
20-75 psig [138-517 kPa]

Electrical Configuration

Plastic Brew Basket Configuration Code	Stainless Steel Brew Basket Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] / Hour
E215251	E215251M	2 x 3.0 kW	208-240	1 ⁽²⁾	2+G	4.6-6.1	Hardwired	22.4-25.8	11.5-15.5 [43.7-58.9] ⁽¹⁾
		3 x 3.0 kW	208-240	3	3+G	6.9-9.1	Hardwired	19.5-22.5	17.4-23.0 [65.9-87.0] ⁽¹⁾
E215252	E215252M	2 x 5.0 kW	208-240	1 ⁽²⁾	2+G	7.6-10.1	Hardwired	36.9-42.5	19.3-25.7 [73.1-97.3] ⁽¹⁾
		3 x 5.0 kW	208-240	3	3+G	11.4-15.1	Hardwired	32.0-36.9	29.0-38.4 [109.4-145.3] ⁽¹⁾

(1) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 200°F water. 1 1/2 gallon per batch.

(2) 1 or 3 phase configuration is field selectable by user. Sold factory configured for single phase 2 wire plus ground.

Measurements

Height 36 3/4" [93 cm]	Width 21 3/4" [55 cm]	Depth 20 3/8" [51 cm]	Empty Weight 77 lbs [35 kg]	Filled Weight 174 lbs [78 kg]	Combined Filled Weight 220 lbs [99 kg] <small>BREWER + 2 FILLED L3D-15 DISPENSERS</small>	Hot Water Tank Cap. 11.5 gal [43 l]	Shipping Weight: 90 lbs [41 kg]	Shipping Dimensions: 22" x 27" x 35" [55 x 68 x 88 cm]
------------------------------	-----------------------------	-----------------------------	-----------------------------------	-------------------------------------	---	---	---------------------------------------	--

Cups per Hour*

8oz. **614**

12oz. **410**

16oz. **307**

20oz. **246**

* Approximate based on maximum power setting.

Compatible Dispensers

L3D-15
1.5 Gallon LUXUS®
Thermal Dispenser

Product DIMS:
Height: 22 7/8"
Width: 9"
Depth: 22 3/4"
Weight:
Empty: 10.5 lbs
Filled: 22.4 lbs



TPD-15
1.5 Gallon LUXUS®
Portable Thermal
Dispenser

Product DIMS:
Height: 22 7/8"
Width: 9 5/16"
Depth: 13 7/8"
Weight:
Empty: 12.8 lbs
Filled: 24.7 lbs



L3S-15
1.5 Gallon LUXUS®
Thermal Server*

Product DIMS:
Height: 14 1/2"
Width: 9"
Depth: 11 1/4"
Weight:
Empty: 7.2 lbs
Filled: 17.6 lbs



* Must be used with S3S Serving Stations.

Paper Coffee Filters

#F001
15" x 5.5"
Paper Coffee Filter



Brew Baskets

#B015280BN2
16" x 6"
Plastic w/ Brown Insert



#B001280B1
16" x 6"
Stainless Steel



Serving Stations

S3S-1 Single
Serving Station




S3S-2 Twin
Serving Station



S3S-3 Triple
Serving Station



Dimensional Views

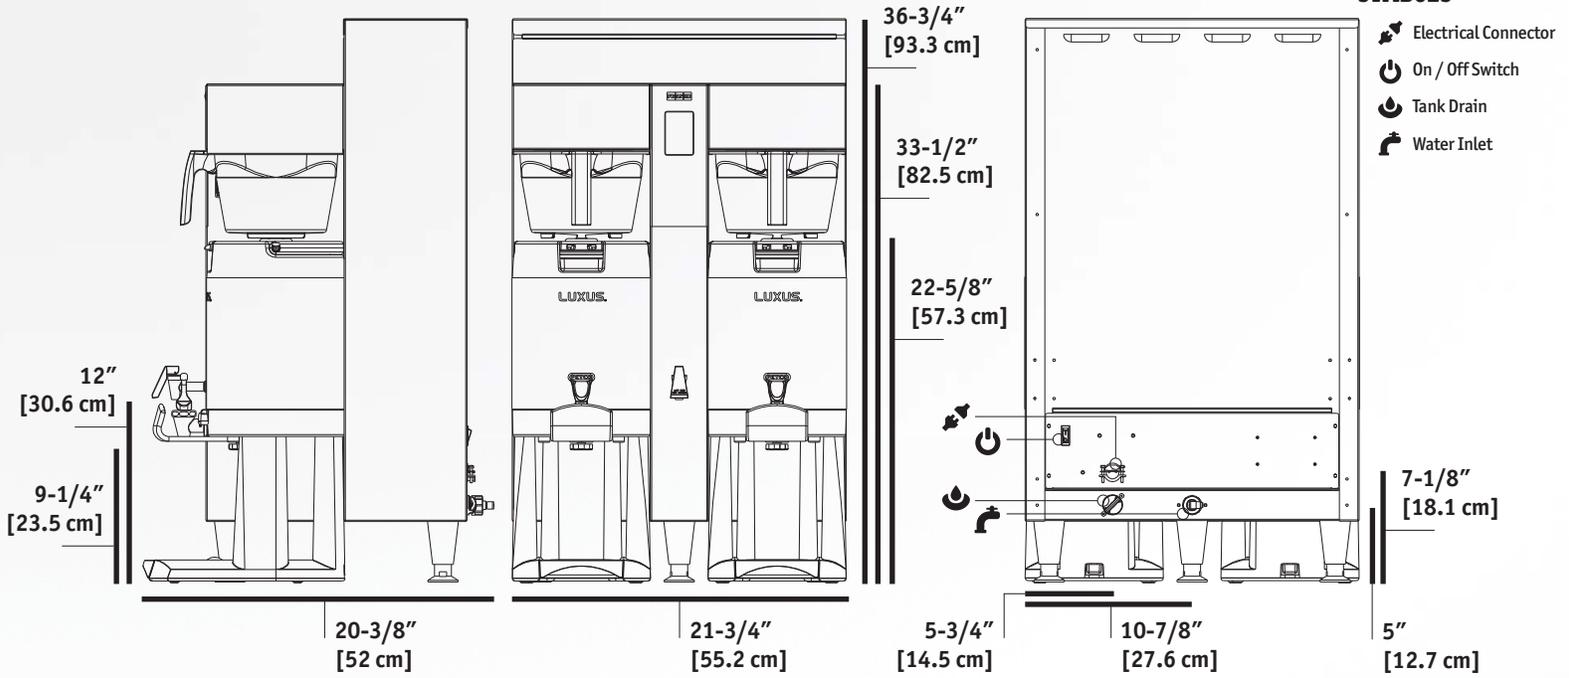

Gallery



MANUFACTURED
★ IN THE USA ★

Features & Benefits



	Feature	Benefit
1	Touchscreen Interface	Allows for quick and easy access to brew controls.
2	Brew Basket Sensors	Automatically discontinues operation of brew cycle if basket is removed.
3	Mixed Material Construction	Mixed material is attractive and comfortable in any front-of-house setting.
4	Manual Water Faucet	Safely dispenses hot water away from steam and brew basket.
5	Stainless Steel Finish	Withstands the harshest foodservice environments and is durable and easy to clean.

Dispensers sold separately.

FETCO

© Copyright 2014 FETCO®, Driven to Innovation™
is a mark of Food Equipment Technologies Company.

 fetco.com

SS14006

 847.719.3000
1.800.338.2699 USA
 847.719.3001

 Food Equipment Technologies Co.
600 Rose Road
Lake Zurich, IL 60047
USA