



2.0 GALLON COFFEE BREWING SYSTEM

CBS-2150 TOUCHSCREEN SERIES




Shown with L3D-20 Luxus® Dispenser
(sold separately)

The 2.0 Gallon CBS-2152XTS-2G Touchscreen Series Coffee Brewers provide flexibility in medium-to-large sized venues such as Banquet Halls, Cafeterias and Restaurants. Simplify your daily operations and experience total control of this fully featured Extractor® Brewing System via an inviting touchscreen interface display that is intuitive, easy to read and simple to navigate.




User Friendly Touchscreen

Access all controls via a touchscreen interface display to provide instant visual feedback during programming, diagnostics or the brew cycle.



Cascading Spray Dome™

Hot tank water flows over clog-free channels built into the dome and virtually eliminates spray head scale buildup.

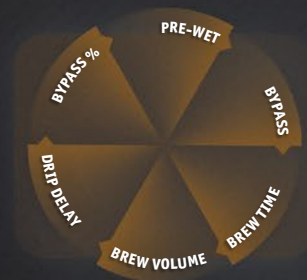

Legendary Extractor® Control

Take your coffee to its peak level by unlocking the full freshness, aroma and flavor of your taste profile.



Energy Efficient Design

Superior tank insulation and patented heat recovery method allow you to lower overall energy costs.

Water Specification

| | | |
|--|---|--|
| Water Inlet 3/8" male flare fitting | Minimum Flow Rate 1 1/2 gpm [5.71 lpm] | Water Pressure 20-75 psig [138-517 kPa] |
|--|---|--|


Electrical Configuration

| Plastic Brew Basket Configuration Code | Stainless Steel Brew Basket Configuration Code | Heater Configuration | Voltage | Phase | Wires | KW | Electrical Connection | Max Amp Draw | Gallon [Liter] / Hour |
|--|--|----------------------|---------|------------------|-------|-----------|-----------------------|--------------|-----------------------------|
| US & CANADA | | | | | | | | | |
| E215351 | E215351M | 2 x 3.0 kW | 208-240 | 1 ⁽²⁾ | 2+G | 4.6-6.1 | Terminal Block | 22.4-25.8 | 15.3 [58.0] ⁽¹⁾ |
| | | 3 x 3.0 kW | 208-240 | 3 | 3+G | 6.9-9.1 | Terminal Block | 19.5-22.5 | 22.5 [85.0] ⁽¹⁾ |
| E215352 | E215352M | 2 x 5.0 kW | 208-240 | 1 ⁽²⁾ | 2+G | 7.6-10.1 | Terminal Block | 36.9-42.5 | 25.3 [97.0] ⁽¹⁾ |
| | | 3 x 5.0 kW | 208-240 | 3 | 3+G | 11.4-15.1 | Terminal Block | 32.0-36.9 | 38.3 [145.0] ⁽¹⁾ |
| E215353 | E215353M | 2 x 4.0 kW | 208-240 | 1 ⁽²⁾ | 2+G | 6.1-8.1 | Terminal Block | 29.3-33.8 | 19.8 [75.0] ⁽¹⁾ |
| | | 3 x 4.0 kW | 208-240 | 3 | 3+G | 11.4-15.1 | Terminal Block | 25.6-29.6 | 29.5 [112.0] ⁽¹⁾ |

(1) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 200°F water. 2 gallons per batch.
 (2) 1 or 3 phase configuration is field selectable by user. Sold factory configured for single phase 2 wire plus ground.

Measurements

| | | | | | | | | |
|--------------------------------|-------------------------------|-------------------------------|-------------------------------------|---------------------------------------|--|--|-------------------------------------|---|
| Height 38 7/8" [98.6 cm] | Width 21 3/4" [55.2 cm] | Depth 20 3/8" [51.8 cm] | Empty Weight 82 lbs [37.0 kg] | Filled Weight 180 lbs [81.6 kg] | Combined Filled Weight 234 lbs [106.3 kg] <small>BREWER + 2 FILLED L3D-20 DISPENSERS</small> | Hot Water Tank Cap. 11.5 gal [43.7 l] | Shipping Weight 96 lbs [43.5 kg] | Shipping Dimensions 22" x 27" x 37" [56.0 x 68.6 x 94.0 cm] |
|--------------------------------|-------------------------------|-------------------------------|-------------------------------------|---------------------------------------|--|--|-------------------------------------|---|

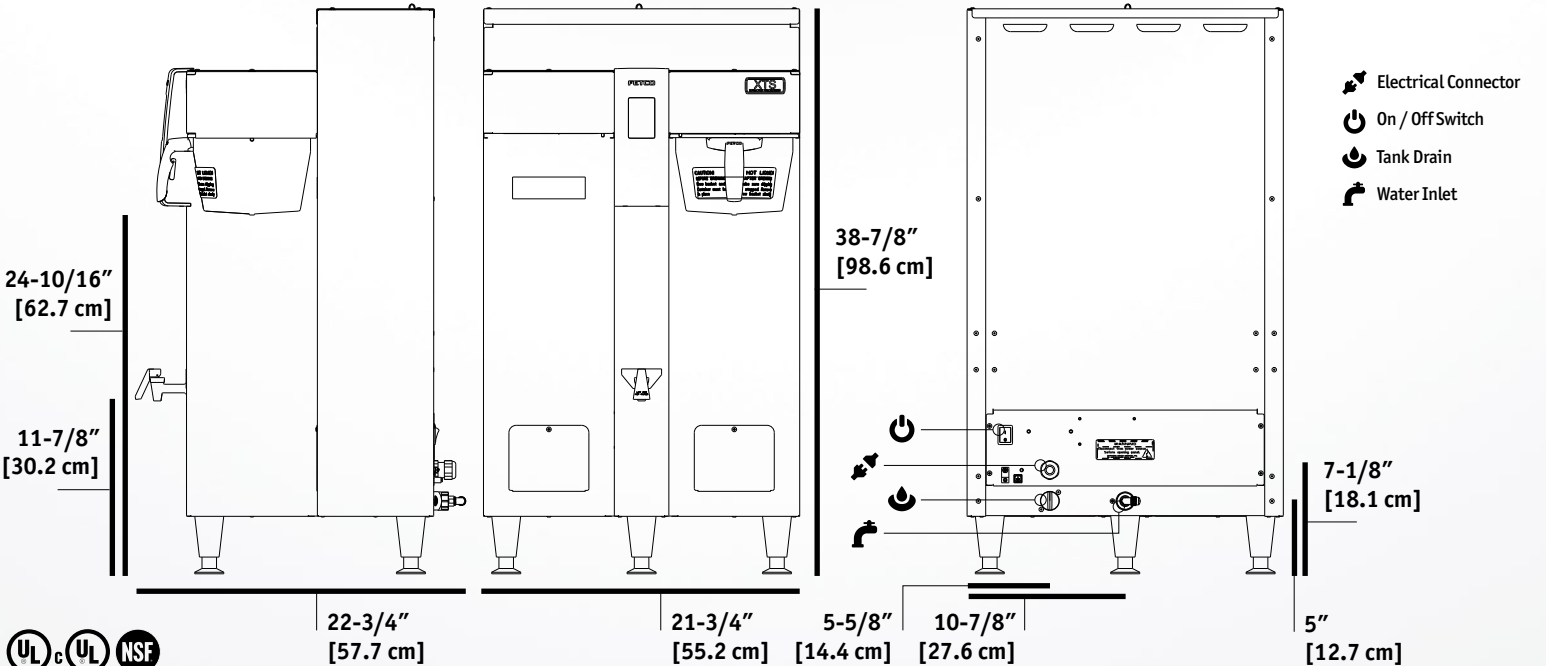

Compatible Dispenser

| | |
|--|------|
| 2.0 Gallon LUXUS® Thermal Server (L3S-20) Must be used with S3S Serving Stations. | D053 |
| 2.0 Gallon LUXUS® Thermal Dispenser (L3D-20) | D050 |

Customize Your Brewer

| | |
|---|------|
| Single Serving Station for L3S-15/20 Server | A097 |
| Twin Serving Station for L3S-15/20 Server | A098 |
| Triple Serving Station for L3S-15/20 Server | A099 |

Cups per Hour*

| | | | |
|-----------------|------------------|------------------|------------------|
| 8oz. 614 | 12oz. 410 | 16oz. 307 | 20oz. 246 |
|-----------------|------------------|------------------|------------------|

* Approximate based on maximum power setting.

Coffee Filter

15" x 5.5" (500/Case) F001

Information

fetco.com

800.338.2699 USA
847.719.3000

847.719.3001

Food Equipment Technologies Co.
600 Rose Road
Lake Zurich, IL 60047
USA