


The Ultimate Coffee Machine.

Your Answer to Brewing The Best Tasting Coffee
Consistently Day After Day...

Developed with proprietary designs and technologies, FETCO equipment ensures safety and integrity of each brew with innovative designs such as:



- Dual Brew Basket Safety Locks Incorporated Into Start Switch



- Stainless Steel Gourmet Size Brew Baskets Designed For Heavier Brew Ratios



- Brewing Directly Into Our Patented LUXUS Dispensers To Ensure A Continuous Flow of Hot, Aromatic, Great Tasting Coffee

Fetco Brewers Utilize The Most Recent Technological Advances In Coffee Brewing In Order To:

- Hold A Constant Water Temperature During 100% Of Brew Cycle
- Maintain Sprayover Volume Consistency
- Resist Lime Buildup Inside Dispense Tube System
- Utilize All Solid State Components



The LUXUS Thermal Dispenser
Totally portable, requires no electric power.

Once filled and capped, it goes anywhere... Ready To Act As Your Remote Dispensing Station Wherever Needed

You can prepare them ahead of time and place them where you want them. It is important to note that the LUXUS thermal dispenser can be staff-operated or used as a self-service system



CBS-52H20 in Stainless Steel finish and with 2.0 Gallon LUXUS Dispensers

CBS-52H20

Standard Features:

- 2.0 Gal. Thermal, All Stainless Steel Lined Beverage Dispensers
- Stainless Steel, Gourmet Size Brew Baskets
- Brew Basket Safety Locks
- Open Type, Leak Free Dispense System
- Fully Automatic With Electronic Temperature Control
- Mercury-Type Power Contactor
- Two-Level Water Tank Drain System
- Total Serviceability From The Front


Optional Features:

- Half Batch Brewing Capability
- Iced Tea Brewing Capability
- Color Stainless Steel Finish
- Custom & Export Voltage

Accessories:

- 2.0 Gallon Luxus Dispensers
- Single, Dual & Triple Serving Stations (for Luxus Server LS Models Only)
- Brewing Stand For Luxus Server LS Models

Dimensions & Specifications

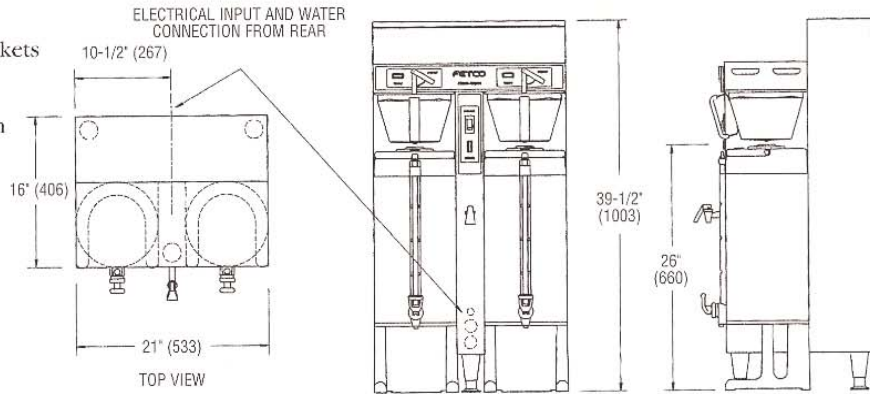

Water Requirements: 20-75 psig, 1-1/4 gpm flow rate. Water inlet is 3/8 Male Flare

Standard Electrical Configurations & Brewing Efficiency

| Electrical Config. Code | Heater Configuration | Voltage | Phase | Wires | KW | Maximum Amp draw | Brews per Hour | |
|-------------------------|----------------------|---------|-------|------------|------|------------------|----------------|-----------|
| | | | | | | | Cold Water | Hot Water |
| CBS-52H20-1 | 2 x 3000 watt | 120/208 | 1 ph. | 3 + ground | 4.6 | 22.4 | 5.8 | 9.9 |
| | | 120/220 | 1 ph. | 3 + ground | 5.2 | 23.7 | 6.5 | 11.0 |
| | | 120/240 | 1 ph. | 3 + ground | 6.1 | 25.8 | 7.6 | 13.1 |
| CBS-52H20-2 | 2 x 4000 watt | 120/208 | 1 ph. | 3 + ground | 6.1 | 29.6 | 7.6 | 13.1 |
| | | 120/220 | 1 ph. | 3 + ground | 6.8 | 31.3 | 8.6 | 14.7 |
| | | 120/240 | 1 ph. | 3 + ground | 8.1 | 34.1 | 10.2 | 15.0 |
| CBS-52H20-3 | 3 x 3000 watt | 120/208 | 3 ph. | 4 + ground | 6.9 | 19.5 | 8.6 | 14.8 |
| | | 120/220 | 3 ph. | 4 + ground | 7.7 | 20.5 | 9.7 | 15.0 |
| | | 120/240 | 3 ph. | 4 + ground | 9.1 | 22.4 | 11.6 | 15.0 |
| CBS-52H20-4 | 3 x 4000 watt | 120/208 | 3 ph. | 4 + ground | 9.1 | 25.8 | 11.6 | 15.0 |
| | | 120/220 | 3 ph. | 4 + ground | 10.3 | 27.3 | 12.9 | 15.0 |
| | | 120/240 | 3 ph. | 4 + ground | 12.1 | 29.7 | 15.0 | 15.0 |

Weights & Capacities

| MODEL | HEIGHT | WIDTH | DEPTH | BREWER EMPTY | BREWER FILLED | DISPENSER EMPTY | DISPENSER FILLED | BREWER & DISP FILLED | WATER TANK | DISPENSER | SHIPPING WEIGHT | CU. FT. |
|-----------|-----------|--------|--------|--------------|---------------|-----------------|------------------|----------------------|------------|-----------|-----------------|-----------|
| | in/mm | in/mm | in/mm | lbs/kg | lbs/kg | lbs/kg | lbs/kg | lbs/kg | gal/l | gal/l | lbs/kg | ft/cu dec |
| CBS 52H20 | 39.5/1003 | 21/533 | 16/406 | 87/39.5 | 150/68.0 | 10.0/4.5 | 26.6/12.1 | 203.2/92.2 | 7.6/28.72 | 2.0/7.6 | 127/58.0 | 11.8/334 |

Patents & Approvals:

U.S. Pat. Nos. 5,000,082; 5,331,885. Other patents pending. LUXUS is a registered U. S. Trademark No.: 1797027



FETCO Corporation is a proud and active member of these organizations:



Food Equipment Technologies Company, Inc.
640 Heathrow Drive, Lincolnshire, IL 60069 USA
Phone: 847.821.1177 800-FETCO 99 Fax: 847.821.1178
Internet: www.fetco.com E-mail: sales@fetco.com