



APPLICATION:		PRODUCT NAME: UTILITY SPRAY HOSE ASSEMBLY	
JOB NAME:		<input type="checkbox"/> SPECIAL CONFIGURATION <input type="checkbox"/> CHECK BASE MODEL AND OPTIONS	
QUANTITY:	ITEM NO.	MODEL: <input type="checkbox"/> 1457	
		OPTIONS OR MODIFICATIONS: <input type="checkbox"/> OTHER _____	
		FEATURES	
		HOSE * 60" LENGTH * STAINLESS STEEL END FITTINGS * STAINLESS STEEL EXTERNAL JACKET * 3-PLY FIBER REINFORCED INTERNAL RUBBER HOSE * REPAIRABLE IN-FIELD WITH SIMPLE TOOLS	
		UTILITY SPRAY VALVE * NOZZLE THREADED INTO VALVE * BRONZE HANDLE - NOT PLASTIC - MEANS FULL "ON" * SHOWER SPRAY PATTERN * 45° ANGLED HEAD * FITS ALL BRANDS * 2.65 GPM AT 80 PSI	
		SYSTEM LIMITS * TEMP: 40°F MIN. TO 140°F MAX. * PRESSURE: 200 PSI MAX. STATIC	
		SHIPPING WEIGHT * 4.5 LBS	
 FISHER MANUFACTURING COMPANY TOLL FREE: 800-421-6162 - FAX: 800-832-8238 information@fisher-mfg.com - www.fisher-mfg.com			

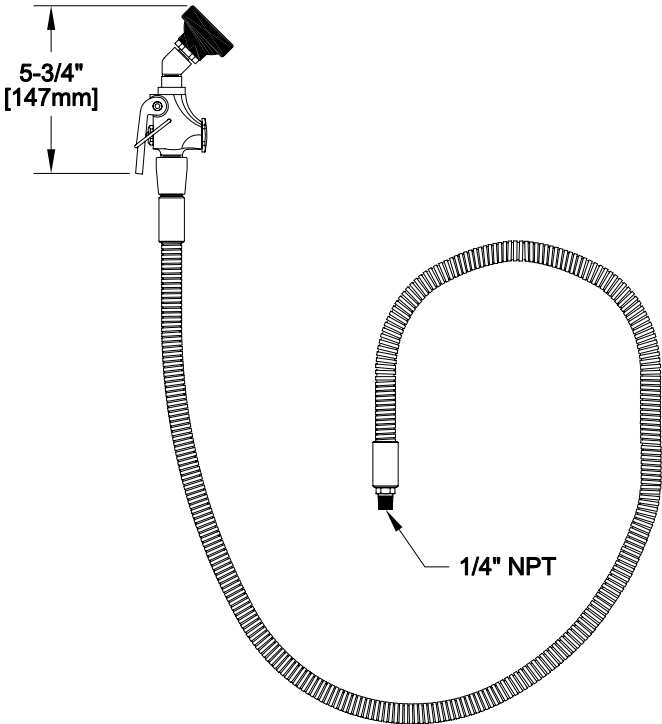

ANSI/A112.18.1M