


APPLICATION:
 JOB NAME:
 QUANTITY: ITEM NO.

PRODUCT NAME:
 PRE-RINSE SPRING STYLE
 WALL MOUNT
 SPECIAL CONFIGURATION
 ■ 80160 CHECK BASE MODEL AND OPTIONS
 MODEL:
 ■ 2210-WB ULTRA SPRAY VALVE W/ WALL BRACKET
 □ 2210 ULTRA SPRAY VALVE NO WALL BRACKET

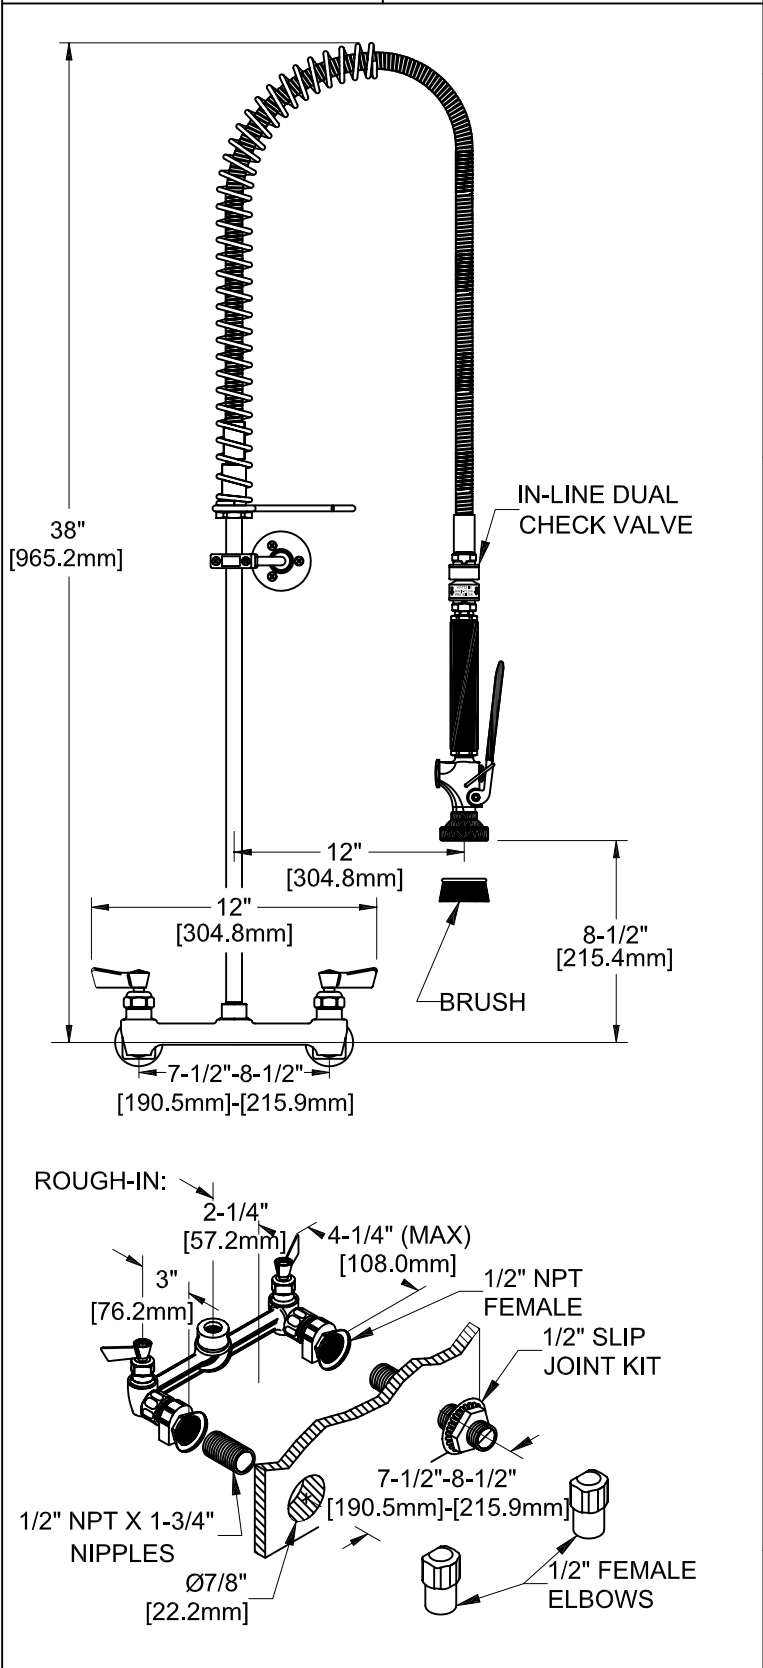

OPTIONS OR MODIFICATIONS:
 □ SUPPLY LINES (24" OR 36") CIRCLE LENGTH
 □ ADD-ON FAUCET (6", 8", 10", 12", 14", 16") CIRCLE
 ■ IN-LINE DUAL CHECK VALVE
 ■ BRUSH
 ■ NIPPLES
 ■ ELBOWS
 □ HANDLES (CROSS OR WRIST) CIRCLE STYLE
 □ VANDAL RESISTANT KIT
 □ OTHER _____

FEATURES
 CONTROL VALVE
 * ECCENTRICS ADJUST FROM 7-1/2" TO 8-1/2"
 * INTERNAL SPRING LOADED CHECK VALVES
 * HOT SIDE STEM - RIGHT HAND
 * COLD SIDE STEM - LEFT HAND
 * SWIVELLING SEAT DISKS
 * STAINLESS STEEL SEATS
 * STAINLESS STEEL SEAT SCREWS
 * STAINLESS STEEL HANDLE SCREWS

HOSE
 * 36" LENGTH
 * STAINLESS STEEL END FITTINGS
 * STAINLESS STEEL EXTERNAL JACKET
 * 3-PLY FIBER REINFORCED INTERNAL RUBBER HOSE
 * REPAIRABLE IN-FIELD WITH SIMPLE TOOLS

ULTRA SPRAY VALVE
 * LOWEST ENERGY USER - 1.15 GPM @ 60 PSI
 * CLEANS FASTER - TEST PROVEN
 * ENGINEERED TO LAST - NO 'O' RINGS TO LEAK
 * INTERCHANGEABLE - FITS ALL BRANDS

WALL BRACKET
 * ADJUSTS FROM 2" TO 12"

SYSTEM LIMITS
 * TEMP: 40°F MIN. TO 140°F MAX.
 * PRESSURE: 200 PSI MAX. STATIC

SHIPPING WEIGHT
 * 12.0 LBS

FISHER
 FISHER MANUFACTURING COMPANY
 TOLL FREE: 800-421-6162 - FAX: 800-832-8238
 information@fisher-mfg.com - www.fisher-mfg.com