

APPLICATION:


JOB NAME:

QUANTITY: ITEM NO.

PRODUCT NAME:
8" ADJUSTABLE WALL MOUNT UTILITY SPRAY

SPECIAL CONFIGURATION
 CHECK BASE MODEL AND OPTIONS

MODEL:
 2260

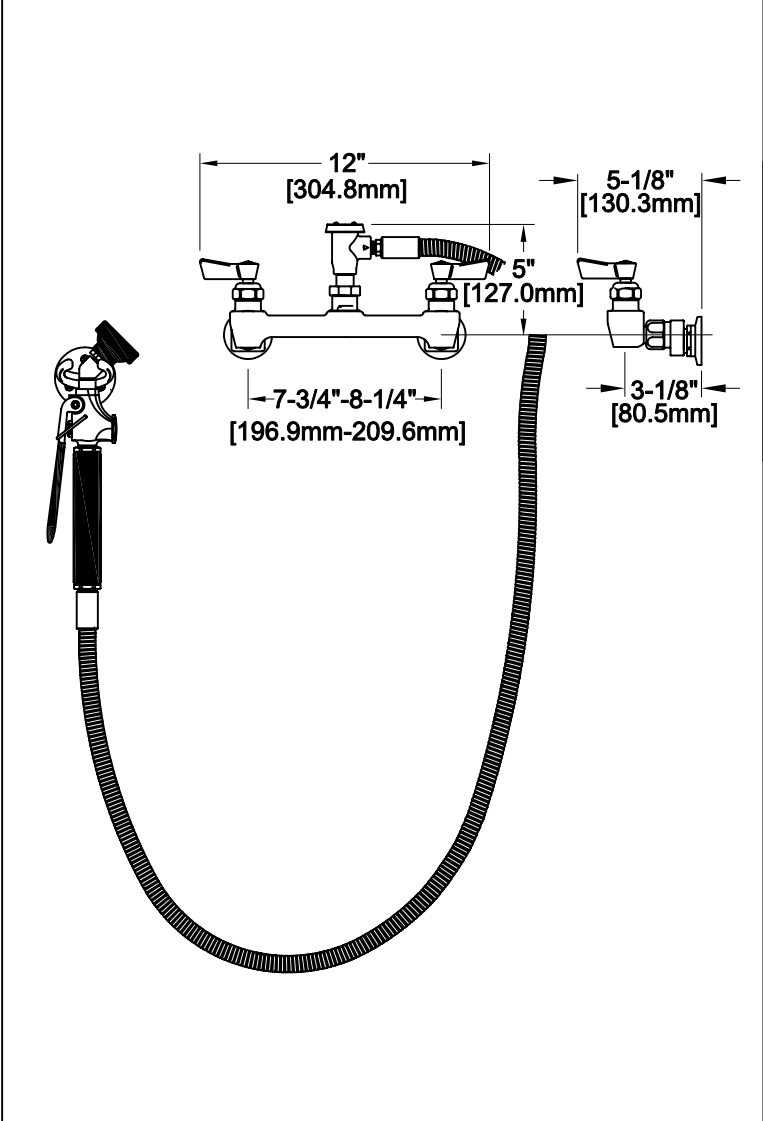

- OPTIONS OR MODIFICATIONS
- SUPPLY LINES (24" OR 36") CIRCLE LENGTH
 - ADD-ON FAUCET (6", 8", 10", 12", 14", 16") CIRCLE
 - BACKFLOW PREVENTER
 - PIPE HOOK
 - NIPPLES
 - ELBOWS
 - BRUSH
 - VANDAL RESISTANT KIT
 - HANDLES (CROSS OR WRIST) CIRCLE STYLE
 - OTHER _____

- FEATURES:
- CONTROL VALVE**
- *ECCENTRICS ADJUST FROM 7-1/2" TO 8-1/2"
 - *INTERNAL SPRING LOADED CHECK VALVES
 - *SWIVELLING SEAT DISKS
 - *HOT SIDE STEM - RIGHT HAND
 - *COLD SIDE STEM - LEFT HAND
 - *STAINLESS STEEL SEATS
 - *STAINLESS STEEL SEAT SCREWS
 - *STAINLESS STEEL HANDLE SCREWS
- HOSE**
- *60" LENGTH
 - *STAINLESS STEEL END FITTINGS
 - *STAINLESS STEEL EXTERNAL JACKET
 - *3-PLY FIBER REINFORCED INTERNAL RUBBER HOSE
 - *REPAIRABLE IN FIELD WITH SIMPLE TOOLS

- UTILITY SPRAY VALVE**
- *NOZZLE THREADED INTO VALVE
 - *2.65 GPM AT 80 PSI
 - *SHOWER SPRAY PATTERN
 - *45° ANGLED HEAD

- SWIVEL ELBOW**
- *360° TURNING RADIUS
 - *ATMOSPHERIC VACUUM BREAKER

- SYSTEM LIMITS**
- *TEMP: 40°F MIN. TO 140°F MAX.
 - *PRESSURE 200 PSI MAX. STATIC

- SHIPPING WEIGHT**
- *9.0 LBS

ROUGH-IN:

