
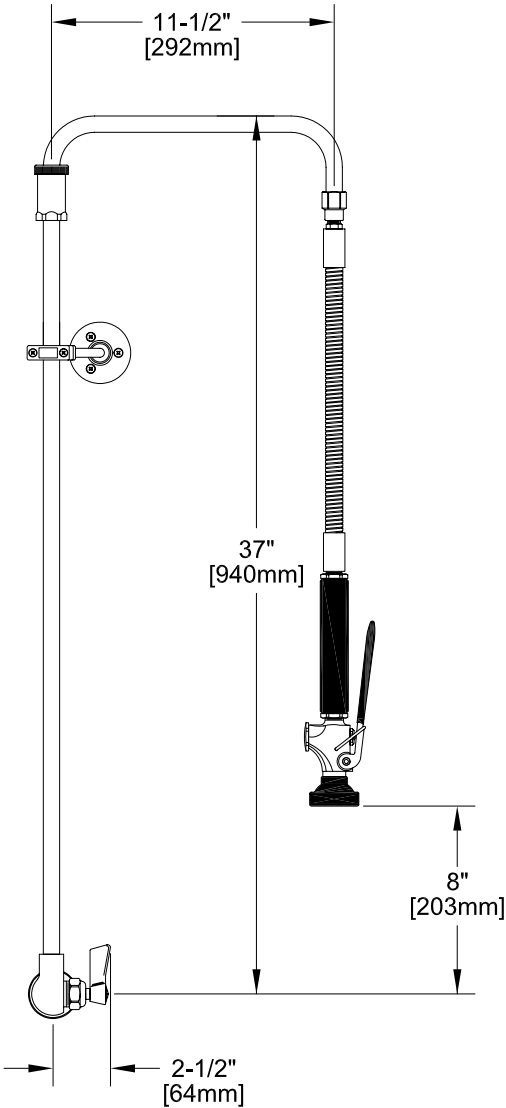


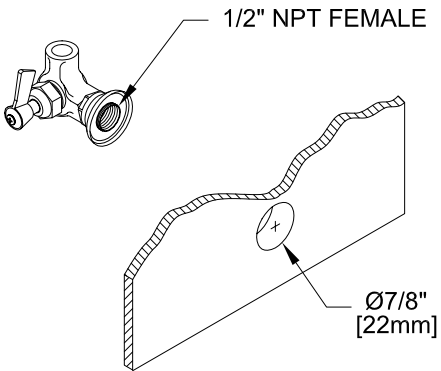

APPLICATION:		PRODUCT NAME: PRE-RINSE, SWIVEL STYLE, BACKSPASH MOUNT	
JOB NAME:		<input type="checkbox"/> SPECIAL CONFIGURATION <input type="checkbox"/> CHECK BASE MODEL AND OPTIONS	
QUANTITY:	ITEM NO.	MODEL: <input type="checkbox"/> 2711 ULTRA SPRAY VALVE NO WALL BRACKET <input type="checkbox"/> 2711-WB ULTRA SPRAY VALVE W/ WALL BRACKET	
 <p>11-1/2" [292mm]</p> <p>37" [940mm]</p> <p>8" [203mm]</p> <p>2-1/2" [64mm]</p>		OPTIONS OR MODIFICATIONS: <input type="checkbox"/> SUPPLY LINES (24" OR 36") CIRCLE LENGTH <input type="checkbox"/> ADD-ON FAUCET (6", 8", 10", 12", 14", 16") CIRCLE <input type="checkbox"/> IN-LINE DUAL CHECK VALVE <input type="checkbox"/> PIPE HOOK <input type="checkbox"/> BRUSH <input type="checkbox"/> NIPPLES <input type="checkbox"/> ELBOWS <input type="checkbox"/> HANDLES (CROSS OR WRIST) CIRCLE STYLE <input type="checkbox"/> VANDAL RESISTANT KIT <input type="checkbox"/> OTHER _____	
		FEATURES CONTROL VALVE * SINGLE WALL MOUNT * STEM - RIGHT HAND * SWIVELLING SEAT DISKS * HOT AND COLD INDEX BUTTONS * STAINLESS STEEL SEATS * STAINLESS STEEL SEAT SCREWS * STAINLESS STEEL HANDLE SCREWS HOSE * 15-1/2" LENGTH * STAINLESS STEEL END FITTINGS * STAINLESS STEEL EXTERNAL JACKET * 3-PLY FIBER REINFORCED INTERNAL RUBBER HOSE ULTRA SPRAY VALVE * LOWEST ENERGY USER - 1.15 GPM @ 60 PSI * CLEANS FASTER - TEST PROVEN * ENGINEERED TO LAST - NO 'O' RINGS TO LEAK * INTERCHANGEABLE - FITS ALL BRANDS SYSTEM LIMITS * TEMP: 40°F MIN. TO 140°F MAX. * PRESSURE: 200 PSI MAX. STATIC SHIPPING WEIGHT * 10.0 LBS	
ROUGH-IN:  <p>1/2" NPT FEMALE</p> <p>Ø7/8" [22mm]</p>			
EPAct 2005 Compliant		 ANSI/A112.18.1M	
		 FISHER MANUFACTURING COMPANY TOLL FREE: 800-421-6162 - FAX: 800-832-8238 information@fisher-mfg.com - www.fisher-mfg.com	