

APPLICATION:

PRODUCT NAME:

**POT FILLER HOSE STYLE
SINGLE WALL MOUNT**

JOB NAME:

☐ _____ SPECIAL CONFIGURATION
(CHECK BASE MODEL AND OPTIONS)

QUANTITY:

ITEM NO.:

MODEL:

☐ 2750

OPTIONS OR MODIFICATIONS:

- ☐ SUPPLY LINES (24" OR 36") CIRCLE LENGTH
☐ ADD-ON FAUCET (6", 8", 10", 12", 14", 16") CIRCLE LGTH
☐ BACKFLOW PREVENTER
☐ PIPE HOOK
☐ NIPPLES
☐ ELBOWS
☐ VANDAL RESISTANT KIT
☐ HANDLES (CROSS OR WRIST) CIRCLE STYLE
☐ OTHER _____

FEATURES:

CONTROL VALVE

- * SINGLE WALL MOUNT
- * STEM - RIGHT HAND
- * SWIVELING SEAT DISKS
- * HOT & COLD INDEX BUTTONS
- * STAINLESS STEEL SEATS
- * STAINLESS STEEL SEAT SCREWS
- * STAINLESS STEEL HANDLE SCREWS

HOSE

- * 60" LENGTH
- * STAINLESS STEEL END FITTINGS
- * STAINLESS STEEL EXTERNAL JACKET
- * BRAIDED USDA APPROVED FOODGRADE
INTERNAL HOSE
- * REPAIRABLE IN FIELD WITH SIMPLE TOOLS

POT FILLER VALVE

- * NON SCRATCHING/ MARRING TUBE
- * 5.00 GPM AT 80 PSI
- * AERATED STREAM

SWIVEL ELBOW



- * 360° TURNING RADIUS

SYSTEM LIMITS



- * TEMP: 40°F MIN. TO 140°F MAX.
- * PRESSURE 200 PSI MAX. STATIC

SHIPPING WEIGHT

- * 6.5 LBS

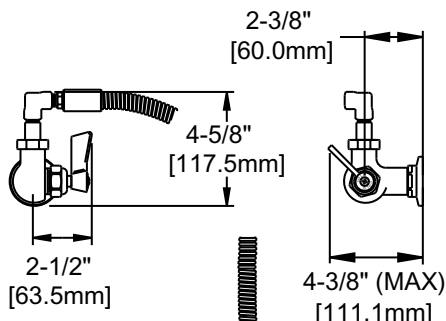60" LENGTH
HOSE

ROUGH-IN:



ANSI/A112.18.1M, ANSI/NSF 61.9

FISHER

FISHER MANUFACTURING COMPANY
TOLL FREE: 800-421-6162 - FAX: 800-832-8238
information@fisher-mfg.com - www.fisher-mfg.com