


APPLICATION:	
JOB NAME:	
QUANTITY:	ITEM NO.:

PRODUCT NAME: EXPOSED REEL RINSE WALL MOUNTED WITH SPRAY VALVE
<input type="checkbox"/> SPECIAL CONFIGURATION CHECK BASE MODEL AND OPTIONS
MODEL: <input checked="" type="checkbox"/> 2980

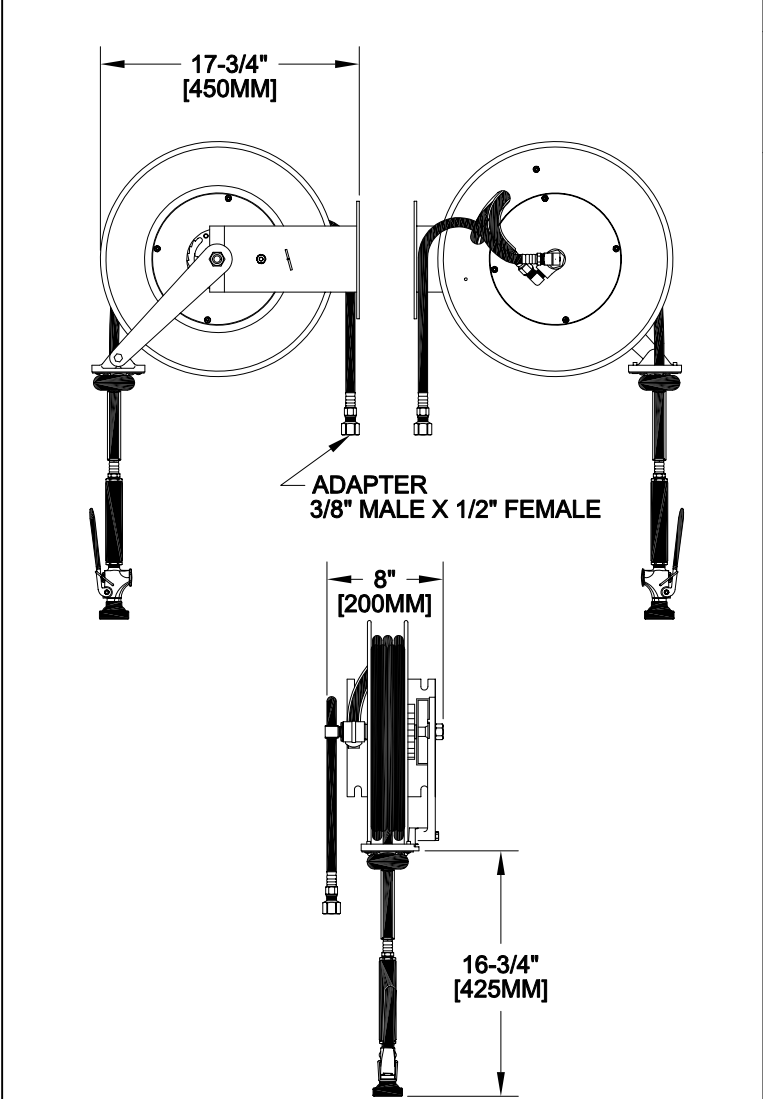

OPTIONS OR MODIFICATIONS: <input type="checkbox"/> BRUSH <input type="checkbox"/> OTHER _____
---

**FEATURES**


- REEL**
- \* SELF-LOCKING
  - \* EXPOSED HOSE
  - \* 35' LENGTH REEL HOSE
  - \* 19" LENGTH INLET HOSE
  - \* 3 PLY FIBER REINFORCED RUBBER HOSE
  - \* ADJUSTABLE BALL STOP

- PRO SPRAY VALVE**
- \* NOZZLE THREADED INTO VALVE
  - \* 2.65 GPM AT 80 PSI
  - \* SHOWER SPRAY PATTERN

- SYSTEM LIMITS**
- \* TEMP: 40°F MIN. TO 140°F MAX.
  - \* PRESSURE: 200 PSI MAX. STATIC

- SHIPPING WEIGHT**
- \* 34.0 LBS

ROUGH-IN: SEE MOUNTING PLATE BELOW

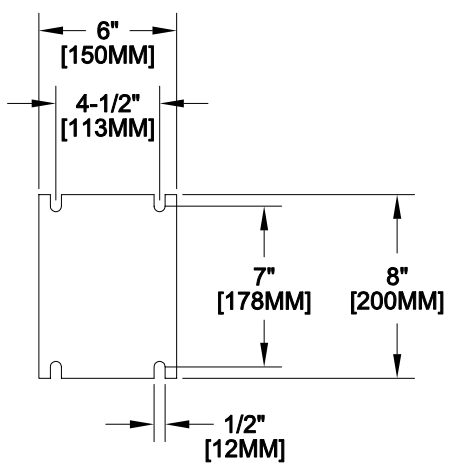

**FISHER**  
FISHER MANUFACTURING COMPANY  
TOLL FREE: 800-421-6162 - FAX: 800-832-8238  
information@fisher-mfg.com - www.fisher-mfg.com