

APPLICATION:

PRODUCT NAME:
RIGID GOOSENECK SPOUT ASSEMBLY

JOB NAME:

_____ SPECIAL CONFIGURATION
 _____ CHECK BASE MODEL AND OPTIONS

QUANTITY:

ITEM NO.

MODEL:
 3966 12" RIGID GOOSENECK SPOUT
 9041 10" RIGID GOOSENECK SPOUT
 3969 6" RIGID GOOSENECK SPOUT

OPTIONS OR MODIFICATIONS:
 OTHER _____

FEATURES


- * 2.2 GPM AERATOR

SYSTEM LIMITS

- * TEMP: 40°F MIN. TO 140°F MAX.
- * PRESSURE: 200 PSI MAX. STATIC

SHIPPING WEIGHT

- * 0.75 LBS

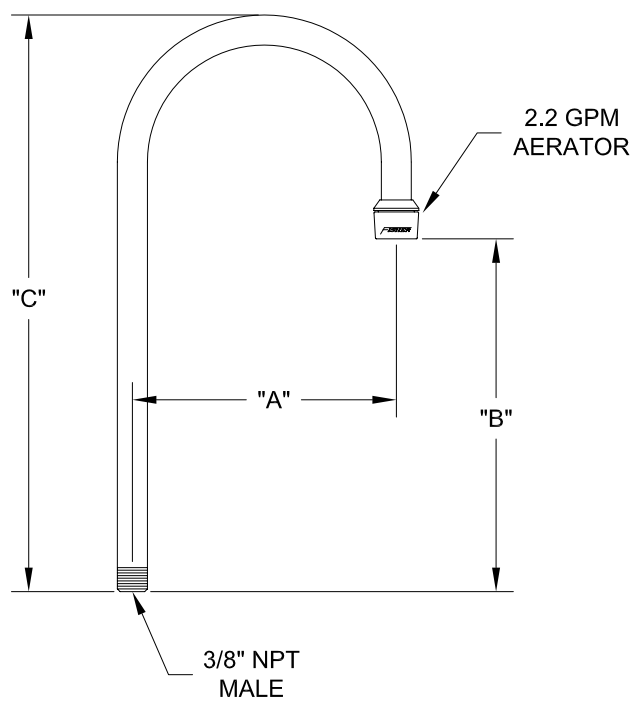

MODEL	DIM "A"	DIM "B"	DIM "C"
3966	5-1/2" [140mm]	7-3/8" [187mm]	12" [304mm]
9041	5-1/2" [140mm]	5-1/8" [130mm]	9-1/2" [241mm]
3969	3-1/2" [89mm]	3-3/8" [86mm]	7" [180mm]

ANSI/A112.18.1M

FISHER
 FISHER MANUFACTURING COMPANY
 TOLL FREE: 800-421-6162 - FAX: 800-832-8238
 information@fisher-mfg.com - www.fisher-mfg.com