


APPLICATION: PRODUCT NAME:
 8" ADJUSTABLE WALL MOUNT UTILITY
 SPRAY WITH 96" HOSE

JOB NAME: ■ 80926 SPECIAL CONFIGURATION
 (CHECK BASE MODEL AND OPTIONS)

QUANTITY: ITEM NO. MODEL:
 ☒ 2250

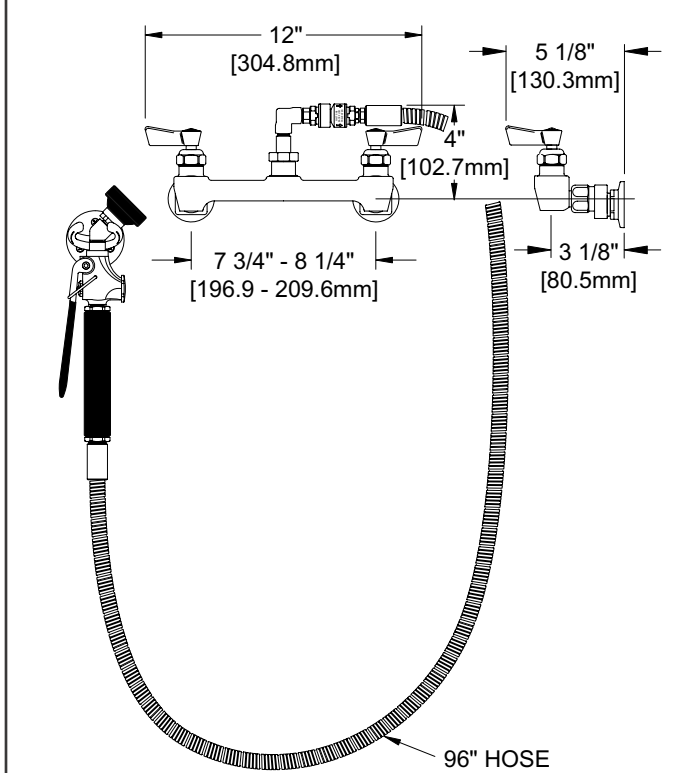

- OPTIONS OR MODIFICATIONS
- SUPPLY LINES (24" OR 36") CIRCLE LENGTH
 - ADD-ON FAUCET (6", 8", 10", 12", 14", 16") CIRCLE
 - BACKFLOW PREVENTER
 - PIPE HOOK
 - NIPPLES
 - ELBOWS
 - BRUSH
 - VANDAL RESISTANT KIT
 - HANDLES (CROSS OR WRIST) CIRCLE STYLE
 - OTHER: 96" HOSE

- FEATURES:
- CONTROL VALVE
- * ECCENTRICS ADJUST FROM 7 1/2" TO 8 1/2"
 - * INTERNAL SPRING LOADED CHECK VALVES
 - * SWIVELLING SEAT DISKS
 - * HOT SIDE STEM - RIGHT HAND
 - * COLD SIDE STEM - LEFT HAND
 - * STAINLESS STEEL SEATS
 - * STAINLESS STEEL SEAT SCREWS
 - * STAINLESS STEEL HANDLE SCREWS


- HOSE
- * 96" LENGTH
 - * STAINLESS STEEL END FITTINGS
 - * STAINLESS STEEL EXTERNAL JACKET
 - * 3-PLY FIBER REINFORCED INTERNAL RUBBER HOSE
 - * REPAIRABLE IN FIELD WITH SIMPLE TOOLS

- UTILITY SPRAY VALVE
- * NOZZLE THREADED INTO VALVE
 - * 2.65 GPM AT 80 PSI
 - * SHOWER SPRAY PATTERN
 - * 45° ANGLED HEAD

- SWIVEL ELBOW
- * 360° TURNING RADIUS

- SYSTEM LIMITS
- * TEMP: 40°F MIN. TO 140°F MAX. STATIC
 - * PRESSURE 200 PSI MAX. STATIC
 - * SHIPPING WEIGHT: 8.0 LBS

ROUGH-IN:

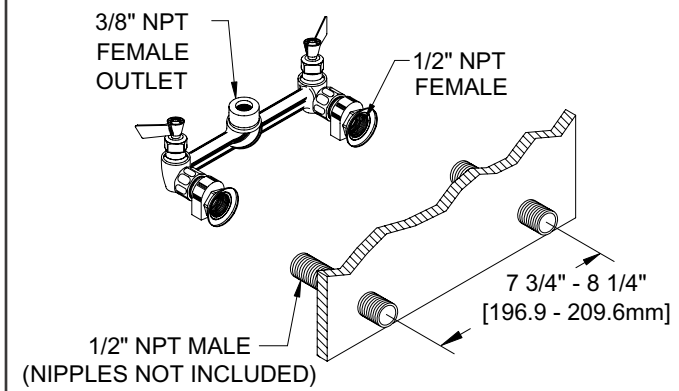

FISHER MANUFACTURING COMPANY
 TOLL FREE: 800-421-6162 - FAX: 800-832-8238
 information@fisher-mfg.com - www.fisher-mfg.com

ANSI/A112.18.1M