

PRODUCT NAME:

SINGLE BACKSPLASH BASE

- _____ SPECIAL CONFIGURATION
(CHECK BASE MODEL AND OPTIONS)

MODEL:

- 3916 W/ 12" RIGID GOOSENECK SPOUT
- 9131 W/ 6" RIGID GOOSENECK SPOUT

OPTIONS OR MODIFICATIONS:

- SUPPLY LINES (24" OR 36") CIRCLE LENGTH
- ELBOWS
- VANDAL RESISTANT KIT
- OTHER _____

FEATURES:


- * SINGLE BACKSPLASH

SYSTEM LIMITS

- * TEMP: 40°F MIN. TO 140°F MAX.
- * PRESSURE 200 PSI MAX. STATIC
- * 2.20 GPM @ 60 PSI


SHIPPING WEIGHT

- * 3.0 LBS

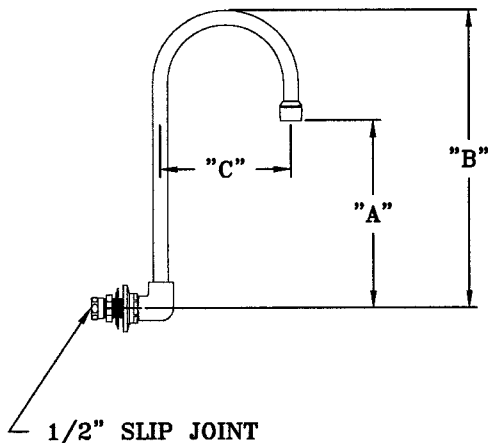

MODEL	DIM "A"	DIM "B"	DIM "C"
3916	6-5/16" [154.0mm]	10-1/8" [257.2mm]	5-1/2" [139.7mm]
9131	4-11/16" [119.1mm]	7-1/8" [181.0mm]	3-1/2" [88.90mm]

ROUGH-IN:



ANSI/A112.18.1M

FISHER MANUFACTURING COMPANY