

APPLICATION:

JOB NAME:

QUANTITY:

ITEM NO.:

PRODUCT NAME:

PRE-RINSE SPRING STYLE  
8" C/C BACKSPLASH MOUNT

96776 SPECIAL CONFIGURATION

MODEL: (CHECK BASE MODEL AND OPTIONS)

- ☐ 13390 STD SPRAY VALVE w/WALL BRACKET
- ☐ 13366 STD SPRAY VALVE, NO WALL BRACKET
- ☒ 13382 ULT SPRAY VALVE w/WALL BRACKET
- ☐ 13374 ULT SPRAY VALVE. NO WALL BRACKET

OPTIONS OR MODIFICATIONS:

- ☐ SUPPLY LINES (24" OR 36") CIRCLE LENGTH
- ☐ ADD-ON FAUCET (6",8",10",12",14",16") CIRCLE LGTH
- ☒ IN-LINE DUAL CHECK VALVE
- ☐ BRUSH
- ☒ ELBOWS
- ☐ VANDAL RESISTANT KIT
- ☐ HANDLES (CROSS OR WRIST) CIRCLE STYLE
- ☐ OTHER

### FEATURES:

CONTROL VALVE

- \* 8" C/C BACKSPLASH MOUNT
- \* INTERNAL SPRING LOADED CHECK VALVES
- \* SWIVELING SEAT DISKS
- \* HOT SIDE STEM - RIGHT HAND
- \* COLD SIDE STEM - LEFT HAND
- \* STAINLESS STEEL SEATS
- \* STAINLESS STEEL SEAT SCREWS
- \* STAINLESS STEEL HANDLE SCREWS
- \* 1/2" SLIP JOINT KIT

HOSE

- \* 36" LENGTH
- \* STAINLESS STEEL END FITTINGS
- \* STAINLESS STEEL EXTERNAL JACKET
- \* 3-PLY FIBER REINFORCED INTERNAL RUBBER HOSE

## IN-LINE VACUUM BREAKER

- \* ATMOSPHERIC VENT
- \* DOUBLE CHECK DESIGN

## ULTRA SPRAY VALVE


- \* SOLID BRASS SHOWER HEAD - NO O- RINGS TO LEAK
- \* BRONZE HANDLE - NOT PLASTIC - MEANS FULL "ON"
- \* KNIFE SPRAY PATTERN

WALL BRACKET


- \* ADJUSTS FROM 2" TO 12"

## SYSTEM LIMITS

- \* 1.60 GPM AT 60 PSI
- \* TEMP: 40°F MIN. TO 140°F MAX.
- \* PRESSURE: 200 PSI MAX. STATIC
- \* SHIPPING WEIGHT: 15 LBS

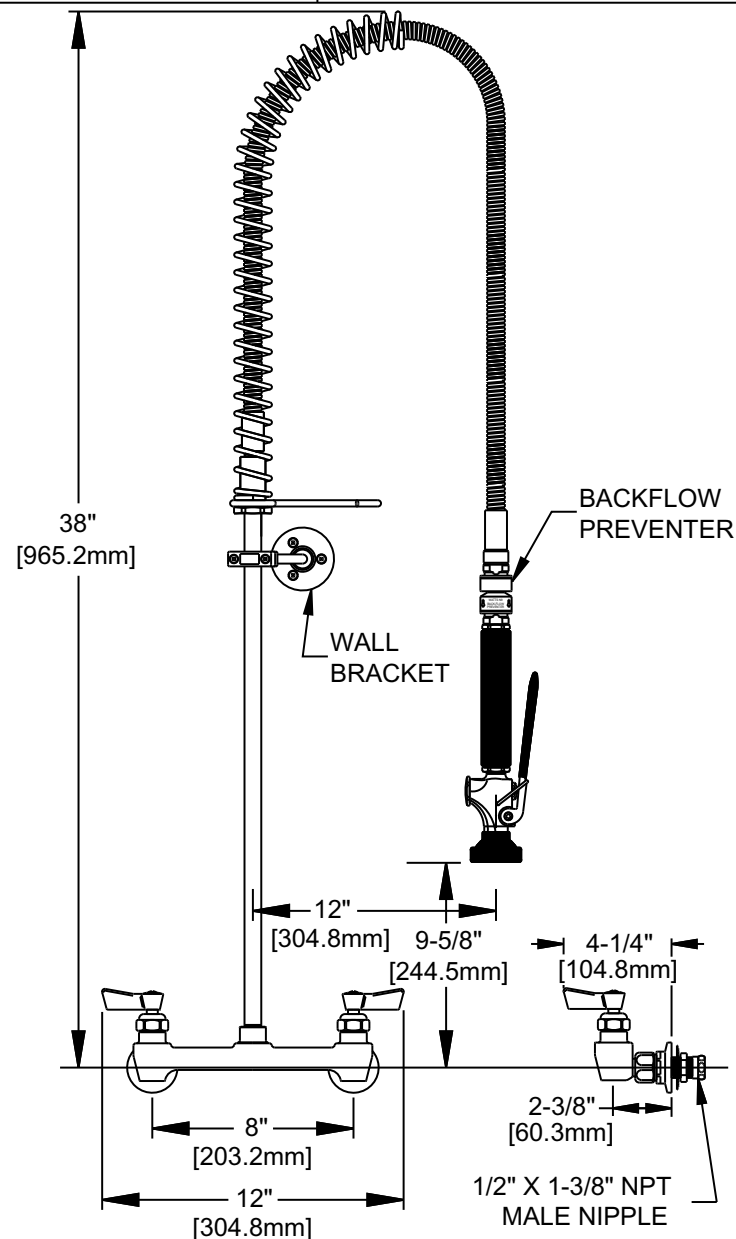

ROUGH-IN:

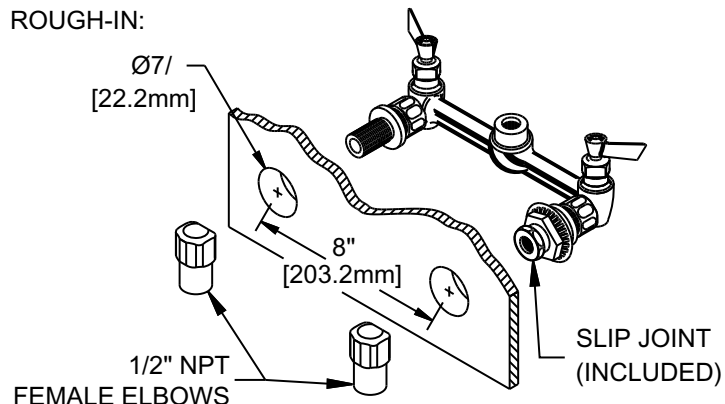

ANSI/A112.18.1M

**FISHER**

FISHER MANUFACTURING COMPANY  
TOLL FREE: 800-421-6162 - FAX: 800-832-8238  
information@fisher-mfg.com - www.fisher-mfg.com