

APPLICATION:

PRODUCT NAME:

**PRE-RINSE SPRING 8" C/C BACKSPLASH
WITH WALL BRACKET & ADD-ON FAUCET**

JOB NAME:

■ 99643 SPECIAL CONFIGURATION

QUANTITY:

ITEM NO.:

MODEL:

- ☐ 34436 WITH 6" SWING SPOUT
☐ 34444 WITH 8" SWING SPOUT
☐ 34452 WITH 10" SWING SPOUT
☒ 34460 WITH 12" SWING SPOUT
☐ 34479 WITH 14" SWING SPOUT
☐ 34487 WITH 16" SWING SPOUT

OPTIONS OR MODIFICATIONS:

- ☐ SUPPLY LINES (24" OR 36") CIRCLE LENGTH
☒ IN-LINE DUAL CHECK VALVE
☐ BRUSH
☐ VANDAL RESISTANT KIT
☐ HANDLES (CROSS OR WRIST) CIRCLE STYLE
☒ OTHER 1/2" NPT FEMALE ELBOWS

FEATURES:

MAIN CONTROL VALVE

- * 8" C/C BACKSPLASH
- * INTERNAL SPRING LOADED CHECK VALVES
- * SWIVELING SEAT DISKS
- * HOT SIDE STEM - RIGHT HAND CHECK
- * COLD SIDE STEM - LEFT HAND CHECK
- * STAINLESS STEEL SEATS, SEAT SCREWS AND HANDLE SCREWS

ADD-ON CONTROL VALVE

- * STEM - RIGHT HAND SWIVEL
- * HOT INDEX BUTTON
- * SWIVELLING SEAT DISKS
- * STAINLESS STEEL SEATS, SEAT SCREWS AND HANDLE SCREWS

HOSE

- * 36" LENGTH
- * STAINLESS STEEL END FITTINGS
- * STAINLESS STEEL EXTERNAL JACKET
- * 3-PLY FIBER REINFORCED INTERNAL RUBBER HOSE
- * REPAIRABLE IN FIELD WITH SIMPLE TOOLS

ULTRA SPRAY VALVE


- * 1.6 GPM @ 80 PSI ENERGY EFFICIENT NOZZLE
- * BRONZE HANDLE - NOT PLASTIC - MEANS FULL "ON"
- * FITS ALL BRANDS

WALL BRACKET

- * ADJUSTS FROM 2" TO 12"

SYSTEM LIMITS

- * TEMP: 40°F MIN. TO 140°F MAX. STATIC
- * PRESSURE 200 PSI MAX. STATIC
- * SHIPPING WEIGHT: 15.0 LBS

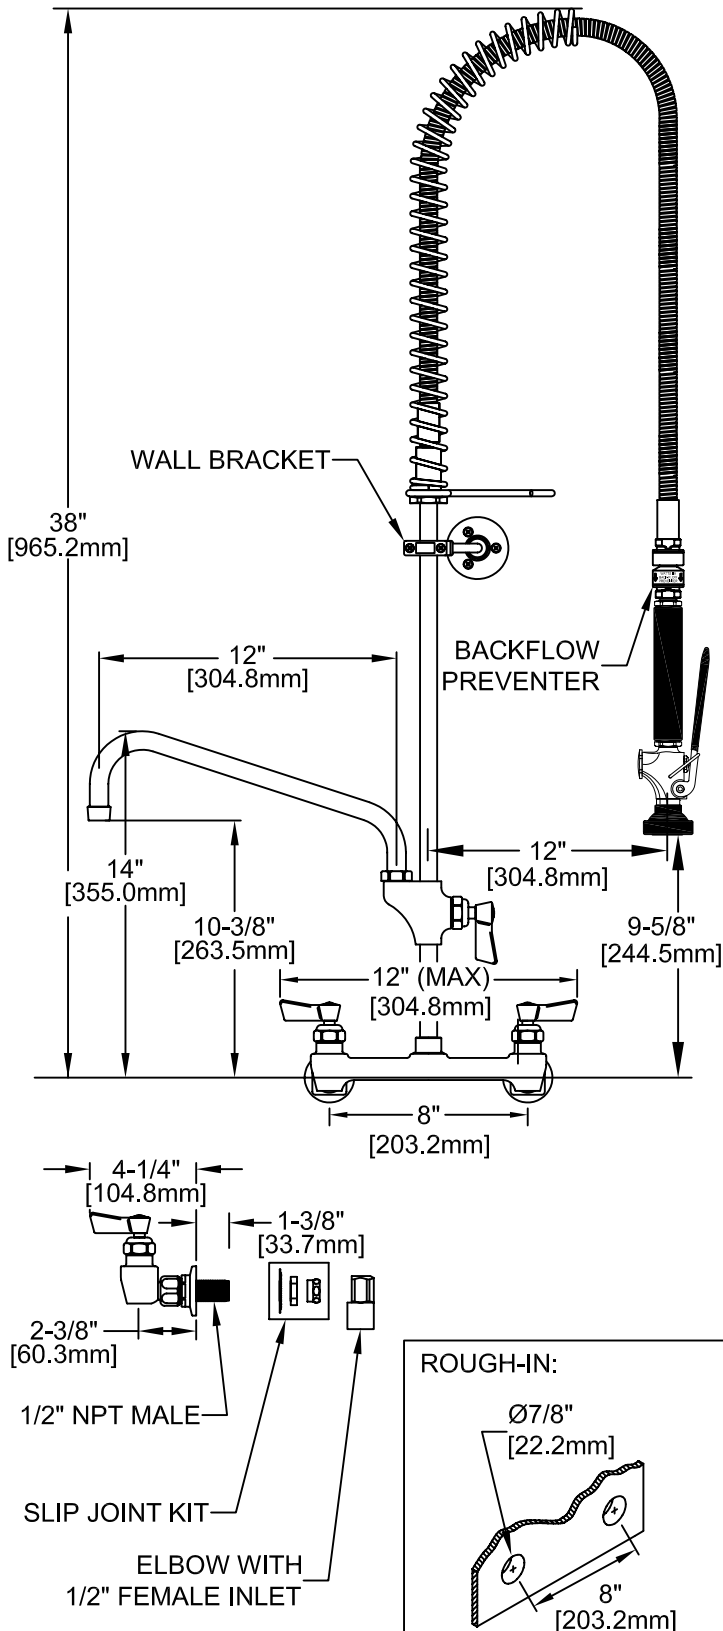

ANSI/A112.18.1M, ANSI/NSF 61.9

FISHER

FISHER MANUFACTURING COMPANY

TOLL FREE: 800-421-6162 - FAX: 800-832-8238

information@fisher-mfg.com - www.fisher-mfg.com