Carbonless water filter system

accessory



Filter system compatibility	Capacity – gal (I)	Item number
Symphony™ ice and water dispensers, Horizon™ and Maestro™ Chewblet® ice machines	high capacity – 15,000 (56,700)	01050442

Replacement cartridge description	Unit	Item number
primary filter	carton of 6	01050434
	single	01050426
pre-filter	carton of 12	00954305
	single	00130211

Features

Includes Agion® silver-based antimicrobial product protection of key water contact components¹

Capacity 15,000 gallon (56,700 liter)

System includes pre-filter, primary filter, pressure gauge and wall mounting bracket

High performance filtration

- filters out parasitic cysts and dirt as small as 0.5 micron in size while retaining the sanitation benefits of residual chlorine in your water supply
- includes Fibredyne™ media featuring Agion antimicrobial product protection to inhibit the growth of biofilm and enhance filter performance
- certified to ANSI/NSF standards 42 and 53

Improves ice machine performance

- reduces the most common water-related ice machine problems to keep ice machines functioning at full capacity
- allows chlorine and chloramines from municipal water supplies to pass through, helping to inhibit bacteria growth and slime
- scale inhibition protects machine from scale damage, reducing energy and service costs
- reduces cysts, preventing water borne diseases
- removes dirt and abrasive particles that can damage ice machine

Space-saving design

- system can be mounted in areas as small as 14.75" (37.5 cm) wide by 21.00" (53.3 cm) high or out of the way below standard 34.00" - 36.00" (86.4 cm - 91.4 cm) counters

Pre-filter system saves money

- economical pre-filter filters out large particles and extends life of primary filter
- systems come with both clear and optional opaque pre-filter bowls

Job		
ltem		




Specification	
W1 Width	14.25" (36.2 cm)
Depth	6.12" (15.54 cm)
H1 Height	18.50" (47.0 cm)
Service clearance	2.50" (6.35 cm) at bottom for cartridge removal
C1 Water inlet	3/4" FNPT (3/8" reducer bushing included with system)
C2 Water outlet	3/8" FNPT
C3 Pre-filter	10 micron capable
C4 Primary filter	0.5 micron capable
C5 Flushing valve	
Capacity	15,000 gal (56,700 l)
Flow rate	2.0 gpm (7.57 lpm)
Water temperature	40 - 90 F (5 - 32 C)
Water pressure	10 - 125 psi (69 - 860 kpa)
NSF International standard no. 42 NOTE: Contact Follett to obtain confirmation of the specific model numbers covered by this certification	Mechanical filtration: nominal particulate reduction, class I
NSF International standard no. 53 NOTE: Contact Follett to obtain confirmation of the specific model numbers covered by this certification	Health effects – Mechanical filtration: Cyst reduction n

NOTE: For indoor use only. Check for compliance with state and local laws and regulations. Do not use any filtration system where the water is microbiologically unsafe or with water of unknown quality without adequate disinfection before or after the unit. May be used with disinfected water where filterable cysts may be present.

15 lb (7 kg)

Dimensional drawing

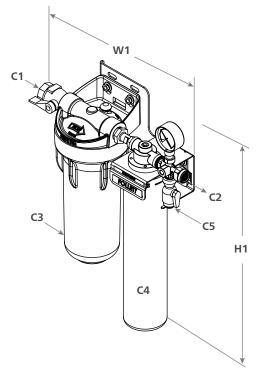

Agion is a registered trademark of Sciessent LLC.

1 Disclaimer: Antimicrobial protection is limited to the treated components and does not treat water.

Fibredyne is a trademark of Pentair Filtration Solutions, LLC, Hanover Park, IL, USA Horizon, Maestro and Symphony are trademarks of Follett Corporation.

Chewblet and Follett are registered trademarks of Follett Corporation, registered in the US. Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.





Approximate ship weight