



Water chiller kit

for use with 7/15 Series ice and water dispensers

| Water chiller kit | |
|-------------------|-----------------|
| V/Hz/Ph | Item number |
| 115/60/1 | 01091602 |

Features

Cabinet

- compact, undercounter design
- fits inside 7/15 Series base stand (item# 00956292)
- corrosion resistant polymer coated steel

Cold water tank

- 0.5 gallon hygienic stainless steel
- external refrigerant evaporator, mechanically wrapped around tank
- 1.3 gph chilled water capacity

Cold water thermostat

- factory set for optimal performance with Follett® 7/15 Series ice and water dispensers
- adjustable thermostat 35.6 F (2 C) to 53.6 F (12 C)

Note: Follett recommends operating temperatures between 45 F (7 C) and 53 F (11.6 C) for best performance

Refrigeration unit

- convection cooled condenser, hermetically sealed compressor
- automatic overload protection
- no lubrication required

Electrical

- 115V/60 Hz provided with 7' NEMA 5-15 power cord

Installation

- chiller includes all tubing, hardware, and instructions required for simple connection to Follett 7/15 Series ice and water dispensers

Quality

- UL listed
- warranty – two-year parts only

Packing

- individual shipping carton

Refrigerant type

- R134a

Job



Item

Specification

| | |
|---------------------------------|---|
| W1 Width | 16.14" (41.0 cm) |
| D1 Depth | 8.31" (21.1 cm) |
| H1 Height | 11.06" (28.1 cm) |
| Ventilation clearance | air-cooled models only – 3.00" (7.62 cm) all sides |
| Utility connection location | top |
| C1 115 V/60/1 electrical | provided with 7' NEMA 5-15 power cord |
| C2 Water inlet | 1/4" OD |
| C3 Water outlet | 1/4" OD |
| Ambient temperature range | 40 - 90 F (4 - 32 C) |
| Water temperature | 45 - 90 F (7 - 32 C) |
| Water pressure | 10 - 70 psi (69 - 483 kpa) |
| Approximate ship weight | 31 lb (14 kg) |

NOTE: For indoor use only

Dimensional drawing

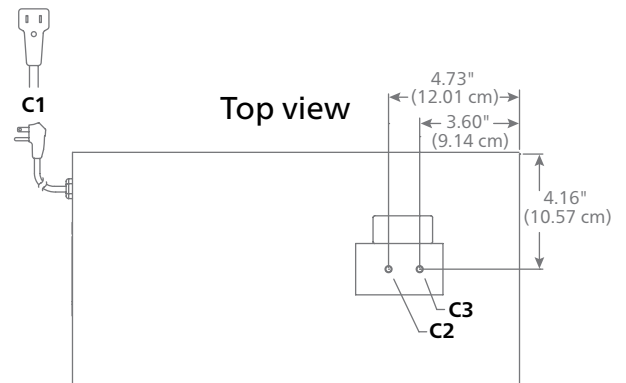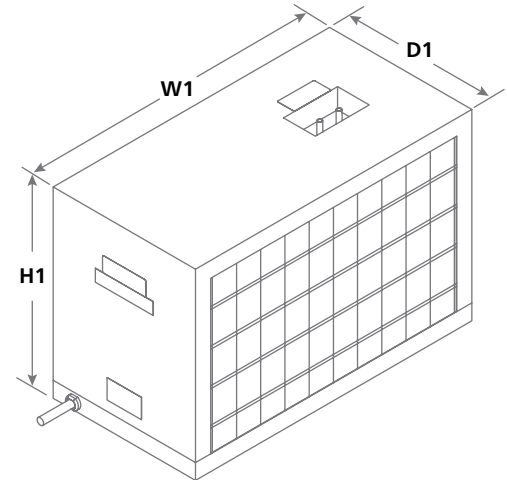

7/15 Series dispenser chiller kit