

BOWL CUTTERS

OPTIONAL

- Optional slow knife mixing

speed in 2 directions.

- Extracting arm with

to unload to a trolley

motorized disc



SPECIFICATIONS

Model
Bowl Volume
Mixture Bowl Capacity
(approx.)
Knife Horsepower
Knife Speed
Bowl Horsepower
Bowl Speed
Electrical
Weight
Packaging Weight
Dimensions (DWH)
Packaging Dimensions
Item #

Front lid

K80
80 L / 21 gal
65 kg./143.3 lbs.
14.3/20.4HP
2200/4300 RPM
2/3.4 HP
11/21 RPM
220V/60/3
2425 lbs.
2860 lbs.
57" x 82.3" x 50"
96" x 66" x 60"
10880

MODEL K80

Bowl cutting produces as much as 15% higher finished product yield. Bowl cutting also allows the use of up to 30% more water and results in less shrinkage.

STANDARD

- 2 independent motors
- (bracket knife and bowl).
- Two 2 speed motors
- 6 knife head and compensating rings to use for 3 -knife head.
- Anti-noise lid
- All stainless steel
- Water resistant switchboard




Optional slow knife mixing speed in 2 directions.

DIMENSIONS

Standard removable 6 and 3-knife head.

Optional motorized unloader

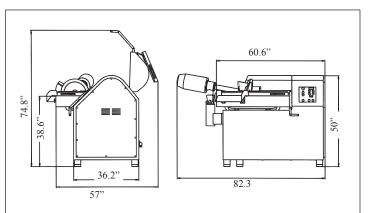

Mississauga, Ontario, Canada Tel: (905) 828-0234 Toll-Free: 1-800-465-0234 Fax: (905) 607-0234 Email: sales@omcan.com www.omcan.com