



PROJECT:	MODEL:	QUANTITY:	ITEM NO:
----------	--------	-----------	----------

# ENCLOSED TRANSPORT CABINETS

## Insulated Utility Transport for 18" x 26" Trays

"ETC-1826 INS SERIES"

**NO HEAT**

**INSULATED**



ETC-1826-7 INS



ETC-1826-16 INS

- Non-Heated (Ambient)
- Insulated
- 18" x 26" Tray Rack, Fixed Spacings



ETC-1826-7INS Tray Rack  
with 3" Fixed Spacings  
(One side of a pair)

**FWE's all stainless steel transport is built tough for all purpose transport and storage. Fully insulated for hot or cold transport.**



FWE's heavy-duty single door tray cabinet is fully enclosed and designed for fast tray access. Built for mobility, FWE's unibody construction keeps the cabinet balanced and stable during transport. One piece rack and upright assembly make it easy and sturdy to transport 18" x 26" trays.

FWE transport cabinets are fully insulated, including the bottom floor base of the cabinet - not just the door, as in some competitive models.

Our internal frame construction is designed to endure the most rigorous operations and environments, eliminating cabinet torquing during transport, assuring FWE cabinets last longer than any other - *period!*

Durable stainless steel takes the abuse of transport applications and allows for sanitary maintenance. Casters are mounted to reinforcement plates for added durability and take the impact over thresholds. Built tough from stainless steel for continuous demanding use, FWE is the "Choice of Professionals".



- ◇ All stainless steel
- ◇ All welded construction - no rivets
- ◇ Tubular stainless steel welded base frame
- ◇ Heavy-duty polyurethane casters
- ◇ Heavy-duty hinges
- ◇ Positive close door latch
- ◇ Hi-temp door gasket
- ◇ Recessed hand grips
- ◇ Fully insulated
- ◇ Removable tray rack assembly at fixed 3" spacings
- ◇ Two year limited warranty

PROJECT:	MODEL:	QUANTITY:	ITEM NO:
----------	--------	-----------	----------

# SPECIFICATIONS: ENCLOSED TRANSPORT CABINETS

**NO HEAT**

**INSULATED**

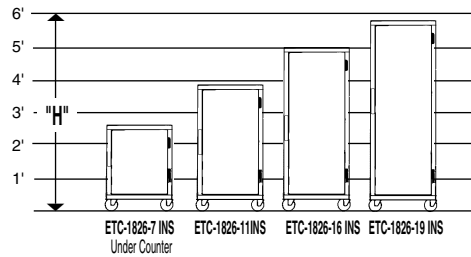

MODEL NUMBER	CAPACITIES 3" FIXED SPACING TRAY / PAN CAPACITY	OVERALL EXTERIOR DIMENSIONS IN. (mm)			Consult Factory for SHIPPING CLASS		
		HIGH "H"	DEEP "D"	WIDE "W"	NO. OF DOORS	CASTER SIZE	SHIP WT. LBS. (KG)
<b>Insulated Utility Transport Cabinets</b>							
ETC-1826-7 INS Under Counter	7 - 18" x 26" trays / pans	34.75" (883)	32.5" (826)	23.5" (597)	1	5"	150 (68)
ETC-1826-11 INS	11 - 18" x 26" trays / pans	45" (1143)	32.5" (826)	23.5" (597)	1	5"	185 (84)
ETC-1826-16 INS †	16 - 18" x 26" trays / pans	61.75" (1568)	32.5" (826)	23.5" (597)	1	5"	235 (106)
ETC-1826-19 INS †	19 - 18" x 26" trays / pans	70.5" (1790)	32.5" (826)	23.5" (597)	1	5"	265 (120)

† **Dutch Doors** are available on the full-size models. Add "D" for the **Dutch Door** optional accessory. **Dutch Door** models have 2 half size doors.  
All model sizes are available with the **Pass-thru Door** [add "P"] and/or See-thru **Lexan Door** [add "L"] optional accessories.

**CONSTRUCTION.** Heliarc welded, single unit construction of stainless steel; 20-gauge polished exterior, 22-gauge stainless steel interior with easy-to-clean covered corners. Welded tubular stainless steel base frame with extra-heavy tubing. 10-gauge stainless steel reinforcing plates at corners and fittings.  
**INSULATION.** "Ultra-Guard" UG-26 high density fiberglass insulation throughout; top, back, bottom, sides, and door(s).  
**DOORS AND LATCHES.** Flush mounted, stainless steel insulated doors. High temperature gasket sealed; gasket shall be cabinet mounted. Each door shall have two (2) heavy-duty edgемount die cast hinges. Door latch shall be edgемounted, full grip, and positive closing. The hinge and latch mountings are reinforced with stainless steel backing plates.

**HANDLES.** Full-size, form-fitting recessed hand grips shall be mounted on each side of cabinet.  
**CASTERS.** Maintenance free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake. Casters shall have a reinforced yoke mounted to 10-gauge caster plate. The caster mounting plate shall be secured to a 10-gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.

**TRAY RACK ASSEMBLY.** Unitized tray rack assembly shall be heavy gauge stainless steel, channels fixed in place at 3" spacings. Assemblies are designed to accommodate one (1) 18" x 26" tray. Removable stainless steel uprights shall easily lift off heavy-duty stainless steel supports without the use of tools.

***FWE Products are used by major companies world-wide. We can modify, design, or custom build equipment to fit your special requirements.***

**Optional Accessories:**

- Heat retention battery
- "Convert-a-Unit" for canned fuel use
- Heavy-duty push pull handles
- Dutch doors
- See-thru Lexan door
- Pass-thru door
- Key locking door latch
- Magnetic latch
- Paddle latch
- Padlocking transport latch
- Left hand door hinging
- Security packages
- All swivel or larger casters
- Door edge trim
- Full extension bumper
- Corner bumpers
- Cold plate cartridge
- Floorlock (requires 6" casters)
- Adjustable tray slide assembly



**Food Warming Equipment Company, Inc.**

P. O. Box 1001  
Crystal Lake, IL 60039 USA  
800-222-4393; 815-459-7500  
Fax: 815-459-7989

Manufacturing Facilities:  
7900 S. Route 31  
Crystal Lake, IL 60014 USA  
www.FWE.com sales@fweco.net

FWE products may be covered under one or more of the following U.S. patents: 288,299;238,300;3,952,609;4,192,991.  
All specifications subject to change without notice.  
© 10 Food Warming Equipment Company, Inc.