



PROJECT:	MODEL:	QUANTITY:	ITEM NO:
----------	--------	-----------	----------

ENCLOSED TRANSPORT CABINETS

Utility Transport for 18" x 26" Trays

"ETC-1826 SERIES"

NO HEAT

NON-INSULATED



ETC-1826-7



ETC-1826-16

- Non-Heated (Ambient)
- Non-Insulated
- 18" x 26" Tray Rack, Fixed Spacings



ETC-1826-7 Tray Rack with 3" Fixed Spacings
(One side of a pair)

FWE's non-insulated all stainless steel transport is built tough for all purpose transport and storage.



FWE's heavy-duty single door tray cabinet is fully enclosed and designed for fast tray access. Built for mobility, FWE's unibody construction keeps the cabinet balanced and stable during transport. One piece rack and upright assembly make it easy and sturdy to transport 18" x 26" trays.

Our internal frame construction is designed to endure the most rigorous operations and environments, eliminating cabinet torquing during transport, assuring FWE cabinets last longer than any other – *period!*

Durable stainless steel takes the abuse of transport applications and allows for sanitary maintenance. Casters are mounted to reinforcement plates for added durability and take the impact over thresholds. Built tough from stainless steel for continuous demanding use, FWE is the "Choice of Professionals".

- ◇ All stainless steel
- ◇ All welded construction - no rivets
- ◇ Tubular stainless steel welded base frame
- ◇ Heavy-duty polyurethane casters
- ◇ Heavy-duty hinges
- ◇ Positive close door latch
- ◇ Hi-temp door gasket
- ◇ Recessed hand grips
- ◇ Insulated door
- ◇ Removable tray rack assembly at fixed 3" spacings
- ◇ Two year limited warranty

PROJECT:


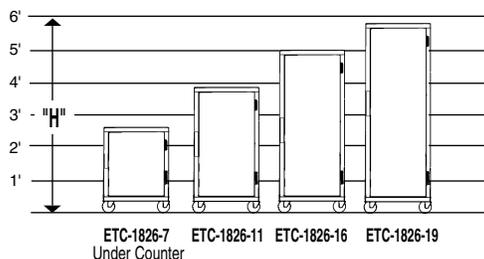
MODEL:

QUANTITY:

ITEM NO:

SPECIFICATIONS:

ENCLOSED TRANSPORT CABINETS

NO HEAT**NON-INSULATED**

DOOR SWING: 20°

MODEL NUMBER	CAPACITIES 3" FIXED SPACING TRAY / PAN CAPACITY	OVERALL EXTERIOR DIMENSIONS IN. (mm)			Consult Factory for SHIPPING CLASS		
		HIGH "H"	DEEP "D"	WIDE "W"	NO. OF DOORS	CASTER SIZE	SHIP WT. LBS. (KG)
Non-Insulated Utility Transport Cabinets							
ETC-1826-7 Under Counter	7 - 18" x 26" trays / pans	33.5" (851)	30.25" (768)	22" (559)	1	5"	140 (63)
ETC-1826-11	11 - 18" x 26" trays / pans	44.5" (1130)	30.25" (768)	22" (559)	1	5"	170 (77)
ETC-1826-16 †	16 - 18" x 26" trays / pans	60.5" (1537)	30.25" (768)	22" (559)	1	5"	210 (95)
ETC-1826-19 †	19 - 18" x 26" trays / pans	69.25" (1759)	30.25" (768)	22" (559)	1	5"	240 (108)

† **Dutch Doors** are available on the full-size models. Add "D" for the **Dutch Door** optional accessory. **Dutch Door** models have 2 half size doors.

All model sizes are available with See-thru **Lexan Door** [add "L"] optional accessory.

CONSTRUCTION. Heliarc welded, single unit construction of 18-gauge stainless steel; Welded tubular base frame shall be 1" square, heavy gauge stainless steel tubing, with 10-gauge stainless steel reinforcing plates at corners and fittings.

DOORS AND LATCHES. Flush mounted, stainless steel insulated doors. High temperature gasket sealed; gasket shall be cabinet mounted. Each door shall have two (2) heavy-duty edgemount die cast hinges. Door latch shall be edgemounted, full grip, and positive closing. The hinge and latch mountings are reinforced with stainless steel backing plates.

HANDLES. Full-size, form-fitting recessed hand grips shall be mounted on each side of cabinet.

CASTERS. Maintenance free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake. Casters shall have a reinforced yoke mounted to 10-gauge caster plate. The caster mounting plate shall be secured to a 10-gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.

TRAY RACK ASSEMBLY. Unitized tray rack assembly shall be heavy gauge stainless steel, channels fixed in place at 3" spacings. Assemblies are designed to accommodate one (1) 18" x 26" tray. Removable stainless steel uprights shall easily lift off heavy-duty stainless steel supports without the use of tools.

FWE Products are used by major companies world-wide. We can modify, design, or custom build equipment to fit your special requirements.

Optional Accessories:

- Heat retention battery
- "Convert-a-Unit" for canned fuel use
- Heavy-duty push pull handles
- Dutch doors
- See-thru Lexan door
- Key locking door latch
- Magnetic latch
- Paddle latch
- Padlocking transport latch
- Left hand door hinging
- Security packages
- All swivel or larger casters
- Door edge trim
- Full extension bumper
- Corner bumpers
- Cold plate cartridge
- Floorlock (requires 6" casters)
- Custom tray slide spacings



Food Warming Equipment Company, Inc.

P. O. Box 1001
Crystal Lake, IL 60039 USA
800-222-4393; 815-459-7500
Fax: 815-459-7989

Manufacturing Facilities:
7900 S. Route 31
Crystal Lake, IL 60014 USA
www.FWE.com sales@fweco.net

FWE products may be covered under one or more of the following U.S. patents: 288,299;238,300;3,952,609;4,192,991.

All specifications subject to change without notice.
© 07D Food Warming Equipment Company, Inc.