



# Performance Features:

## Ultra-Universal Heated Holding

Recessed tri-directional cord pocket allows for compact fit.



HLC-2127-9-9  
Stainless Steel Rack

Easy to use up-front controls are recessed protected.

Stainless Steel Rack accommodates 12" x 20" Pans, GN1/1 Pans, and GN 2/1 Pans at 1.5" (38mm) spacings.

Full grip magnetic handle is easy to open with full hands.

Radiant Heat System keeps foods oven-fresh and prevents product dehydration or shrinkage with two (2) individual compartments, each with separate heat controls.

Six (6) shelves are included. Shelves are adjustable and removable allowing for banquet plates, 18" x 26" sheet trays, baker's pans, or versatile shapes and sizes of trays and pans.

*2 Separately Controlled  
Compartments  
Allows Versatile Use*



# Performance Features:



*Standard Feature:*  
**Cord Pocket** allows for multi-directional use.

*Optional Accessory:*  
**Cord Winding Brackets** keep cord out-of-the-way during transport or storage.

*Optional Accessory:*  
**Rear Handle** allows for full control of unit when navigating through narrow hallways or doorways. Heavy-duty handle allows for full and comfortable grip.

*Optional Accessory:*  
Full length integral **Work Flow Handle** is easy to grip at any point along door.

*Optional Accessory:*  
Change directions easily with **All Swivel Casters**, allowing for full cabinet rotation and tight turns on various surfaces.

**Rear View**  
Shown With Cord Winding Bracket, Rear Handle, and All Swivel Casters  
Optional Accessories



**HLC-2127-9**  
Shown With Lexan Door and Work Flow Handle  
Optional Accessories



**HLC-2127-6**  
Shown With Door Vent  
Optional Accessory

## STANDARD PRODUCT SPECIFICATIONS:

**CONSTRUCTION.** Heliarc welded, single unit construction of stainless steel; 20-gauge polished exterior, 22-gauge stainless steel interior with easy-to-clean coved corners. Welded tubular base frame.

**INSULATION.** "Ultra-Guard" UG-26 high density fiberglass insulation throughout; top, back, bottom, sides and door(s).

**DOORS AND LATCHES.** Flush mounted, double pan, stainless steel doors shall have 1" thick fiberglass insulation. High temperature door gasket mounted on cabinet. Door latch shall be edgmounted, full grip, and positive closing. Each door shall have two (2) heavy-duty edgmounted die cast hinges.

**CASTER MODELS.** Maintenance free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake. Casters shall have a reinforced yoke mounted to 10-gauge caster plate. The caster mounting plate shall be secured to a 10-gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.

**STAINLESS STEEL RACK.** Cabinet rack accommodates 12" x 20" Pans, GN1/1 Pans, and GN 2/1 Pans at 1.5" (38mm) fixed spacings. Rack is removable and shall easily lift off heavy-duty stainless steel brackets without the use of tools for cleaning.

**SHELVES.** Three (3) shelves are included per compartment. Shelves are triple plated, welded rod-type. Shelves adjustable and removable allowing for banquet plates, 18" x 26" sheet trays, baker's pans, or versatile shapes and sizes of trays and pans.

**HEATING SYSTEM/CONTROLS.** Radiant heat system shall include an Incoloy nickel-chromium alloy heating element. Controls shall be up-front, recessed and shall include a full range adjustable thermostat. Thermostat shall include temperature scale marked in ten degree increments (F/C) from 90°F to 190°F (30° to 90°C). An operational range thermometer, power supply light and thermostat cycling light are also included.


**ELECTRICAL CHARACTERISTICS.** 3 wire grounded 10 foot extension power cord and plug, rear mounted for safety. See electrical data chart for amperage and receptacle configuration. Dedicated circuit.

## Optional Accessories:

- Work flow handle
- 220 volt, 50/60 Hz, single phase
- CE compliant
- See-thru Lexan door
- Pass-thru door
- Key locking door latch
- Magnetic latch
- Padlocking transport latch
- Door vents
- Left hand door hinging
- Lift-off door hinges
- Hinged 270° door swing
- Security packages
- All swivel or larger casters
- Door edge trim
- Menu card holder
- Push-pull bar
- Tubular handles
- Cord winding bracket
- Stainless steel lift handles
- Full extension bumper
- Corner bumpers
- 6" floor legs
- Shelves
- Custom fixed spacings

# Specifications:

PROJECT:	MODEL:	QUANTITY:	ITEM NO:
----------	--------	-----------	----------

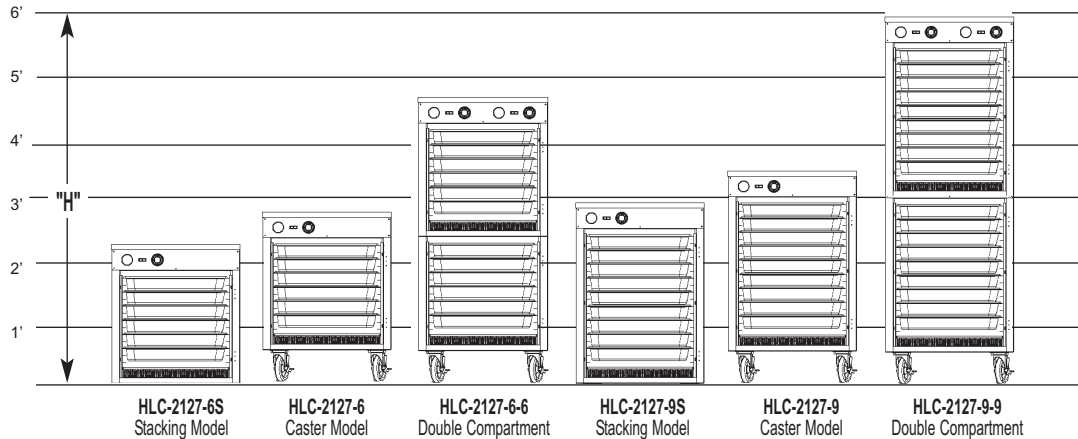

STANDARD ELECTRICAL DATA			
	COMPARTMENTS		OPTIONAL
	SINGLE	DOUBLE	
VOLTS	120	120	120
WATTS	1000	2000	1400
AMPS	8.3	16.6	11.6
HERTZ	50/60	50/60	50/60
PHASE	Single	Single	Single
NEMA PLUG	5-15P	5-20P	5-15P

Dedicated circuit.

OPTIONAL ELECTRICAL DATA						
	COMPARTMENTS		OPTIONAL	COMPARTMENTS		OPTIONAL
	SINGLE	DOUBLE		SINGLE	DOUBLE	
VOLTS	208	208	208	240	240	240
WATTS	890	1780	1246	1190	2380	1666
AMPS	4.3	8.6	6	5	9.9	6.9
HERTZ	50/60	50/60	50/60	50/60	50/60	50/60
PHASE	Single	Single	Single	Single	Single	Single
NEMA PLUG	6-15P	6-15P	6-15P	6-15P	6-15P	6-15P

Dedicated circuit.

MODEL NUMBER	CAPACITIES:										OVERALL EXTERIOR DIMENSIONS IN. (mm)			CLASS 100				
	Wire Rack Fixed Spacings @ 1.37"										PRODUCT CAPACITY LBS. (KG)	HIGH "H"	DEEP "D"	WIDE "W"	NO. OF DOORS	CASTER SIZE	SHIP WT. LBS. (KG)	CUBIC FEET (m3)
	DEPTH 12" x 20" PANS		DEPTH GN 1/1 PANS			21" x 27" Shelf (A) (Standard)	18" x 26" ON SHELF	Maximum Shelf Capacity*	18" x 26" ON SHELF									
HLC-2127-6S Stacking Model	12	6	4	12	6	4	3	(3)	5	(5)	100 lbs (45)	28.75" (730)	32" (813)	26.5" (673)	1	NO CASTERS	185 (83)	13.8 (.39)
HLC-2127-6 Caster Model	12	6	4	12	6	4	3	(3)	5	(5)	100 lbs (45)	34" (864)	32" (813)	26.5" (673)	1	5"	200 (91)	16 (.45)
HLC-2127-6-6 Double Compartment Split Cavity	24	12	8	24	12	8	6 TOTAL	(6)	10 TOTAL	(10)	200 lbs (90)	56" (1422)	32" (813)	26.5" (673)	2	5"	250 (114)	22 (.62)
HLC-2127-9S Stacking Model	18	12	8	18	12	8	3	(3)	19	(19)	180 lbs (82)	37" (940)	32" (813)	26.5" (673)	1	NO CASTERS	180 (82)	16 (.45)
HLC-2127-9 Caster Model	18	12	8	18	12	8	3	(3)	19	(19)	180 lbs (82)	42" (1067)	32" (813)	26.5" (673)	1	5"	191 (87)	19 (.53)
HLC-2127-9-9 Double Compartment Split Cavity	36	24	16	36	24	16	6 TOTAL	(6)	38 TOTAL	(38)	360 lbs (164)	73.5" (1867)	32" (813)	26.5" (673)	2	5"	360 (162)	33 (.93)

All rights reserved. All specifications subject to change without notice. Errors subject to correction. © 11 Food Warming Equipment Company, Inc.