

# Performance Features:

### Hold, Transport & Serve all from one unit



Independently electronic controlled compartments

Lift-off door hinges

Recessed tubular handle on both sides

Heavy-duty paddle latch is easy to grip with full hands

Fully insulated to retain temperature and isolate compartments

Full perimeter bumper with non-marking replaceable vinyl cushion

6-Caster configuration allows for tight turns and maneuvers easily


**UHRS-8-8** 



## Hold, Transport & Serve

For 18" x 26" Trays • 12" x 20" Pans • GN Pans

## **Specifications:**

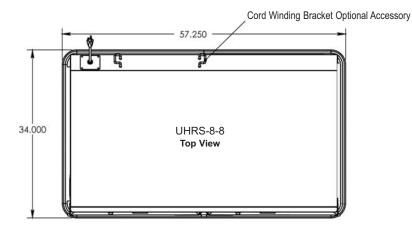

#### Adjustable Universal Tray Slides **Each Set of Tray Slides Holds:**

- 18" x 26" Trays
- 12" x 20" x 2.5" Pans
- GN 2/1-65mm Pans
- GN 1/1-65mm Pans


Spacings @ 4.5" (114mm)

#### **Dimensions:**


Height: 65" (1651mm) Depth: 34" (863mm) Width: 57.25" (1454mm)

#### **Electrical Data:**

Volts: 120 Watts: 1610 Amps: 13.4 Hertz: 50 / 60 Phase: Single NEMA Plug: 5-20P

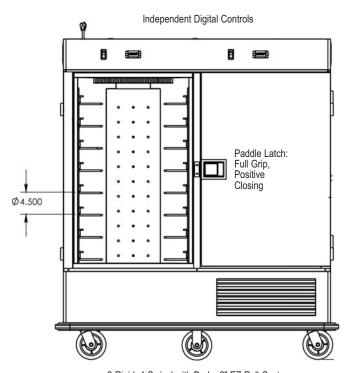

2-Rigid, 4-Swivel with Brake 6" EZ Roll Casters UHRS-8-8 Front View

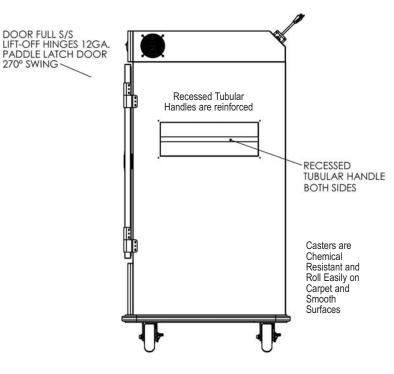

UHRS-8-8 Side View

All rights reserved. All specifications subject to change without notice. Errors subject to correction. © 14 Food Warming Equipment Company. Inc.

270° SWING