

Models:

36ES21

36 E Series Heavy Duty Range Match Fryer

Item: 36ES21	
Quantity:	
Project:	
Approval:	
Date:	

Electric 24" Wide, 70 Pound Capacity Fryer
, a . a a a p a a , , a .



Standard Features:

- Stainless steel front and sides
- 20kW total element package
- 70 Lb. (31 kg) shortening capacity, continuously welded, heavy gauge nickel-plated steel fry tank with 1" (25mm) drain valve is located at the bottom
- · Chrome wire basket
- Electromechanical thermostat with temperature control range of 200°F (93°C) to 375°F (190°C)
- Inconel immersion type fixed heating elements
- 6" (152mm) adjustable chrome plated legs (NSF)
- Storage cabinet with door
- 1 year warranty parts & labor (USA & Canada)

Optional Features:

- Stainless steel main back
- Stainless steel tank cover
- Extra fry tank
- Extra fry tank with 1" drain
 - valve
- ☐ Set of twin baskets
- ☐ Large single basket
- 6" (152mm) adjustable stainless steel legs
- ☐ High voltage 460V
- Set of (4) Polyurethane (nonmarking) swivel casters complete with front brakes
- Marine accessories of hand rails, and deck fasteners

NOTE: Fryers supplied with casters must be installed with an approved restraining device.


Specifications:

Heavy-duty range match fryer, 20 kW with 70 Lb. (31kg) shortening capacity. Heavy gauge, continuously welded nickel-plated fry tank. Utilizes four fixed immersion type inconel elements positioned to provide heat to the sides, back, front and bottom of the frying area. Stainless steel front and sides, mounted on storage cabinet complete with door. Fryers are available with casters or for dais mount.

NOTE: The fryer may be paired together to form a common unit. They may be paired with a frymate model or may be set up as fry-stations of two fryers with a frymate unit between them. These fryers are designed to battery with 36E series heavy-duty ranges.





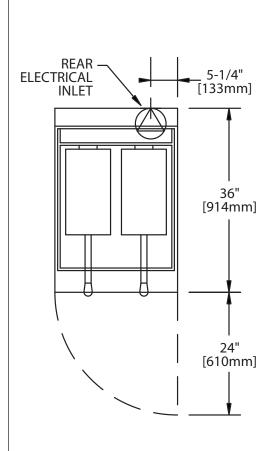

	7-1/2" [191mm]
· O ·	
	30"
	[762mm]
24"	6" [152mm]
24" [610mm]	Ť


Nominal Ampers Per Line												
Model	1	Phas	se				Thre	ree Phase				
Model	80	9	09	208		240			460			
	7	240	46	Х	Υ	Z	Х	Υ	Z	Х	Υ	Z
36ES21	96	85	43	60	44	64	54	39	57	28	20	29

		Three Phase KW per Phase				
Model	Total KW	208, 240, 460				
	KW	X-Y	Y-Z	X-Z		
36ES21	20	4.8	5.6	9.6		

Model	Shipping lı	nformation	
Model	Wt Lbs/Kg	Cu Ft	
36ES21	270/122	34	

Available Voltages: 208 VAC (197-219); 240 VAC (220-240); 460 VAC (440-480). When ordering specify voltage and phase.

Garland products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland will not provide service, warranty, maintenance or support of any kind other than in commercial applications.



Form# 36ES21 (03/26/13)

