



Cuisine Series Heavy Duty Infra-Red Double Broiler

Item: C2100M

Quantity: _____

Project: _____

Approval: _____

Date: _____

Models:

C2100M



Model C2100M w/Optional Casters

Standard Features:

- Stainless steel front, top, and sides
- 6" (152mm), chrome steel adjustable legs
- Four, (4), direct radiant, infra-red, 17,500 BTU, (5.14kW), burners per broiling chamber
- 120V air-intake blower motor
- Easy to clean, removable mesh filter
- Air-proving safety switch, which cuts off gas supply when air-intake blower is not operational, or if the filter is blocked
- 6-foot (1.8m) AC power cord and plug
- Removable broiler grid rack sections; 24" (610mm) wide x 22"(559mm) deep
- 3-position adjustable broiling racks, (opening is 4-1/2"/114mm high with rack in lowest position)

- Large capacity, easily removable grease container for each broiling chamber; located outside of the heat zone
- Two, (2), "High/Medium/Low" independent heat controls for each broiling chamber
- 3/4" rear gas connection w/gas pressure regulator

Optional Features:

- Stainless steel main back
- 6" (152mm) stainless steel adjustable legs, set of (4)
- Set of (4) swivel casters with front (2) locking
- Polyurethane, non-marking swivel casters (4) with front (2) locking
- Adjustable casters (for C2100M only)
- Flanged feet set of (4)
- Gas flex hose w/quick disconnect - 3/4"

Cuisine Series Heavy Duty Infra-Red Double Broiler

Specifications:

Double, over-fired broiler with two infra-red broiler chambers. Four, (4), 17,500 BTU, (5.14kW), direct radiant burners per broiling chamber. Fan-assisted clean air delivery system. Each chamber features a large capacity, easy to remove grease collection pan. Standard with stainless steel front, two independent heat controls, (left and right), for each broiling chamber and 3/4" rear gas connection with pressure regulator. Natural gas or propane.



NOTE: Broilers supplied with casters must be installed with an approved restraining device.




Input Rating				Manifold Operating Pressure				Rear Gas Connection	Electrical Supply
Per Burner		Total		Natural		Propane			
BTU	kW	BTU	kW	"WC	mbar	"WC	mbar	3/4" NPT	120V/60Hz/1Ø 3 Amps
17,500	5.14	140,000	41.12	6	15	11	27.5		

Gas input ratings shown for installations up to 2000 ft., (610m), above sea level. Please specify altitudes over 2000 ft. Please specify gas type when ordering.

Exterior Dimensions			Installation Clearances*		Entry Clearances	
Height	Width	Depth	Sides	Rear	Crated	Uncrated
75-1/8" (1908mm)	34" (864mm)	34" (864mm)	6" (152mm)	6" (152mm)	39-1/4" (997mm)	37" (940mm)

*For installation in non-combustible locations only.

Garland/U.S. Range products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland / U.S. Range will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

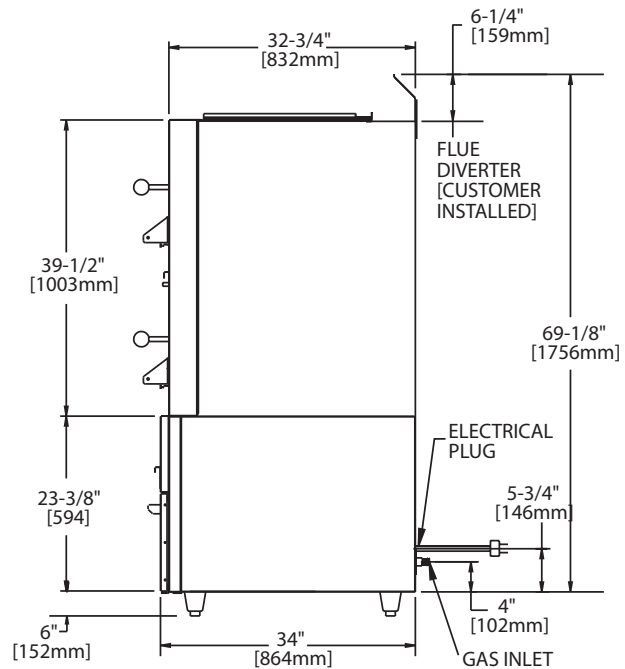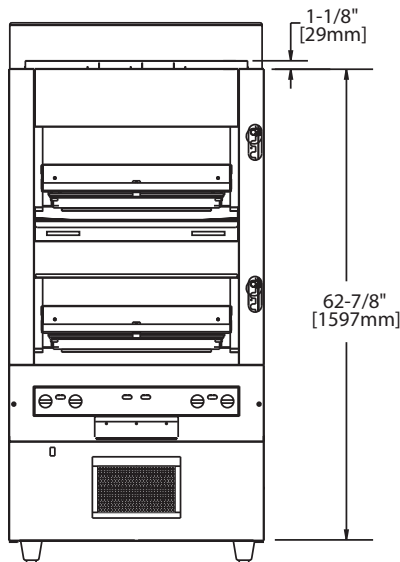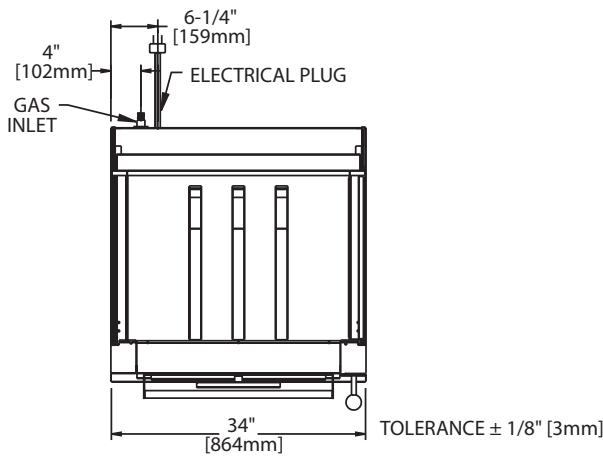

Form# C2100M (08/17/11)