



# Induction Green Heat

## Garland Induction Tabletop Heat Retaining Unit RTCsmp Hold-Line

Item: \_\_\_\_\_  
 Quantity: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Approval: \_\_\_\_\_  
 Date: \_\_\_\_\_

Models:

GI-HO 1500



Induction warm holding system consisting of:

Induction generator with two heat retaining/holding zones.

Equipped with the latest RTCsmp (Realtime Temperature Control System) technology.

### Standard Features

#### 1 Induction generator:

A generator, developed specifically for heat retaining/holding, built in an aluminum enclosure, which includes an integrated air fan.

Fresh air is supplied by the fan, located at the bottom of the unit. The unit is also equipped with an air guiding system that directs the hot air out of the housing.

#### 2 Heat retaining plate:

The heat retaining plate is equipped with the latest RTCsmp sensor technology which enables temperature controls in real-time. The set temperature is displayed via a 7-segment display underneath the ceramic glass. The heat retaining plate includes five (5) temperature sensors per zone.

The unit has two zones that can be controlled at different temperatures.

#### 3 Control unit:

The control switches are located on the bottom sheet of the unit, easy accessible for the user.

The control unit regulates the temperature in an increment of 5°F (1°C) and this from 122-212°F (50 to 100°C). The set temperature and the current temperature are shown via the 7-segment display that is located underneath the ceramic glass.

#### Safety above all:

- RTCsmp electronic temperature control that monitors the state of the induction coil, power board, CPU and the ceramic glass temperature.
- RTCsmp monitors the energy supply.
- **No Pan No Heat – Only if an induction suitable pan is located on the glass that energy will be consumed.**

### Optional Features

- Optional induction ready holding pans are available, please contact your dealer for sizes and prices.



Intertek



Intertek





CE models comply with the latest European Norms: EN 60335-1, EN 60335-2-36, EN 62233 (EMC/EMV)

North American models:

ETL listed in compliance with UL 197, CSA C22.2 No.109, NSF-4  
Complies with FCC part 18, ICES-001



Induction Green Heat  
Garland Induction Tabletop Heat Retaining Unit RTCsmp Hold-Line

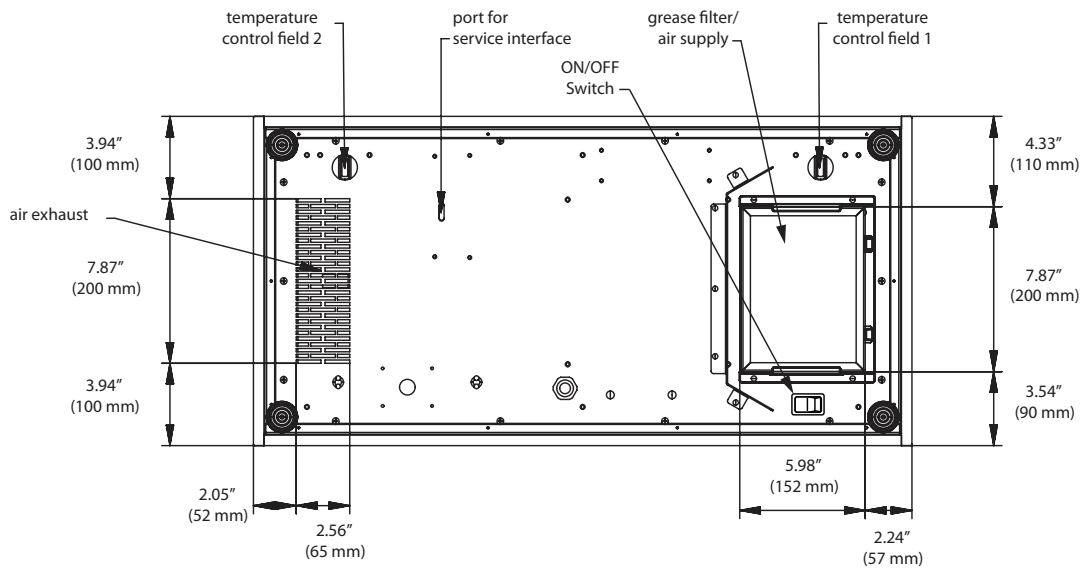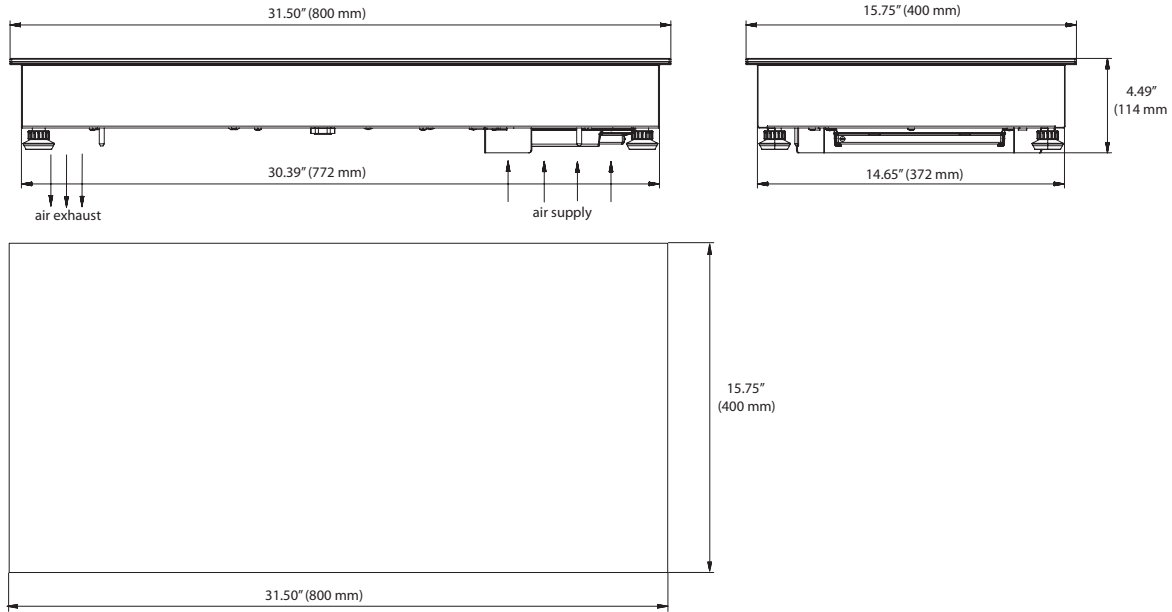

### Technical Data

Generator housing: 31.5"x15.75"x4.5" (800x400x114 mm)  
 Wattage: 120V, 1Ph, 1500W, 12A  
 Quantity of heat retaining zones: 2  
 Power per plate: 750W  
 Ceran glass: 31.5"x15.75"x0.16" (800x400x4 mm)

Garland/U.S. Range products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland / U.S. Range will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

Form# GI-HO 1500 (12/19/13)