




DI-DP12X24

Model Number Key

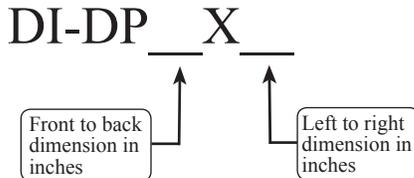

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

## Drop-In Drain Pans


DI-DP12X24, DI-DP12X30, DI-DP12X36,  
DI-DP12X42, DI-DP12X48,  
DI-DP18X24, DI-DP18X30, DI-DP18X36,  
DI-DP18X42, DI-DP18X48

### Standard Features


- All stainless steel construction
- 18 gauge stainless steel pan with removable perforated inserts
- Available in standard widths of 12" or 18" and lengths from 24" to 48". Custom sizes also available
- Drain consists of 1/2" tailpiece that exits from the bottom of the unit
- Drain pan flange includes self-rimming edge for tight fit to work surface
- Installation kit includes: 10' of clear vinyl drain tube, one 4" Ty-wrap, three #10 x 1/2" stainless steel sheet metal screws, three #10 x 1/2" black sheet metal screws, three cable clamps, two 1/2" x 1/2" plastic elbows
- Install by making cut-out in work surface (see details below), apply silicone sealant to underside of drain pan flange, set in place and plumb drain line.

Dimensional Information	Cut-Out Details
-------------------------	-----------------

X = Left to right dimension from 24" to 48", in 6" increments  
Y = Front to back dimension of 12" or 18"

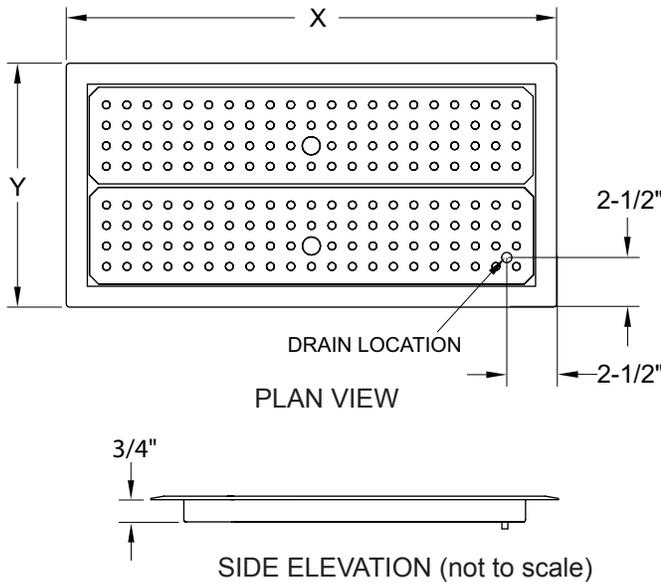

Make cut-out 1-3/4" smaller than the outer flange dimensions. This will leave approximately 1/8" gap between edge of cut-out and the drain pan sides for a snug fit.

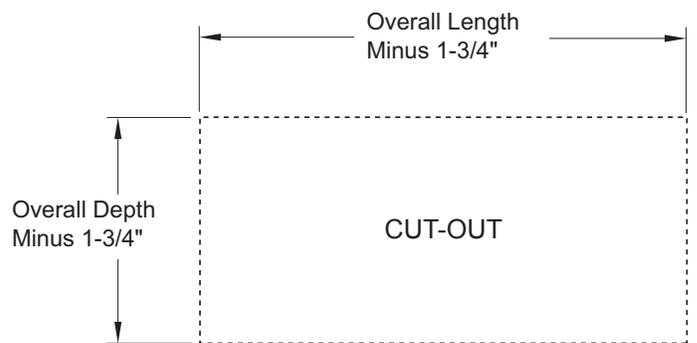

EXAMPLE: A DI-DP12X24 which measures 12" x 24" would require a cut-out size of 10-1/4" x 22-1/4"

<b>Glastender, Inc.</b> • 5400 North Michigan Road • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 <a href="http://www.glastender.com">www.glastender.com</a>	Approval/Notes:
Specifications subject to change without notice. For current specifications please visit our website.	