

	1
c Ustro Us	FRA-24
Intertek Conforms to ANSI/UL STD 471 Certified to CSA STD C22 2 No. 120	

Project:		AIA#
Item #:	Qty:	SIS#
Model #:		

Ice Cream Freezers

FRA-24, FRA-36, FRB-24 or FRB-36

Standard Features

- All stainless steel exterior with 16 gauge galvanized steel floor
- Completely integrated design not just a cabinet with separate drop-in module
- One-piece, seamless top and backsplash
- · Adjustable stainless steel bullet feet
- Foamed-in-place insulation
- 6" diameter seamless welded draining dipper well and faucet
- Six foot grounded cord and plug provided (exits at rear)
- Available sizes to hold one or two 3-gallon containers
- · Leg sockets recessed into base

All faucets are NSF/ANSI 61, Annex G low lead compliant

Specifications

Drains

• 1-1/2" I.P.S. Threaded drain will fit Dearborn part #8033 slipnut and part #W-573P washer.

Faucet

• Accepts 3/8" cold water leads

Capacity

- 24" wide model holds one 3-gallon container
- 36" wide model holds two 3-gallon containers

Electrical

- 120V, 1 phase, 60 Hz, 4.2 full load amps
- Dedicated 15 amp circuit is recommended
- Includes 6 foot grounded cord and plug

Refrigeration

- Operating range -5°F (-20°C) to 10°F (-12°C)
- 1/5 HP, R404A refrigerant

Legs

- 1-5/8" diameter 16 gauge stainless steel
- · Stainless steel bullet feet

Materials

- 20 gauge stainless steel parts include: all components unless otherwise noted
- 22 gauge galvanized steel parts include: wrap on body of freezer unit
- 16 gauge galvanized steel parts include: cabinet floor, condensing unit floor, and leg pads


Glastender, Inc. • 5400 North Michigan Road • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Specifications subject to change without notice. For current specifications please visit our website

Approval/Notes:


Printed in USA Rev. 08-23-13

Dimensional Information

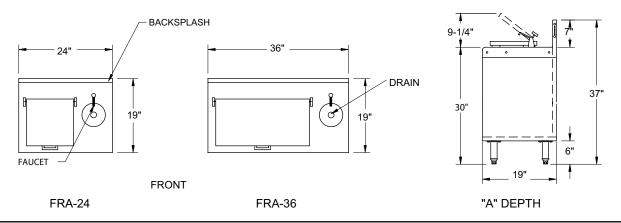


PLAN VIEWS

SIDE ELEVATION

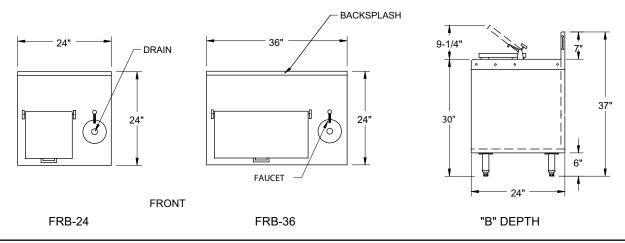

PLAN VIEWS

SIDE ELEVATION

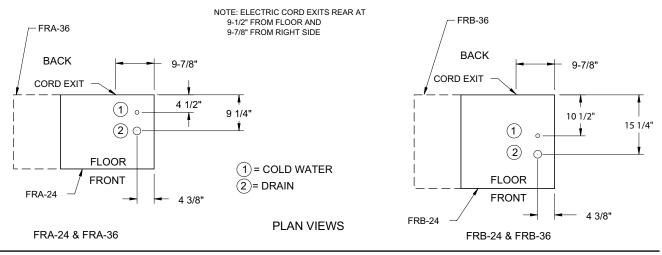

MECHANICALS

