



LC



Intertek

Conforms to ANSI/UL STD 471
Certified to CSA STD
C22.2 No. 120

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Lettuce Crisper

LC

Standard Features

- Self-contained forced air refrigeration system for uniform cooling of product
- Automatic condensate evaporator
- Digital T-STAT control with automatic defrost
- All stainless steel interior construction
- Roto-molded plastic foamed-in-place insulated door and lettuce chute
- Stainless steel exterior construction with galvanized steel back and bottom
- Removable plastic lettuce bin (divider for bin and extra bins available)
- CFC free foamed-in-place insulation
- Removable condenser air inlet filter for easy cleaning
- Lift-up door with plexi-glass window
- Bracket for wall mounting
- 4" adjustable legs available
- Six-foot grounded cord and plug provided

Specifications

Electrical

- 120V, 1 phase, 60 Hz, 5.5 full load amps
- Separate 15 amp circuit is required
- Includes a 6-foot grounded cord
- Available with 220V, 1 phase, 50Hz electrical

Refrigeration

- 1/4 HP, R134a refrigerant

Plumbing

- Automatic condensate evaporator. No drain connection required.

Lettuce Bin

- Removable plastic bin included

Operating Range

- 34°F (1°C) to 40° F (4°C)

Legs (Optional)

- 4" stainless steel legs with adjustable bullet feet

Materials

- 22 gauge stainless steel parts include: interior and exterior front, and sides
- 20 gauge stainless parts include: condensing unit compartment cover
- 22 gauge galvanized steel parts include: back
- 16 gauge galvanized steel parts include: condensing unit floor and exterior bottom
- Roto-molded plastic parts include: lettuce bin, door, and lettuce chute


Glastender, Inc. • 5400 North Michigan Road • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Approval/Notes:

Specifications subject to change without notice. For current specifications please visit our website.




Lettuce Crisper

Dimensional Information

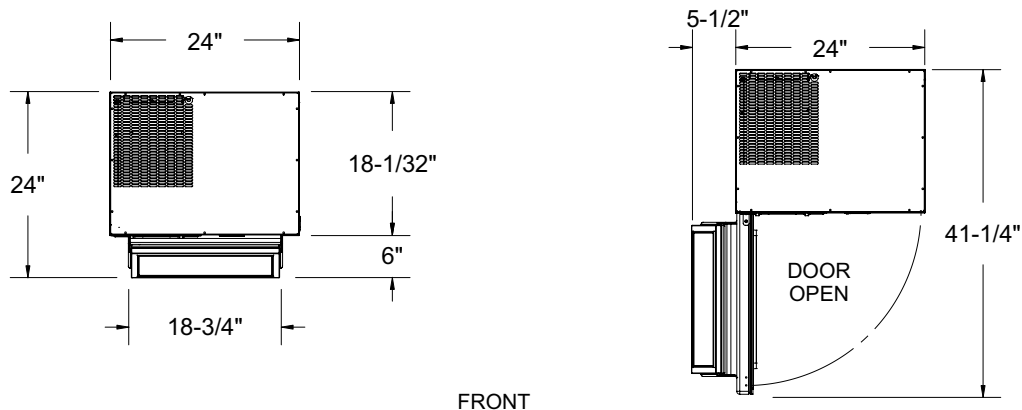


FRONT

PLAN VIEWS

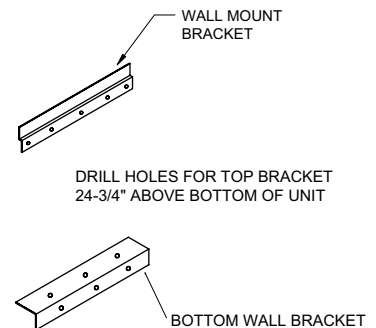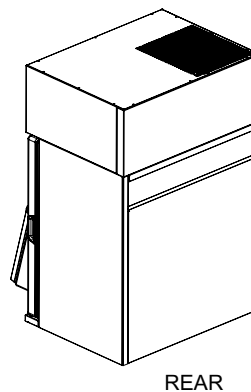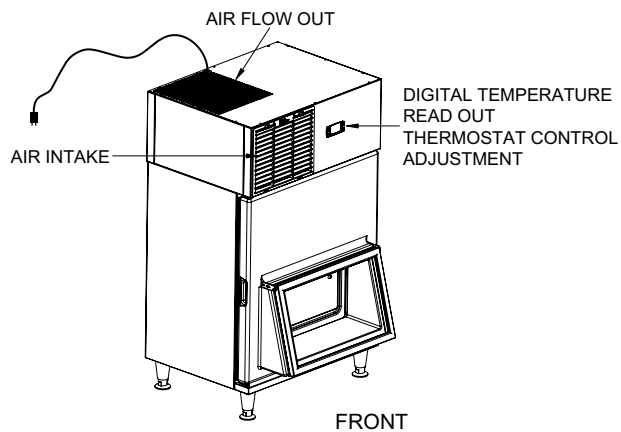

8" OF AIR SPACE IS REQUIRED ABOVE LETTUCE CRISPER TO ALLOW FOR AIR FLOW OUT
WARNING: COMPRESSOR FAILURE DUE TO RESTRICTION OR BLOCKAGE OF AIR FLOW WILL VOID WARRANTY.

ISOMETRIC VIEWS

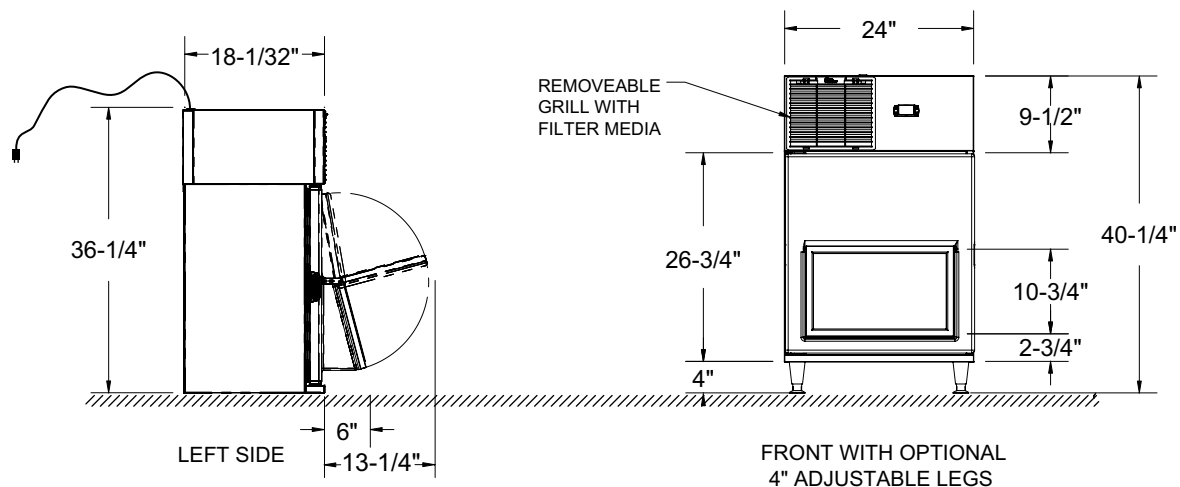

ELEVATION VIEWS



5400 North Michigan Road • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Printed in USA