

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	



LP60-L1-GN(LR)




LP60 is NSF standard 7 listed for open food storage



Conforms to ANSI/UL STD 471  
Certified to CSA STD C22.2 No. 120

## Low Profile Coolers Two, Three and Four Door Self-Contained

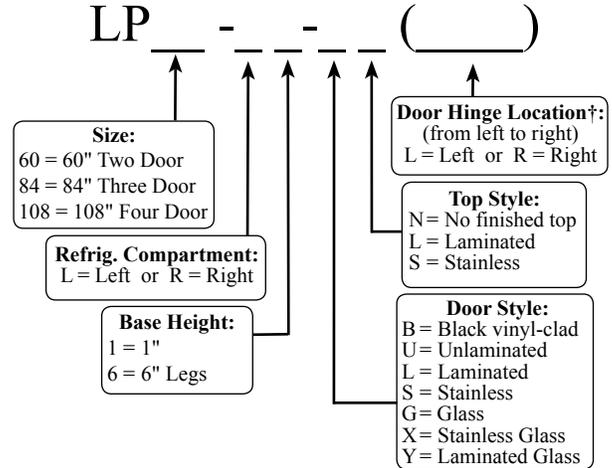

† Specify hinge location for each door

### Standard Features

- Self-contained
- All stainless steel interior construction with radius interior corners for easy cleaning
- Foamed-in-place insulation
- Galvanized steel sub-top
- Black vinyl-clad steel doors and exterior sides
- Six foot grounded cord and plug (exits at rear)
- Stainless steel die cast handle
- Digital control with auto defrost
- Stainless steel evaporator housing with separate removable evaporator drain pan
- Automatic condensate evaporator
- Leg sockets recessed into base
- 1/2" thick ABS plastic threshold scuff plate
- 180° swinging doors

### Specifications

#### Electrical

- 120V, 1 phase, 60 Hz, 6.5 full load amps
- Dedicated 15 amp circuit is required
- Includes a 6 foot grounded cord and plug which exits the back of refrigeration compartment

#### Refrigeration

- 1/4 HP, R134a refrigerant

#### Operating Range

- 34°F (1°C) to 40°F (4°C)

#### Plumbing

- Automatic condensate evaporator. No drain connection required

#### Shelving

- One adjustable coated shelf and one bottom coated rack per door included

#### Legs

- 1-5/8" diameter
- Stainless steel bullet feet

#### Materials

- 22 gauge stainless steel parts include: interior floor, walls, ceiling, front of cabinet, and evaporator housing
- 22 gauge black vinyl-clad parts include: sides, standard doors, and compressor compartment housing
- 22 gauge galvanized steel parts include: exterior sub-top and back
- 16 gauge stainless steel parts include: legs
- 16 gauge galvanized steel parts include: base and compressor compartment base plate
- 16 gauge zinc plated CR steel parts include: leg sockets
- 12 gauge stainless steel parts include: hinges, hinge brackets, and lock brackets

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780  
989.752.4275 • 800.748.0423 • Fax 989.752.4444  
www.glastender.com


Approval/Notes:

Specifications subject to change without notice. For current specifications please visit our website.


# Self-Contained Low Profile Coolers

## Dimensional Information

### LP60

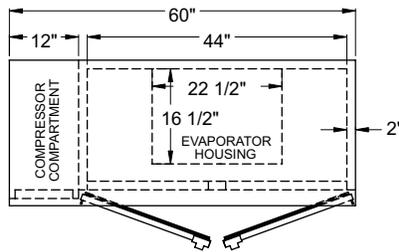


Plan View

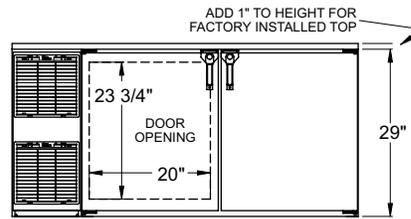


Front Elevation

### LP84

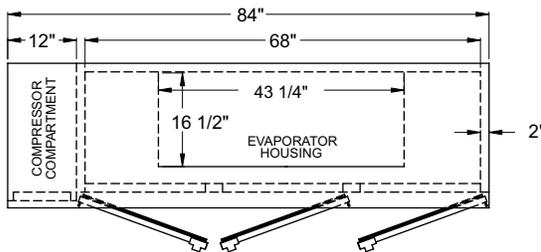


Plan View

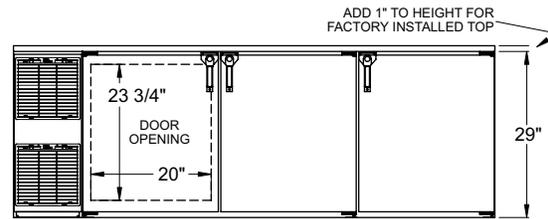


Front Elevation

### LP108

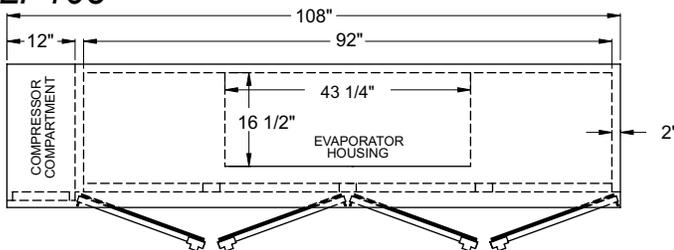


Plan View

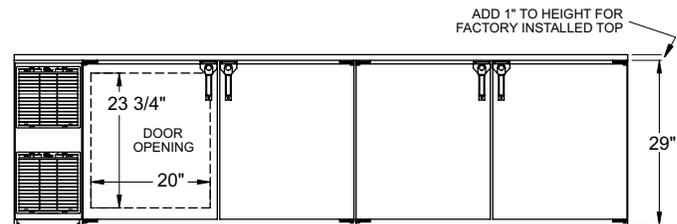

Front Elevation

## Side View All Models

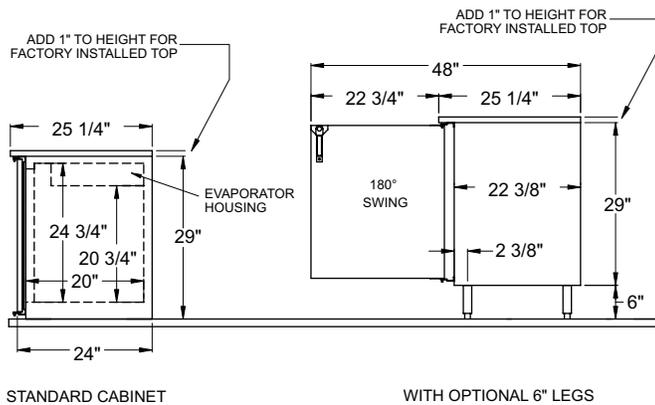

STANDARD CABINET

WITH OPTIONAL 6" LEGS

Model	Capacity: 12 oz. bottle	Refrigeration	Voltage	Amps
LP60	9.77 cases	1/4 H.P. / R134a	120v / 60 Hz / 1 phase	6.5 full load
LP84	15.34 cases	1/4 H.P. / R134a	120v / 60 Hz / 1 phase	6.5 full load
LP108	20.88 cases	1/4 H.P. / R134a	120v / 60 Hz / 1 phase	6.5 full load

Note: Available with compressor left or right. Compressor left model shown. Use Model Number Key to specify location when ordering.



5400 N Michigan Rd • Saginaw, MI • 48604-9780  
989.752.4275 • 800.748.0423 • Fax 989.752.4444  
www.glastender.com