

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	



MFV24-SS(L)



Intertek
 Conforms to ANSI/UL STD 471
 Certified to CSA STD
 C22.2 No. 120

Reach-in Mug Freezers One & Two Door Self-contained

MFV - ()

Size: 24 = 24" One Door 48 = 48" Two Door	Door Style: B = Black vinyl clad U = Unlaminated L = Laminated S = Stainless G = Glass X = Stainless Glass Y = Laminated Glass	Door Hinge Location: (from left to right) L = Left or R = Right
Top Style: N = No finished top L = Laminated S = Stainless		



MFV48-SS(LR)

Standard Features

- Self-contained high capacity refrigeration system
- Digital thermostat control with automatic defrost is easily visible
- Removable refrigeration module for easy maintenance
- All stainless steel interior
- Bottom rack and two adjustable shelves per door
- Includes LED interior lights with on/off switch
- Completely front venting - can be built into a back bar or used as a free standing unit
- Galvanized steel sub top (available with stainless steel or laminated finished top)
- Stainless steel sides
- Automatic condensate evaporator
- Foamed-in-place insulation
- Six foot grounded cord and plug (exits at rear)
- 180° swinging doors

Specifications

Electrical

- 120V, 1 phase, 60 Hz, MFV24 - 5.0 full load amps, MFV48 - 5.5 full load amps
- Dedicated 15 amp circuit is required
- Includes a 6 foot grounded cord and plug which exits the back of refrigeration compartment

Refrigeration

- 1/5 HP, R404A refrigerant

Operating Range

- 0°F (-18°C) to 35°F (2°C)

Plumbing

- Automatic condensate evaporator. No drain connection required

Shelving

- Bottom rack and two shelves included

Capacity

- 10-oz mugs: MFV24 - 108, MFV48 - 252
- 6" high pint glass: MFV24 - 75, MFV48 - 180

Legs

- 1-5/8" diameter
- Stainless steel bullet feet

Materials


- 22 gauge stainless steel parts include: interior floor, walls, ceiling, front of cabinet, and evaporator housing
- 22 gauge black vinyl-clad parts include: standard door(s), and compressor compartment cover
- 22 gauge galvanized steel parts include: exterior sub-top and back
- 20 gauge stainless steel parts include: sides and optional top
- 16 gauge stainless steel parts include: legs
- 16 gauge galvanized steel parts include: base
- 12 gauge stainless steel parts include: hinges, hinge brackets, and lock brackets

Glastender, Inc. • 5400 North Michigan Road • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com	Approval/Notes:
Specifications subject to change without notice. For current specifications please visit our website.	

Reach-In Mug Froster

Dimensional Information


MFV24

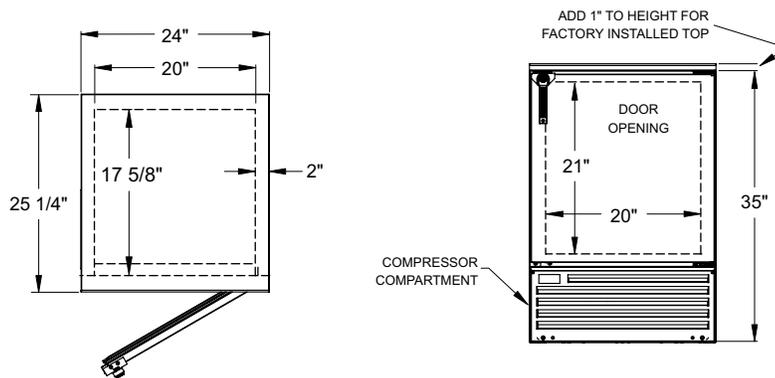

Plan View

Front Elevation


MFV48

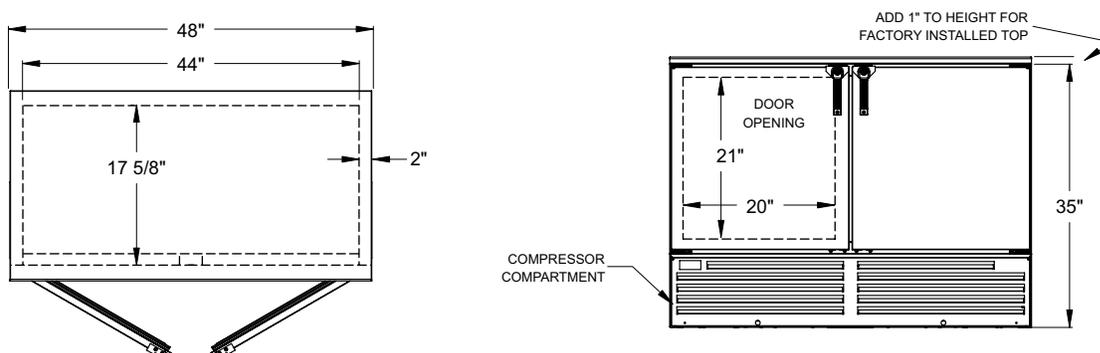

Plan View

Front Elevation

Side View All Models

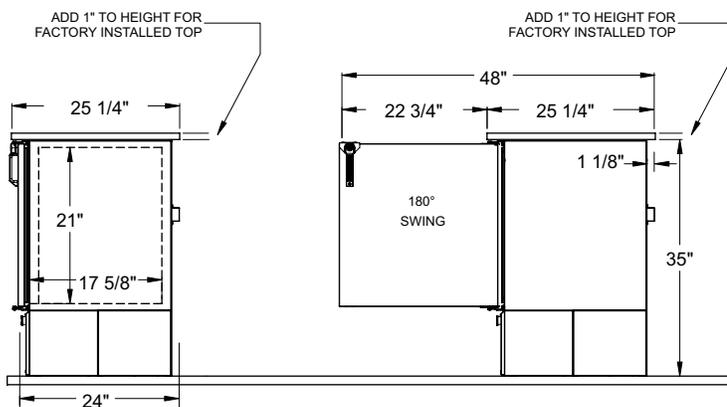

Model	Capacity: 10 oz. mug / 6" high pint glass	Refrigeration	Voltage	Amps
MFV24	108 / 75	1/5 H.P. / R404A	120v / 60 Hz / 1 phase	5.0 full load
MFV48	252 / 180	1/5 H.P. / R404A	120v / 60 Hz / 1 phase	5.5 full load



5400 North Michigan Road • Saginaw, MI • 48604-9780
 989.752.4275 • 800.748.0423 • Fax 989.752.4444
 www.glastender.com

Printed in USA