



MIB-36-H



Specifications

Drain

- 1" stainless steel welded tailpiece. Includes factory installed flexible drain line with on/off valve
- No plumbing required.

Casters

- Four 3" heavy duty rubberized casters
- The two server side casters are locking

Bottle Capacity

- MIB-36 and MIB-36-H hold 96 long neck beer bottles when placed upright with space around each bottle for ice
- MIB-48 and MIB-48-H hold 128 long neck beer bottles when placed upright with space around each bottle for ice
- · Long neck beer bottle capacity on '-ED' models is at least as much as the standard and '-H' models, but may be more depending on bottle placement

Materials

• 20 gauge stainless steel parts include: top, interior liner, perforated inserts and cabinet floor

Project:		AIA#
Item #:	Qty:	SIS#
Model #:		515

Mobile Ice Baths

MIB-36, MIB-36-H, MIB-36-ED MIB-48, MIB-48-H, MIB-48-ED

Standard Features

- · Designed for iced product storage and merchandising, especially long neck bottled beer
- · CFC free foamed-in-place insulated cabinet and ABS breaker strip around liner prevents exterior condensation
- · Heavy duty construction with attractive black vinyl clad exterior that resists scratching
- Stainless steel top, liner, and perforated drain pan inserts with 1/4" radius interior corners for easy cleaning
- Built-in storage area below ice bin. Stainless steel floor has 1/4" radius corners for easy cleaning
- · No plumbing required. Includes a flexible drain line with on/off valve for draining when most convenient
- The standard models have a 30" work height
- The '-H' models feature a taller cabinet base and a 36" work height
- The '-ED' models feature extra deep bath and a 36" work height
- All models available in lengths of 36" or 48"
- Optional towel ring and bottle opener/cap catcher available


Materials (continued)

- 16 gauge galvanized steel parts include: base channels
- 22 gauge galvanized steel parts include: cabinet base interior sides
- 22 gauge black vinyl-clad steel parts include: exterior front, ٠ back and sides



Drain valve operation detail

Glastender, Inc. • 5400 North Michigan Road • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444	Approval/Notes:
WWW.glastender.com Specifications subject to change without notice. For current specifications please visit our website.	
Printed in USA	Rev 05-23-05

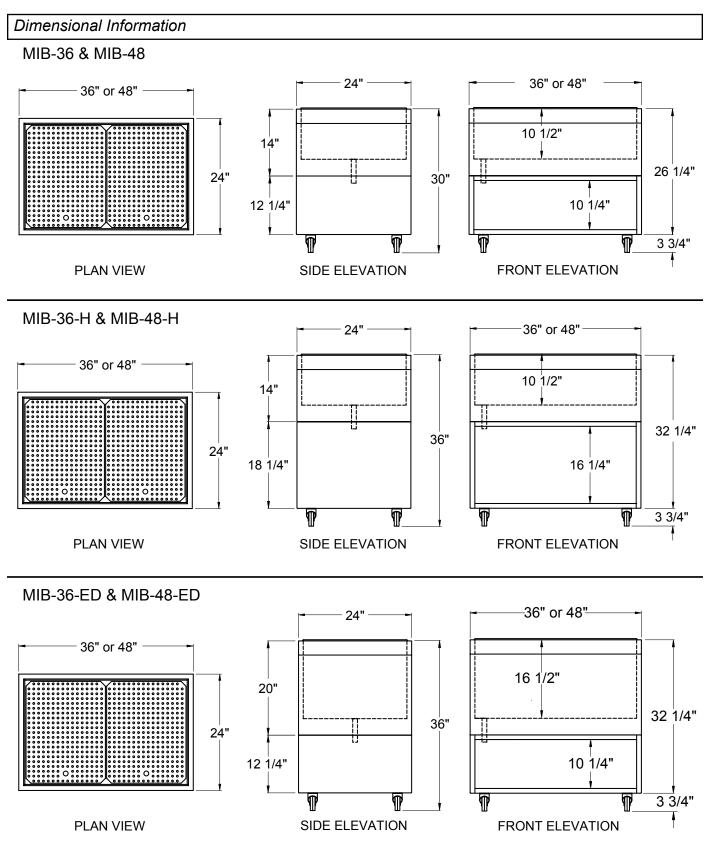



5400 North Michigan Road • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com