

K•Series Cappuccino Dispensers



Standard Features

- Lower Cost Same Great Features These models utilize the same reliable components found in all Cecilware hot beverage dispensers and are designed to service medium volume locations using minimum counter space.
- Your Choice of Back-Lit or Non-Lit Display Models are available with cost saving non-lit-display or eye catching back-lit display.
- Slanted Whipper Chamber Provides optimal mixing of product & keeps it flowing away from the motor seal.
- Fast Flow Dispenses beverages 30% faster, reducing wear and tear on major dispenser components.
- Vacuum Steam Removal System (VSRS) Ensures the powdered mix remains dry to eliminate clogging, caking, & bridging.

Specifications subject to change without notice.




K•Series Cappuccino Dispensers


Models & Dimensions



2K-GB-LD Two Flavor Dispenser

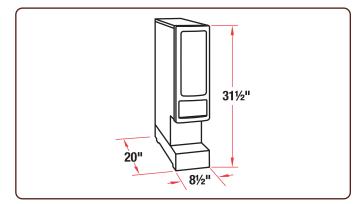


4K-GB-LD/NL Four Flavor Dispenser

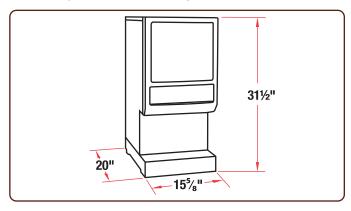


Standard Features For This Series

3K-GB-LD/NL Three Flavor Dispenser

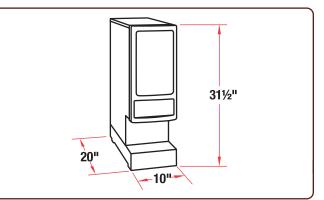

5K-GB-LD/NL & 5K-10-GB-LD Five Flavor Dispenser



Options For This Series

Fast Flow VSRS Coll	ture & Powder lection Tray	Ouick Change	Stainless Service Drip Tray	ess Santed Whipper Chamber Moided Fascia	Portion Control SMARTS	
Specifications						
Model	Display Type	Hopper # & Capacity	Water Tank Capacity	Dimensions W x D x H	Electrical	Ship Weight
2K-GB-LD	Back-Lit	(2) 4 lbs.	2 gal.	8½" x 20" x 31½"	120V, 1.8KW, 15A	70 lbs.
3K-GB-NL	Non-Lit	(3) 4 lbs.	2¾ gal.	10" x 20" x 31½"	120V, 1.8KW, 15A	81 lbs.
3K-GB-LD	Back-Lit	(3) 4 lbs.	2¾ gal.	10" x 20" x 31½"	120V, 1.8KW, 15A	81 lbs.
4K-GB-NL	Non-Lit	(4) 4 lbs.	3¾ gal.	155⁄8" x 20" x 31½"	120V, 1.8KW, 15A	120 lbs.
4K-GB-LD	Back-Lit	(4) 4 lbs.	3¾ gal.	155%" x 20" x 31½"	120V, 1.8KW, 15A	120 lbs.
5K-GB-NL	Non-Lit	(5) 4 lbs.	3¾ gal.	155%" x 20" x 31½"	120V, 1.8KW, 15A	125 lbs.
5K-GB-LD	Back-Lit	(5) 4 lbs.	3¾ gal.	155%" x 20" x 31½"	120V, 1.8KW, 15A	125 lbs.
5K-10-GB-LD	Back-Lit	(1) 10 lbs., (4) 5½ lbs.	6 gal.	18" x 20" x 34"	120V, 1.8KW, 15A	130 lbs.

Plumbing: ¹/₄" Water line required. **Electrical:** Line cord included, Nema plug 5-15R. **Finish:** Black. **Burst Capacity:** 2K = 42, 3K = 53, 4K & 5K = 78, 5K10 = 98, based on 6 oz cups. **Lit Display Area:** $2K 6\frac{1}{2}$ " W x 13" H, $3K 9\frac{1}{2}$ " W x 13" H, 4K/5K/5K10 12%" W x 13" H. **Options:** Portion Control - add "PC" suffix to model number. SmartSenseTM - add "SMT" suffix to model number. Electrical - 120/240V, 3KW, 15A, or 6KW, 25A, export voltage 220 available. *N/A on NL models. **N/A on 2K & NL models. ***N/A on 2K & 3K models. Specifications subject to change without notice.



www.cecilware.com