

Countertop Display Refrigerators



Standard Features



- Choice Model CTR2.68LD with illuminated header display or model CTR3.75 with extra capacity.
- Adjustable Thermostat Temperature can be adjusted between 34°F and 45°F.
- Energy Efficient Double pane thermal glass door with strong magnetic gasket.
- Impulse Sales Merchandise packaged food & beverages.
- ETL Sanitation Conforms To NSF 7 Standard.
- Durable Black Powder Coated Exterior Finish.
- Bright Interior Merchandise Lighting.
- Adjustable PVC Coated Wire Shelves.
- Secure Built-In Door Lock.

Specifications subject to change without notice. Beverages not included.

Cecilware Corporation 43-05 20th. Avenue, LIC NY 11105 Tel: 800.935.2211 / 718.932.1414 Fax: 718.932.7860 Email: customer.service@cecilware.com




Countertop Display Refrigerators




Models & Dimensions

CTR2.68LD Refrigerator with Illuminated Header

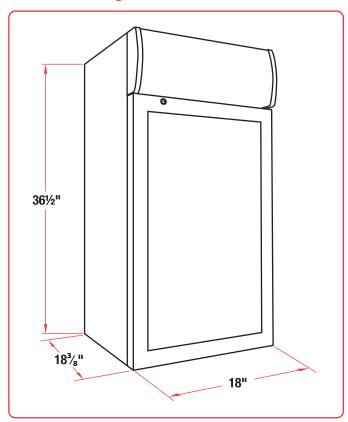

CTR3.75 Five Shelf Refrigerator

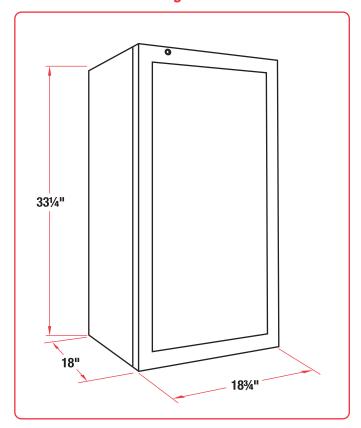

Options

Additional Shelves For CTR2.68LD Part # 08725 Additional Shelves For CTR3.75 Part # 08727 Custom display graphics are available for CTR2.68LD at an additional charge, please contact Cecilware marketing for more information.



Specifications							
	Cubic				Dimensions		Ship
Model	Ft.	Shelves	Temp.	HP	WxDxH	Electrical	Weight
CTR2.68LD	2.7	4	34°F - 45°F	1/8	18" x 18%" x 36½"	120V, .09KW, 1.8A	90 lbs.
CTR3.75	3.8	5	34°F - 45°F	1/8	18¾" x 18" x 33¼"	120V, .09KW, 2A	85 lbs.

Electrical: Cord & plug set included, Nema plug 5-15P. Refrigerant: R-134a. Finish: Black.

Specifications subject to change without notice.

Cecilware Corporation 43-05 20th. Avenue, LIC NY 11105 Tel: 800.935.2211 / 718.932.1414 • Fax: 718.932.7860 Email: customer.service@cecilware.com

