

GLO-RAY[®] Designer INFRARED FOODWARMERS WITH LIGHTS

Models GR2AL-18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84 GR2AHL-18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84 GR2AL-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D GR2AHL-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D

ITFM#

Hatco Glo-Ray[®] *Designer* Infrared Foodwarmers safely keep all hot foods at optimum serving temperatures longer. Foods do not dry out or become discolored; even delicate dishes hold that "just-prepared" look. The Glo-Ray pre-focused heat pattern directs heat from a tubular element to bathe the entire holding surface.

FLEXIBILITY

The continuous aluminum housings, up to 88" (2235 mm) in width, are very strong and eliminate the danger of sagging.

The advanced Glo-Ray Dual Mounting feature allows side-by-side mounting of two warmers to provide a deeper holding area. A 3" or 6" (76 or 152 mm) spacer is available.

Optional sneeze guards, made of shatterproof, easy-to-clean acrylic, are available, providing a safe environment for the food. Check NSF standards and local codes for requirements.


Many combinations of remote control enclosures are available in several sizes, built in accordance with UL Standards to accommodate power switches, infinite controls, indicator lights, and wiring. **Remote control installation is required on all** *Designer* **foodwarmers.**

Designer color foodwarmer and inset panels allow the unit to match the surrounding décor. The powdercoated surfaces provide durability and are easy to clean.

QUALITY

The following features ensure the finest performance for years to come:

- Available in widths from 22" to 88" (559-2235 mm).
- Sturdy continuous aluminum housings eliminate sagging.
- Pre-focused heat maintains safe serving temperatures longer without continuing to cook the food.
- Variety of models, configurations, colors and accessories provide unlimited flexibility.
- Optional coated shatter-resistant incandescent or halogen lights enhance product displays while safeguarding food from bulb breakage.

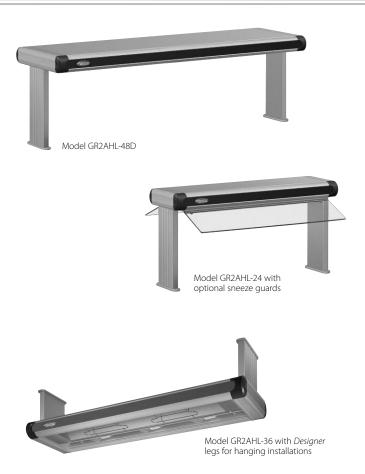

Remote Control Enclosures



Model RMB-D with toggle switches and optional *Designer* color



Model RMB-7L with one toggle and one infinite



METAL SHEATHED ELEMENTS GUARANTEED AGAINST BURNOUT AND BREAKAGE FOR TWO YEAR. HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. (800) 558-0607 • (414) 671-6350 • Fax (800) 543-7521 • Int'l. Fax (414) 671-3976 www.hatcocorp.com • E-mail: equipsales@hatcocorp.com


Form No. GR2AL Spec Sheet

Printed in U.S.A. March 2011



GLO-RAY[®] *designer infrared foodwarmers with lights*

Models GR2AL-18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84 GR2AHL-18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84 GR2AL-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D GR2AHL-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D

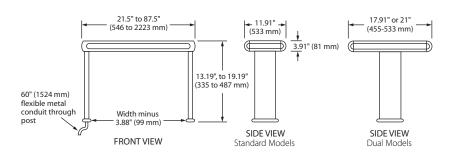

SPECIFICATIONS

High Watt		Standard Watt				
Model ×	Watt	Model	Watt	Width	Shipping Weight •	
GR2AHL-18	470	GR2AL-18	370	21.5" (546 mm)	28 lbs. (12 kg)	
GR2AHL-24	620	GR2AL-24	470	27.5" (699 mm)	32 lbs. (15 kg)	
GR2AHL-30	780	GR2AL-30	570	33.5" (851 mm)	35 lbs. (16 kg)	
GR2AHL-36	980	GR2AL-36	755	39.5" (1003 mm)	37 lbs. (17 kg)	
GR2AHL-42	1130	GR2AL-42	855	45.5" (1156 mm)	53 lbs. (25 kg)	
GR2AHL-48	1340	GR2AL-48	1040	51.5" (1308 mm)	64 lbs. (29 kg)	
GR2AHL-54	1490	GR2AL-54	1165	57.5" (1460 mm)	74 lbs. (34 kg)	
GR2AHL-60	1700	GR2AL-60	1350	63.5" (1613 mm)	83 lbs. (37 kg)	
GR2AHL-66♥	1860	GR2AL-66	1460	69.5" (1765 mm)	93 lbs. (41 kg)	
GR2AHL-72▼	2085	GR2AL-72	1635	75.5" (1918 mm)	101 lbs. (45 kg)	
GR2AHL-84▲	2470	GR2AL-84▼	1920	87.5" (2223 mm)	123 lbs. (54 kg)	

High Watt Dual		Standard Watt Dual				
Model*	Watt	Model	Watt	Width	Shipping Weight •	
GR2AHL-18D	820	GR2AL-18D	620	21.5" (546 mm)	44 lbs. (20 kg)	
GR2AHL-24D	1120	GR2AL-24D	820	27.5" (699 mm)	48 lbs. (22 kg)	
GR2AHL-30D	1440	GR2AL-30D	1020	33.5" (851 mm)	52 lbs. (24 kg)	
GR2AHL-36D	1780	GR2AL-36D	1330	39.5" (1003 mm)	58 lbs. (26 kg)	
GR2AHL-42D	2080	GR2AL-42D	1530	45.5" (1156 mm)	67 lbs. (30 kg)	
GR2AHL-48D	2440	GR2AL-48D	1840	51.5" (1308 mm)	79 lbs. (35 kg)	
GR2AHL-54D	2740	GR2AL-54D	2090	57.5" (1460 mm)	91 lbs. (40 kg)	
GR2AHL-60D	3100	GR2AL-60D	2400	63.5" (1613 mm)	100 lbs. (44 kg)	
GR2AHL-66D	3420	GR2AL-66D	2620	69.5" (1765 mm)	110 lbs. (49 kg)	
GR2AHL-72D	3810	GR2AL-72D	2910	75.5" (1918 mm)	120 lbs. (53 kg)	
GR2AHL-84D★	4520	GR2AL-84D	3420	87.5" (2223 mm)	141 lbs. (63 kg)	

When no color is specified, color inset panels and corner caps will be black.
Does not include RMB. ▼ When using an infinite control with 120 volt model, tandem elements are required, cord not available.

▲ 120 volt models require additional switches and tandem (end-to-end) elements.

120 volt models with infinite controls not available. * 120 volt models not available.

OPTIONS (NOT FOR RETROFIT)

- □ Unit, Inset Panel, and Remote Control Enclosure *Designer* Colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper
- Dark Gray Designer Corner Caps (Black is standard)
- □ Sneeze Guards 7.5" or 14" (191 or 356 mm)
- □ 3" or 6" (76 or 152 mm) Spacer

PRODUCT SPECS Designer Infrared Foodwarmer

The *Designer* Infrared Foodwarmer with Lights shall be a Glo-Ray[®], manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A. With 24/7 service (U.S. and Canada only), the Foodwarmer shall be a Glo-Ray Model ..., rated at ... watts, ... volts, single phase and be ... inches (millimeters) in overall width.

The Glo-Ray shall consist of an aluminum housing and include as standard equipment 14" (356 mm) *Designer* legs.

DIMENSIONS

GR2AL & GR2AHL: 21.5"-87.5"W x 11.91"D x 3.19"H without legs (546-2223 x 3.2 x 81 mm).

GR2AL-XXD & GR2AHL-XXD: 21.5"-87.5"W x 17.91" or 21"D x 3.19"H without legs (546-2223 x 455 or 533 x 81 mm).

VOLTAGE

120, 120/208, and 120/240 volts, single phase.

Export voltages available.

REMOTE CONTROL ENCLOSURES

Model	Width	Toggle Switches
RMB-3	5.5" (140 mm)	2 Maximum
RMB-7	9" (229 mm)	4 Maximum
RMB-14	14" (356 mm)	6 Maximum
RMB-16	16" (406 mm)	3 Maximum
RMB-20	20" (508 mm)	3 Maximum

NOTE: ONE CONTROL BOX PER FOODWARMER.

MOUNTING REQUIREMENTS

Recommended Mounting Height – Single Infrared Foodwarmer Models Standard Watt: 10"-12" (254-305 mm) High Watt: 12"-14" (305-356 mm) Dual Infrared Foodwarmer Models Standard Watt: 10"-14" (254-356 mm) High Watt: 14"-16" (356-406 mm)

MINIMUM SPACING -

May not be installed in combustible surroundings. Must be installed no closer than 6" (152 mm) from a non-combustible back wall and above a non-combustible surface.

- □ Designer Non-Adjustable Stands 10", 12", 16" (254, 305, 406 mm) Height in lieu of Standard 14" (356 mm) Stands
- □ 4" (102 mm) Designer Overhead Mounts
- □ Halogen Bulb in lieu of Standard Display Light (60 watt)
- Extra Lamps

The infrared heating element shall be tubular metal sheathed. The foodwarmer shall be factory assembled ready for electrical installation. Options shall include *Designer* non-adjustable tubular legs in various sizes, hanger legs, dark gray *Designer* corner caps, sneeze guards, and remote control enclosure.

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. • (800) 558-0607 • (414) 671-6350 Fax (800) 543-7521 • Int'l. Fax (414) 671-3976 • www.hatcocorp.com • E-mail: equipsales@hatcocorp.com