



CRE572

Low-Profile Refrigerated Equipment Stand

CRE572
5/28/15
Item # 13349



- Stainless steel exterior front, sides and top
- Anodized aluminum interior sides and back with stainless steel interior floor
- 16 gauge stainless steel top with marine edge front and rear and 1" turn-up at each end
- Top is provided with an exclusive, built in, Hoshizaki ceramic heat shield
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Cabinet and drawers are insulated with 2" CFC free foamed in place polyurethane
- Stainless steel exterior drawer with stainless steel interior
- Drawer slides are constructed of 14 gauge stainless steel with acetal rollers
- Drawers have a 250 lb. dynamic load rating
- Drawers will accommodate (2) 12" x 20" x 6" deep pans (pans by others)
- Drawer frames are formed of 14 gauge stainless steel and securely fastened to cabinet
- Drawers are equipped with finger cut-outs for easy removal of pans
- Extruded aluminum flush mount drawer handles
- Magnetic drawer gasket is easily removable for cleaning
- Removable stainless steel end panel for access to refrigeration system
- Enamel coated evaporator coil
- Energy efficient automatic hot gas condensate evaporator
- Standard with (6) 4" casters all with brakes
- Three year parts and labor warranty
- Five year compressor warranty
- 8 ft. cord and plug

Hoshizaki America, Inc. reserves the right to change specifications without notice.

Item #

Project:

Qty:

*AutoCad available on KCL

CRE572 Dimensions W x D x H

2 Section - 72.5" x 33.25" x 27"*

*with 4" casters

Electrical/Refrigeration

Voltage 115/60/1

HACR Breaker
2 Section - 5-15P

Voltage Range 104-126

Ambient Temp. Range 45° to 100°F

Control Setpoint Range 28° to 45°F

*Refrigerant R-134a

Warranty

Valid in United States, Canada, Puerto Rico, and U.S. Territories. Contact factory for warranty in other countries.

- Three Year - Parts & Labor on entire machine.
- Five Year - Parts on: Compressor.

Options

- Drawer divider bars

Dimensions / Capacity

Model #	Two Section CRE572
Overall Width x Depth	72.5" x 33.25"
Height To Work Surface (including 4" casters)	26"
Depth with Drawer Fully Open (Including 1.5" Bumper)	55.75"
Pan Capacity (12" x 20")	8
Maximum Pan Depth	6"
Worktop Maximum Load Capacity	1200 lbs
Crated Shipping Weight	410 lbs
Crated Height x Width x Depth	28.75" x 74" x 34.25"

Electrical / Refrigeration Data

Model #	Two Section CRE572
Amperage	4.3
Energy Consumption (kwh/day) NSF	2.8
Heat Rejection (BTU/Hr.) @NSF	398.1
Approx. Nominal Compres. BTU/HR (HP)	1386 (1/5HP)




© HOSHIZAKI AMERICA, INC.

618 Hwy, 74 S., Peachtree City, GA 30269
TEL 800-438-6087
FAX 800-345-1325
www.hoshizaki.com




CRES72


Low-Profile Refrigerated Equipment Stand

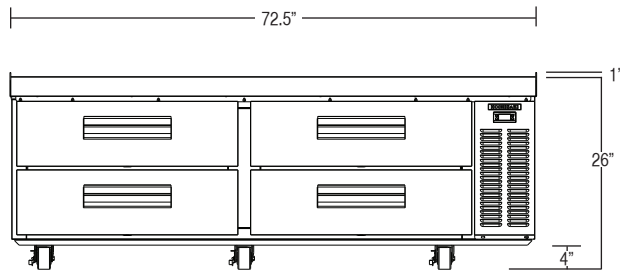

**CRES72
FRONT VIEW**

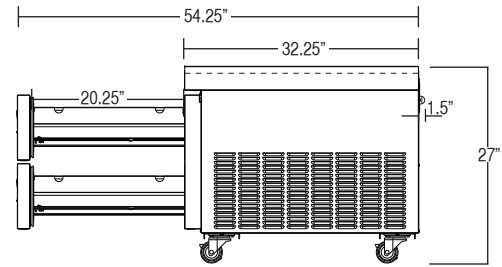

**CRES72
SIDE VIEW**

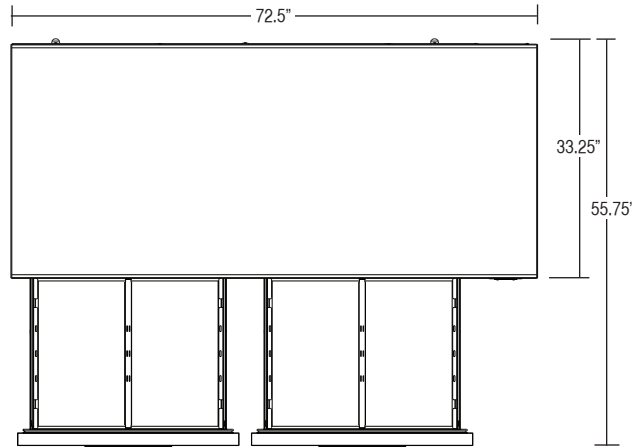

**CRES72
PLAN VIEW**

Cabinet Construction

The exterior cabinet front, sides, and top are constructed of high quality stainless steel. The exterior back and bottom are constructed of coated steel. The cabinet interior walls and ceiling are anodized aluminum. The floor is constructed of heavy gauge stainless steel with coved corner construction. Heavy duty ABS thermal breaks are used to reduce heat transfer in the frames. Cabinet walls and drawers are insulated with 2" of environmentally friendly R-134a, CFC free, foamed in place polyurethane. 4" heavy duty platform casters (all with brakes) are standard and installed at the factory.

Drawer Construction

Drawer fronts are constructed of high grade stainless steel with stainless steel interior and are insulated with R-134a CFC free foamed in place polyurethane. Each drawer accommodates (2) 12" X 20" X 6" deep pans (pans by others). (Drawers will also accept 1/6th, 1/3rd, and 1/2 size pans with adapter bars optional). Drawer module frames are formed of 14 gauge stainless steel all welded construction and securely fastened in the cabinet. The drawer slides are constructed of heavy duty 14 gauge stainless steel with durable acetal rollers with stainless steel ball bearings to prevent metal to metal contact. The drawer slides have a dynamic load capacity of 250 lbs. and have been life tested (fully loaded) three hundred thousand cycles without showing significant wear. The flush mount handles are constructed of extruded aluminum. Snap-in magnetic drawer gaskets are durable and easily removed for cleaning.

Refrigeration System

Solid state digital controller with temperature alarms maintains optimum cabinet temperature between 33°F and 41°F. A LED display shows the cabinet temperature and is adjustable to Fahrenheit or Celsius. The CRES72 has a front breathing refrigeration system. The high efficiency refrigeration system is standard with an enamel coated evaporator for extended life. Condensate removal is accomplished with an energy efficient hot gas condensate evaporator system. A capillary tube controls the flow of environmentally friendly R-134a refrigerant through the evaporator. Refrigeration system utilizes a heated defrost to eliminate any ice on the evaporator coil. 115 volt units are equipped with an eight foot cord and plug (20.0 amps or less).