

F-2000MRH-C

MODULAR CUBELET ICE MACHINE

Item # _____

Project: _____

Qty: _____

*AutoCad available on KCL

F-2000MRH-C

10/10

Item # 13235


CUBELET DIMENSIONS

W x D x H


F-2000MRH-C
30 x 27^{1/2} x 34^{7/16}




B-500



B-700



B-800




B-900



F-2000MRH-C

Remote Air-Cooled
Shown on an optional
B-900

Also available on Large Bins:
B-1150SS
B-1300SS
B-1500SS
B-1650SS

- Up to 1715 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- CleanCycle I2® Design 
- 15 minute flush cycle every 12 hours
- Removes sediment
- Cleaner ice
- Longer life and easy maintenance
- R-404A Refrigerant



ISO 9001:2015 (4E01)

Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Three Year - Parts & Labor on entire machine. (Serial numbers VxxxxxJ and after.)

Five Year - Parts on: Compressor, air-cooled condenser.



F-2000MRH-C MODULAR CUBELET ICE MACHINE

DIMENSIONS
W x D x H
F-2000MRH-C
30 x 27^{1/2} x 34^{7/16}

• Remote Air-cooled

REMOTE AIR-COOLED

Water Temp° F.	50°	70°	90°	
Air Temp° F.	70°	1715	1660	1630
	80°	1595	1560	1530
	90°	1500	1490	1435

UTILITY CONSUMPTION


Model Number	KWH per 100 LBS. 90/70	Potable Water Gal. per 100 lbs.
F-2000MRH-C	4.6	12.0

SPECIFICATIONS


Model Number	Amperage	Min. Circuit Ampacity	Shipping Weight
F-2000MRH-C	19.4	30	360 lbs.

STORAGE BINS


Model Number	Application Capacity	ARI-Rated Capacity
B-500	500 lbs.	360 lbs.
B-700	700 lbs.	550 lbs.
B-800	800 lbs.	600 lbs.
B-900	900 lbs.	660 lbs.
B-1150	1150 lbs.	N/A
B-1300	1275 lbs.	N/A
B-1500	1490 lbs.	N/A
B-1650	1605 lbs.	N/A




FRONT VIEW




LEFT SIDE VIEW



RIGHT SIDE VIEW

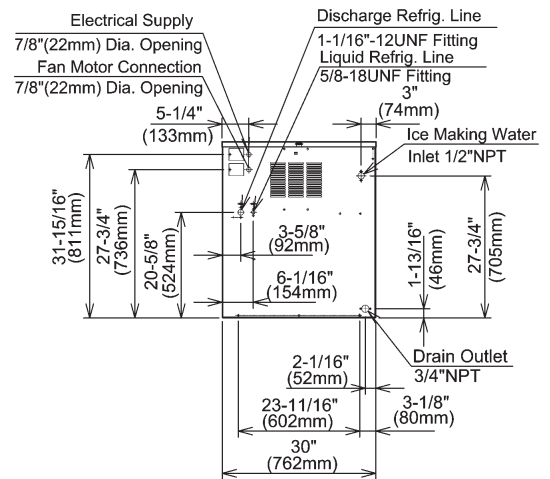


REMOTE AIR-COOLED UNIT



ICE DROP ZONE

URC-22F Remote Condenser (Sold Separately)
For Use with F-2000MRH-C

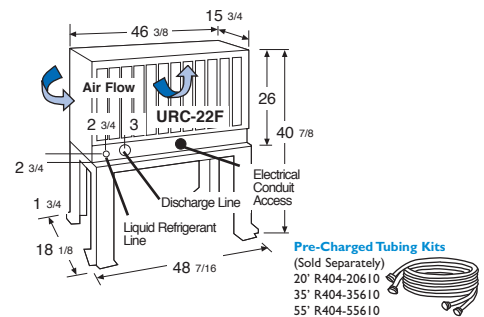

Pre-Charged Tubing Kits (Sold Separately)
20' R404-20610
35' R404-35610
55' R404-55610

Voltage supply for the URC Remote Condenser is supplied from the Ice Maker. No additional circuit is required.

ELECTRICAL & PLUMBING/F-2000MRH-C

- 208-230/60/1 (3 wire dedicated neutral for 115V)
- 3/8" OD copper or equivalent independent water supply
- 3/4" FPT independent drain connection



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 187 - 253V

SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filter.

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

