

# F-2001MRH-C

## MODULAR CUBELET ICE MACHINE

Item # \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

\*AutoCad available on KCL

F-2001MRH-C

7/14

Item #I3342


### CUBELET DIMENSIONS

W x D x H


**F-2001MRH-C**  
30 x 27<sup>1/2</sup> x 34<sup>7/16</sup>




B-500



B-700



B-800



B-900

Also available on Large Bins:


B-1150SS

B-1300SS

B-1500SS

B-1650SS

### \*CUBELET DIMENSIONS



\*approximate size in inches, image not to scale

### F-2001MRH-C

Remote Air-Cooled  
Shown on an optional  
B-900



- Up to 1814 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- Advanced CleanCycle24® Design
- Removes sediment
- Cleaner ice
- Longer life and easy maintenance
- R-404A Refrigerant



### Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

**Three Year** - Parts & Labor on entire machine. (Serial numbers Vxxxxxj and after.)

**Five Year** - Parts on: Compressor, air-cooled condenser.



# Hoshizaki

## F-2001MRH-C MODULAR CUBELET ICE MACHINE

**DIMENSIONS**  
W x D x H  
**F-2001MRH-C**  
30 x 27<sup>1/2</sup> x 34<sup>7/16</sup>

• Remote Air-cooled

### REMOTE AIR-COOLED

Water Temp° F.	50°	70°	90°	
Air Temp° F.	70°	1814	1749	1700
	80°	1652	1605	1559
	90°	1515	1496	1430

### UTILITY CONSUMPTION

Model Number	KWH per 100 LBS. 90/70	Potable Water Gal. per 100 lbs.
F-2001MRH-C	5.1	12.0

### SPECIFICATIONS

Model Number	Amperage	Min. Circuit Ampacity	Shipping Weight
F-2001MRH-C	19.94	30	360 lbs.

### STORAGE BINS

Model Number	Application Capacity	ARI-Rated Capacity
B-500	500 lbs.	360 lbs.
B-700	700 lbs.	550 lbs.
B-800	800 lbs.	600 lbs.
B-900	900 lbs.	660 lbs.
B-1150	1150 lbs.	N/A
B-1300	1275 lbs.	N/A
B-1500	1490 lbs.	N/A
B-1650	1605 lbs.	N/A


### ELECTRICAL & PLUMBING/F-2001MRH-C

- 208-230/60/1 (3 wire dedicated neutral for 115V)
- 3/8" OD copper or equivalent independent water supply with 1/4" nominal ID minimum
- 3/4" FPT independent drain connection




© HOSHIZAKI AMERICA, INC.


618 Hwy. 74 S., Peachtree City, GA 30269




FRONT VIEW



LEFT SIDE VIEW




RIGHT SIDE VIEW

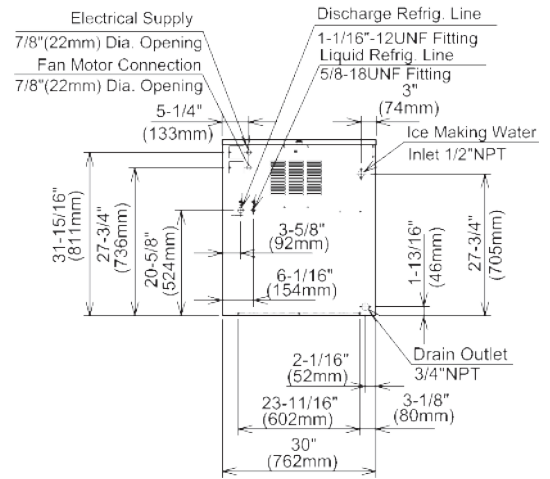

REMOTE AIR-COOLED UNIT

URC-22F Remote Condenser (Sold Separately)  
For Use with F-2001MRH-C

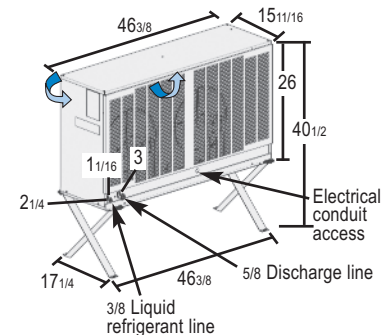

Voltage supply for the URC Remote Condenser is supplied from the Ice Maker. No additional circuit is required.

Pre-Charged Tubing Kits (Sold Separately)  
20' R404-20610  
35' R404-35610  
55' R404-55610



### OPERATING LIMITS

• Ambient Temp Range	45 - 100°F
• Water Temp Range	45 - 90°F
• Water Pressure	10 - 113psig
• Voltage Range	187 - 253V

### SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filter.

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

