Item#_

FD-650M H-C

Project:

MODULAR CUBELET ICE MACHINE

SLIM-LINE DISPENSER SERIES

FD-650M H-C 10/13 Item # 13327

CUBELET DIMENSIONS

FD-650M_H-C $22 \times 24 \times 26$



FD-650MAH-C

Air-Cooled Shown on an optional Lancer 30" Dispenser

- Up to 650 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- Advanced CleanCycle24[®] Design
- Produces ideal chewable cubelet ice
- Dispenser ready / infrared bin control
- Protected by H-GUARD Plus Antimicrobial Agent [H-GUARD]



* The FD-650MAH is ENERGY STAR qualified.





Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in

Three Year - Parts & Labor on entire machine. (Serial numbers Vxxxxx) and after.) Five Year - Parts on compressor, air-cooled condenser coil.





DIMENSIONS W x D x H FD-650MAH-C 22 x 24 x 26

OMALI C

FD-650M_H-C CUBELET ICE MACHINE SLIM-LINE DISPENSER SERIES

Air-cooled

AIR-COOLED

Water Temp° F.		50°	70°	90°	
Temp F.	70°	650	627	593	
	80°	576	523	490	
Air	90°	490	474	439	


UTILITY CONSUMPTION

Model Number	KWH per 100 LBS. 90/70	Potable Water Gal. per 100 lbs.	
FD-650MAH-C	5.35	12.0	

SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
FD-650MAH-C	Air-Cooled	11.2	20	205 lbs.

*CUBELET DIMENSIONS





*approximate size in inches, image not to scale

ELECTRICAL & PLUMBING/FD-650M_H-C

• 3/8" OD copper or equivalent independent potable water supply

560 [22] AIR FLOW FRONT VIEW SIDE VIEW SIDE VIEW



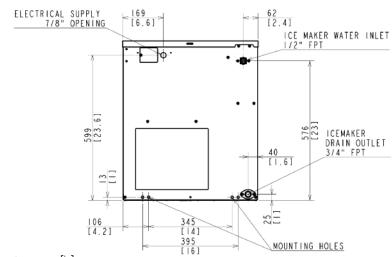

All measurements are mm [in]

SERVICE

AIR-COOLED UNIT

OPERATING LIMITS

- Ambient Temp Range
- Water Temp Range
- Water Pressure
- Voltage Range
- 45 100°F 45 - 90°F 10 - 113psig
- 10 113psig
- F
- accessible for service.

 Removable/cleanable air filter.

• Panels easily removed and all components

Removable/cleanable air filter (Air-Cooled model only)

• 3/4" FPT independent drain connection



• 115V/60/1

