

# KM-1301S\_H-P

## STACKABLE ICE CUBER

### TAMPER PROOF MODEL

Item # \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

\*AutoCad available on KCL

KM-1301S\_H-P

5/14

Item #13322

#### CUBER DIMENSIONS

W x D x H

**KM-1301S\_H-P**  
48 x 27<sup>3/8</sup> x 27<sup>3/8</sup>






Exterior Fasteners are Tamper Proof Torx Pin Screws

**KM-1301SAH-P**  
Air-Cooled I Phase


**KM-1301SWH-P**  
Water-Cooled I Phase



Shown on standard bin for placement only.

- Up to 1329 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- Protected by H-GUARD Plus Antimicrobial Agent 
- CycleSaver® design 
- EverCheck® alert system 
- Individual crescent cube
- Stainless steel evaporator
- Stackable for 2658 lbs. per 24 hour ice production in the same floor space
- Removable air filters located under front panel (Air-cooled model only)
- R-404A Refrigerant

#### KM CUBE DIMENSIONS



\*\*approximate size in inches, image not to scale



#### Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

**Three Year** - Parts & Labor on entire machine.

**Five Year** - Parts & Labor on: Evaporator.

**Five Year** - Parts on: Compressor, air-cooled condenser coil.



# Hoshizaki

## KM-130IS\_H-P STACKABLE ICE CUBER

**DIMENSIONS**  
W x D x H  
**KM-130IS\_H-P**  
48 x 27<sup>3/8</sup> x 27<sup>3/8</sup>

### STACKABLE ICE CUBER

- Air-cooled
- Water-cooled

#### AIR - COOLED

Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	1329	1281	1188
80°	1292	1217	1109
90°	1281	<b>1164</b>	1060

#### WATER - COOLED


Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	1318	1319	1249
80°	1319	1321	1211
90°	1319	<b>1323</b>	1228

#### UTILITY CONSUMPTION


Model Number	Ice Production Per Cycle		KWH per 100 LBS.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.
	Lbs.	Cubes			
KM-1301SAH-P	29.8	1440	4.63	15.7	N/A
KM-1301SWH-P	31.0	1440	3.2	19.4	118

#### SPECIFICATIONS


Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KM-1301SAH-P	Air-Cooled	12.4	20	315 lbs.
KM-1301SWH-P	Water-Cooled	8.2	20	315 lbs.

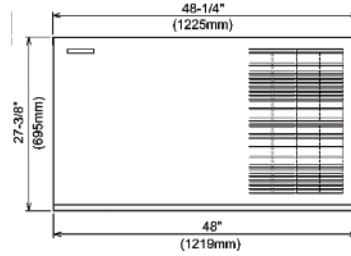


FRONT VIEW




SIDE VIEW



ICE DROP ZONE

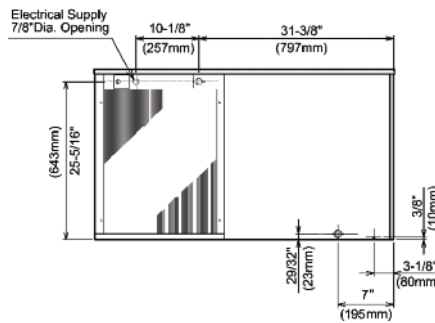

AIR-COOLED UNIT

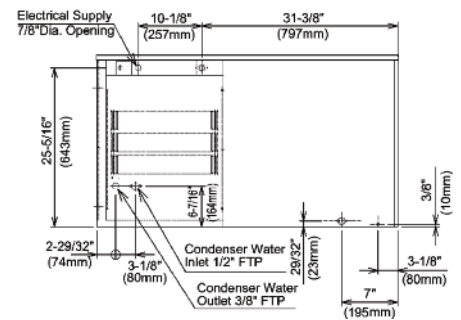

WATER-COOLED UNIT

#### ELECTRICAL & PLUMBING/KM-130IS\_H-P

- 208 - 230V/60/1
- 20 amp Max Fuse/HACR Breaker Size
- 1/2" OD copper or equivalent independent potable water supply with 3/8" nominal ID minimum
- 3/4" FPT independent drain connection

#### OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 187 - 253V

#### SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filters under front panel (Air-cooled model only)
- Exterior fasteners are tamper proof torx pin screws.



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

