

# KM-1900S\_H-P

## STACKABLE ICE CUBER

### TAMPER PROOF MODEL

Item # \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

\*AutoCad available on KCL

KM-1900S\_H-P

5/14

Item #I3323

#### CUBER DIMENSIONS

W x D x H

**KM-1900S\_H-P**  
48 x 27<sup>3/8</sup> x 36<sup>7/16</sup>



Exterior Fasteners are Tamper Proof Torx Pin Screws



Shown on standard bin for placement only.

#### KM-1900SAH-P


Air-Cooled 1 Phase

#### KM-1900SWH-P

Water-Cooled 1 Phase

- Up to 1876 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- Protected by H-GUARD Plus Antimicrobial Agent 
- CycleSaver® design 
- EverCheck® alert system 
- Individual crescent cube
- Stainless steel evaporator
- Stackable for 3752 lbs. per 24 hour ice production in the same floor space
- Removable air filters located under front panel (Air-cooled model only)
- R-404A Refrigerant
- \* The KM-1900SAH is ENERGY STAR qualified.

#### KM CUBE DIMENSIONS



\*\*approximate size in inches, image not to scale



#### Warranty

Valid in United States, Canada, Puerto Rico, & U.S.Territories. Contact factory for warranty in other countries.

**Three Year** - Parts & Labor on entire machine.

**Five Year** - Parts & Labor on: Evaporator.

**Five Year** - Parts on: Compressor, air-cooled condenser coil.



# Hoshizaki

## KM-1900S\_H-P STACKABLE ICE CUBER

**DIMENSIONS**  
W x D x H  
**KM-1900S\_H-P**  
48 x 27<sup>3/8</sup> x 36<sup>7/16</sup>

### STACKABLE ICE CUBER

- Air-cooled 1 phase
- Water-cooled 1 phase

#### AIR - COOLED

Water Temp° F.	50°	70°	90°	
Air Temp° F.	70°	1867	1777	1638
	80°	1798	1659	1511
	90°	1777	<b>1560</b>	1413

#### WATER - COOLED


Water Temp° F.	50°	70°	90°	
Air Temp° F.	70°	1876	1868	1734
	80°	1870	1858	1655
	90°	1868	<b>1850</b>	1673

#### UTILITY CONSUMPTION


Model Number	Ice Production Per Cycle		KWH per 100 LBS.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.
	Lbs.	Cubes			
KM-1900SAH-P	45.3	2160	4.1	18.8	N/A
KM-1900SWH-P	47.0	2160	3.1	18.8	99

#### SPECIFICATIONS


Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KM-1900SAH-P	Air-Cooled	14.4	30	415 lbs.
KM-1900SWH-P	Water-Cooled	12.5	30	415 lbs.

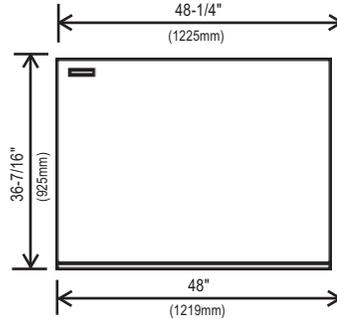


FRONT VIEW

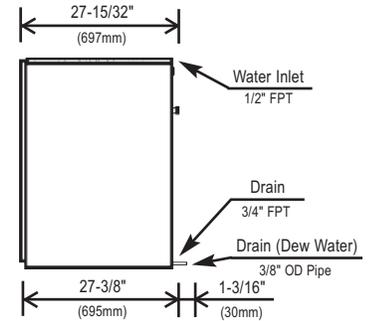


SIDE VIEW

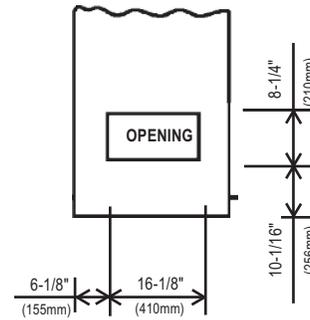

ICE DROP ZONE

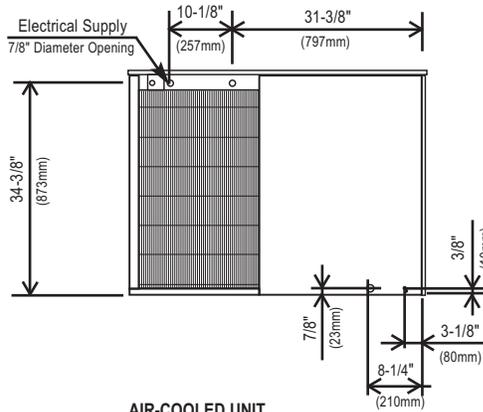

AIR-COOLED UNIT

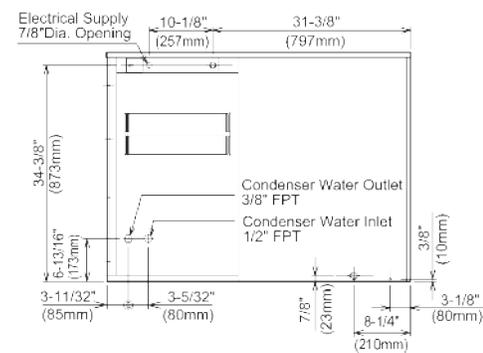

WATER-COOLED UNIT

#### ELECTRICAL & PLUMBING/KM-1900S\_H-P

- 208 - 230V/60/1ø (3 wire with neutral for 115V)
- 30 amp Max Fuse/HACR Breaker Size
- 1/2" OD copper or equivalent independent potable water supply with 3/8" nominal ID minimum
- 3/4" FPT independent drain connection

#### OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 187 - 253V

#### SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filters under front panel (Air-cooled model only)
- Exterior fasteners are tamper proof torx pin screws.



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

