

KM-600MAH

SLIM-LINE MODULAR CRESCENT CUBER

Item # _____

Project: _____

Qty: _____

*AutoCad available on KCL

KM-600MAH

6/11


Item # 13231

CUBER DIMENSIONS

W x D x H

KM-600M_H

22 x 27^{3/8} x 37^{7/16}

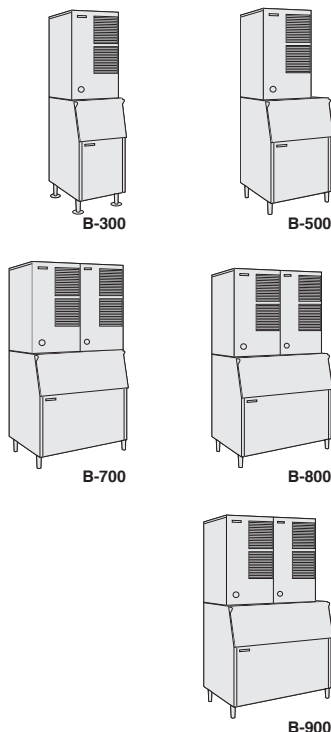

Also available on Large Bins:




B-1150SS
B-1300SS
B-1500SS
B-1650SS

KM-600MAH

Air-Cooled

Shown on an optional
B-300 Bin



- 115 - 120V supply voltage
- Up to 592 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- Protected by *H-GUARD Plus* Antimicrobial Agent 
- Individual crescent cube
- CycleSaver® Design 
- EverCheck® alert system 
- Stainless steel evaporator
- Mount two units side-by-side, in only 44" of floor space, for 1,184 lbs. per 24 hours
- Removable air filters (Air-cooled model only)
- R-404A Refrigerant

* The KM-600MAH is ENERGY STAR qualified.

Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Three Year - Parts & Labor on entire machine.

Five Year - Parts & Labor on: Evaporator.

Five Year - Parts on: Compressor, air-cooled condenser coil.



ISO 9001:2015 CERTIFIED

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com



DIMENSIONS
W x D x H
KM-600MAH
22 x 27^{3/8} x 37^{7/16}


AIR-COOLED

UTILITY CONSUMPTION


SPECIFICATIONS

STORAGE BINS


FRONT VIEW



SIDE VIEW



ICE DROP ZONE

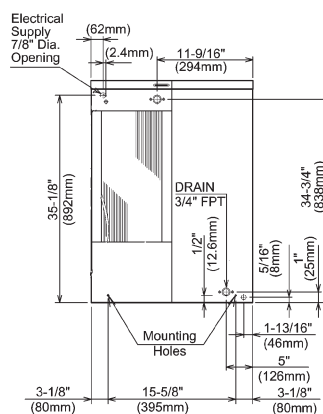

AIR-COOLED UNIT

- 115-120V/60/1
- 15 Amp Max Fuse/HACR Breaker Size
- 3/8" OD copper or equivalent independent potable water supply
- 3/4" FPT independent water drain



OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V

SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filters.
(Air-cooled model only)

