

## GR Series - Reach In Hinged Glass Doors Refrigerators - Top Mount

• PRODUCT SPECIFICATIONS SHEETS



- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity

Self-Contained Remote	GR22 R-GR22	GR48 R-GR48	GR75 R-GR75	GR102 R-GR102
Length	26-1/2"	52-1/4"	78"	103-3/4"
Height with casters	83"	83"	83"	83"
Depth with drain cover (Dimensions are +/-1/4")	36-1/2"	36-1/2"	36-1/2"	36-1/2"

- Specification subject to change without notice

## GR Series - Reach In Hinged Glass Doors Refrigerators - Top Mount

### Standard Specifications and Optional Features

<p><b>CONSTRUCTION</b>          UL Classified to ANSI/NSF 7          Heavy duty construction          CFC free foamed in place insulation          Removable front grille for easy servicing          1, 2, 3 or 4 door models available          Heavy duty edge mounted hinges</p>	<p><b>FINISHES</b>          Doors-Anthony style 101-chrome finish          Exterior-designer white          Interior-designer white          Rear-designer white</p>
<p><b>INTERIOR</b>          White aluminum ends and back          White aluminum floor          Aluminum evaporator fan housing          4 Heavy duty epoxy coated shelves per door</p>	<p><b>REFRIGERATION</b>          Top mounted condensing unit          R134a refrigeration          1, 2, &amp; 3 door, Capillary tube          4 door-expansion valve          Electric condensate pan          Remote available</p>
<p><b>EXTERIOR</b>          White aluminum ends and fronts          Double pane glass doors 23-3/4"X62-1/4"  <i>(provides wide view display)</i>          Externally mounted dial thermometer          5" Casters</p>	<p><b>LIGHTING</b>          Vertical light behind mullion          1 Dr = 1 light          2 Dr = 1 light          3 Dr = 2 lights          4 Dr = 3 lights</p>
<p><b>ELECTRICAL REQUIREMENTS</b>          1,2,3 Door Units 115V/60Hz/1Ph          Cord and plug          4 Door 115V/208-230V/60Hz/1Ph          Unit must be hard wired          UL/CUL listed</p>	<p><b>Important Note: All refrigerated cases are designed to operate in an environment of 75 degrees and 55% relative humidity.</b></p> <p><b>Important Note: Product must be cooled before being displayed within the case.</b></p>

### OPTIONAL FEATURES

<p>Stainless steel, laminate or paint          Digital thermometer          Door swing change</p>	<p>Extra shelf with clips          Door locks          6" legs (black or stainless steel mount units only)</p>
-----------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------



## GR Series - Reach In Hinged Glass Doors Refrigerators - Top Mount

### Technical Data

Model	Self contained	GR22	GR48	GR75	GR102
	Remote	R-GR22	R-GR48	R-GR75	R-GR102
Length		26-1/2"	52-1/4"	78"	103-3/4"
Height		83"	83"	83"	83"
Depth		33-7/8"	33-7/8"	33-7/8"	33-7/8"
Depth with drain (Dimensions are +/- 1/4")		36-1/2"	36-1/2"	36-1/2"	36-1/2"
Operating temperature	Self contained	38°F to 41°F	38°F to 41°F	38°F to 41°F	38°F to 41°F
Refrigerant		R134a	R134a	R134a	R134a
System type		Capillary tube	Capillary tube	Capillary tube	Expansion valve
Compressor size- HP	Self contained	1/3	1/3	1/2	3/4
Refrigeration system	Remote	Temp. control	Temp. control	Temp. control	Pressure control
BTU's at +20°F Evap. Temp.		1700	3100	4400	5900
Voltage		115V	115V	115V	115/208-230V
Amperage	Self contained	10.2A	11.0A	13.8A	6.4/7.1A
Amperage	Remote	2.6A	3.4A	4.1A	6.4A
Cord and plug		Yes(15A)	Yes(15A)	Yes(20A)	No
Exterior color		White	White	White	White
Interior color		White	White	White	White
Inside end panels		White	White	White	White
Floors		White	White	White	White
Drain Electric Condensate		Yes	Yes	Yes	Yes
Total shelves		4	8	12	16
Door size		23-3/4"X62-1/4"	23-3/4"X62-1/4"	23-3/4"X62-1/4"	23-3/4"X62-1/4"
Cubic capacity (ft <sup>3</sup> )		22	48	75	102


### SHIPPING INFORMATION

Height		82"	82"	82"	82"
Width		44"	44"	44"	44"
Depth		31"	58"	84"	109"
Gross weight	Self contained	330#	520#	720#	980#
	Remote	215#	405#	595#	830#
Cubic feet		77ft <sup>3</sup>	125ft <sup>3</sup>	182ft <sup>3</sup>	236ft <sup>3</sup>

- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity
- Specification subject to change without notice

## GR Series - Reach In Hinged Glass Doors Refrigerators - Top Mount

### Technical Data • Side View • Plan View

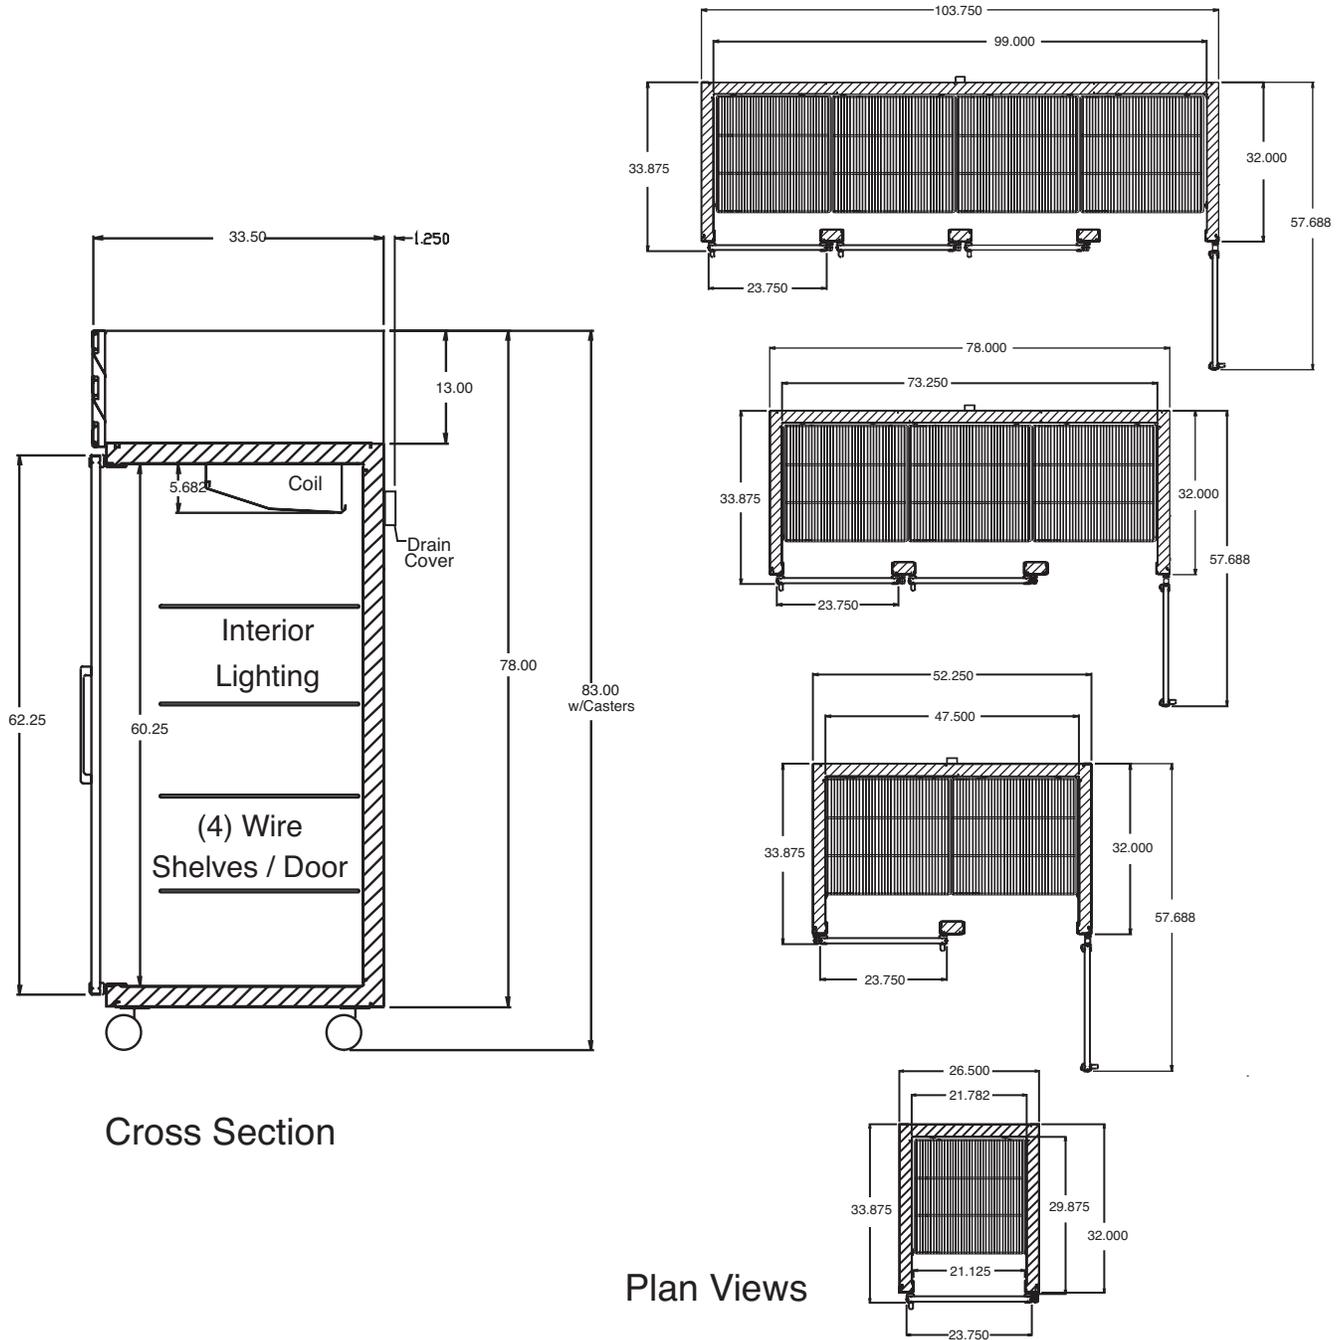

Cross Section

Plan Views