

35 Series - Low Profile 44"H Double Duty - Deli

• PRODUCT SPECIFICATIONS SHEETS



- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity

**Self Contained
Remote**

**SC-CDS35-4L
R-CDS35-4L**

**SC-CDS35-6L
R-CDS35-6L**

**SC-CDS35-8L
R-CDS35-8L**

Length

50"

71"

95"

Height

44"

44"

44"

Depth

35-1/2"

35-1/2"

35-1/2"

Depth with bottom door

38-1/2"

38-1/2"

38-1/2"

(Dimensions are +/-1/4")

- Specification subject to change without notice

35 Series – Low Profile 44"H Double Duty – Deli

Standard Specifications and Optional Features

<p>CONSTRUCTION UL Classified to ANSI/NSF 7 Foamed in place CFC free foam Triple pane insulated front glass-26"H Heavy gauge steel super structure Bottom storage Drain is included for cleaning</p>	<p>FINISHES Satin finish extrusion on doors and door tracks Designer white exterior front and ends Stainless steel mirror trim Stainless steel heavy gauge top - 17" W Designer white exterior rear</p>
<p>INTERIOR Designer white ends Stainless steel heavy gauge mezzanine shelf White aluminum floor (<i>bottom storage area</i>) Air insulated baffle (<i>prevents moisture from dripping into display area</i>) Epoxy coated main deck shelves</p>	<p>REFRIGERATION Copevap system (<i>eliminates need for condensate pan</i>) R134a expansion valve system Gravity coil located at <i>inside top of unit and bottom storage area</i> Self contained system Automatic defrost controlled by time clock-(<i>self contained units only</i>) Pressure control maintains constant temperatures Remotes available</p>
<p>EXTERIOR Double pane rear removable doors Newly designed rear compression door jamb Removable front grille allows for cleaning Removable rear grille for easy servicing</p>	<p>LIGHTING 2 Rows of T12 lighting at top of unit</p>
<p>ELECTRICAL REQUIREMENTS 115V/60Hz/1Ph Unit must be hard wired UL/CUL listed 115V-12AMP general purpose receptacle (<i>wired separately</i>)</p>	<p><i>Important Note: All refrigerated cases are designed to operate in an environment of 75 degrees and 55% relative humidity.</i></p> <p><i>Important Note: Product must be cooled before being displayed within the case.</i></p>

OPTIONAL FEATURES

<p>Scale stand Paper cutter Stainless steel, laminate, or paint Mirrored doors Extra row of mezzanine shelf</p>	<p>Front bumpers 1" or 3" Door locks Digital thermometer Pass thru front doors Sandwich racks</p>
---	---



35 Series – Low Profile 44"H Double Duty – Deli

Technical Data

Model #	Self contained	SC-CDS35-4L	SC-CDS35-6L	SC-CDS35-8L
	Remote	R-CDS35-4L	R-CDS35-6L	R-CDS35-8L
Length		50"	71"	95"
Height		44"	44"	44"
Depth		35-1/2"	35-1/2"	35-1/2"
Depth with Bottom door (Dimensions are +/- 1/4")		38-1/2"	38-1/2"	38-1/2"
Operating temperature		36°F to 40°F	36°F to 40°F	36°F to 40°F
Refrigerant (expansion valve)	Self contained	R134a	R134a	R134a
Compressor size HP	Self contained	1/4	1/3	1/3
Pressure control settings @ 75°F, 55%RH		CUT IN 30 CUT OUT 12	30 12	30 12
Defrost per day (24 hours)	Air Defrost	1 per day	1 per day	1 per day
BTU's at +20°F Evap. Temp.	Remote	1400	2100	2800
Voltage		115V	115V	115V
Amperage	Self contained	6.0A	8.7A	9.1A
Amperage, lights only	Remote	0.8A	1.3A	1.6A
Cord and plug		No	No	No
Exterior color		White	White	White
Interior color		White	White	White
Floors		White	White	White
# of top doors		2	2	4
Door size		19-3/16"X19-3/16"	29-5/8"X19-3/16"	19-3/16"X19-3/16"
# of bottom doors	Self contained	1	2	3
	Remote	2	3	4
Front glass		26" X 45"	26" X 66"	26" X 90"
# of coils		2	2	2
Bottom storage		Yes	Yes	Yes
Main deck shelf #		2	3	4
Main deck size		22-1/4"X31-5/8"	22-1/4"X31-5/8"	22-1/4"X31-5/8"
Cubic capacity (ft ³)		23	34	45
Mezzanine shelf		Standard	Standard	Standard


SHIPPING INFORMATION

Height		58"	58"	58"
Depth		44"	44"	44"
Length		61"	87"	109"
Gross weight	Self contained	480#	625#	880#
	Remote	434#	571#	826#
Cubic feet		89ft ³	128ft ³	164ft ³


- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity
- Cases are equipped with drains; check your local building codes for connection requirements.
- Specification subject to change without notice

35 Series – Low Profile 44"H Double Duty – Deli


Technical Data • Side View • Plan View

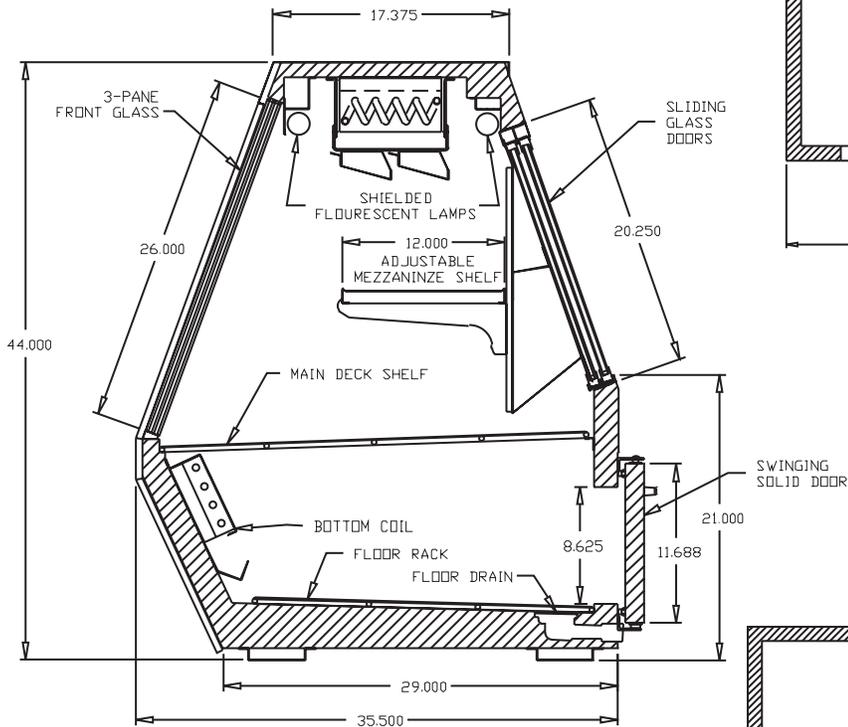

Cross Section




VIEW "A"

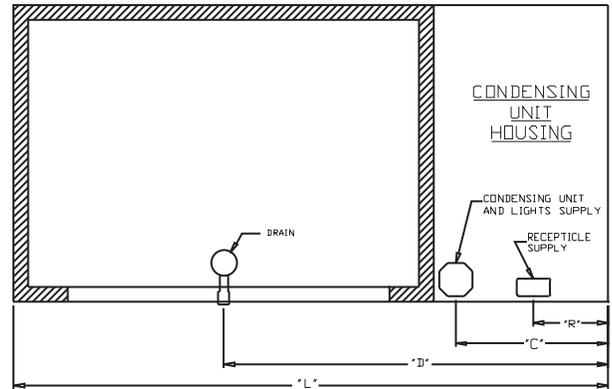

SIZE	"L"	"R"	"C"	"D"
4	50	25	25	33
6	71	9	18.250	45.875
8	95	9	18.250	57.875
10	119	9	18.250	69.875
12	143	9	18.250	81.875

Plan View Self-contained

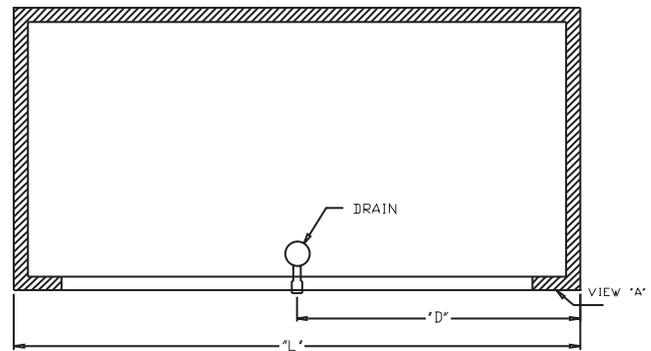

SIZE	"L"	"D"
4	50	25
6	71	35.500
8	95	47.500
10	119	59.500
12	143	61.500

Plan View Remote