

Model Number

IHRSP250	IHRSP275
IHRSP350	IHRSP375
IHRSP450	IHRSP475
IHRSP550	IHRSP575
IHRSP650	IHRSP675

Add suffix "T" for Electronic Thermostat

Add suffix "C" for Computer Controls



Filter is located under fryers to save valuable space.



Filter pan is designed for maximum oil return.



5.5 GPM, 1/3 HP roller pump speeds up filtering process.



IHRSP250

FILTER PACKAGE CHOICES - Up to six fryers can be battered into one fryer / filter system.

- Available for 50 and 75 lb. (27 and 41 Liters) oil capacity fryers.
- Available with Snap Action Thermostats, Electronic Thermostats or Computer Controls.

LOCATED UNDER FRYERS - Filter location under fryers saves valuable space.

- Internally plumbed oil drain and return line.

UNIQUE FILTER PAN DESIGN - Filter pan is designed for maximum oil return.

- Stainless steel construction is easy to clean and has a professional look.
- Positive-latching filter paper holder holds paper in place for optimal filtration.
- Quick disconnect connection offers quick and safe connection of the filtered oil back into the frypots.
- All oil drain and return lines are internally plumbed for convenience and safety.


ROLLER-PUMP - Up to six fryers can be battered into one fryer / filter system.

- 5.5 GPM pump with a 1/3 HP motor speeds up filtering process.
- Can pump oil into a disposal vat up to 20 feet away.

EXTERIOR FEATURES - Continuous cabinet provides a professional look.

- 7" (179 mm) deep continuous stainless steel front landing ledge protects manifold.
- Front 1-1/4" (32 mm) gas manifold is standard.
- Stainless steel precision welded frypot.
- Includes casters, joiner strips and filter starter kit.



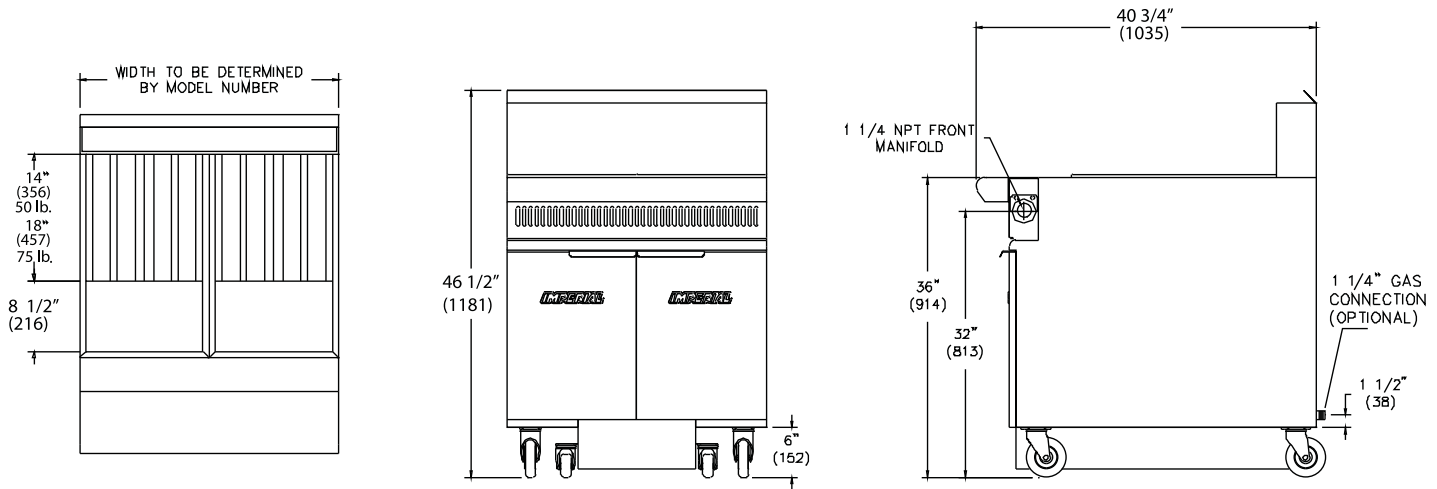

SPACE SAVER HEAVY DUTY FRYER/FILTER SYSTEMS

MODEL	FRYER OIL CAPACITY	FRYER DEPTH	NUMBER OF FRYERS	SHIP WEIGHT (KG)	LBS
IHRSP250	50 lbs. (41 L)	40-3/4" (1035 mm)	2	(282)	622
IHRSP350	50 lbs. (41 L)	40-3/4" (1035 mm)	3	(412)	908
IHRSP450	50 lbs. (41 L)	40-3/4" (1035 mm)	4	(542)	1194
IHRSP550	50 lbs. (41 L)	40-3/4" (1035 mm)	5	(671)	1480
IHRSP650	50 lbs. (41 L)	40-3/4" (1035 mm)	6	(801)	1766
IHRSP275	75 lbs. (51 L)	40-3/4" (1035 mm)	2	(293)	646
IHRSP375	75 lbs. (51 L)	40-3/4" (1035 mm)	3	(428)	944
IHRSP475	75 lbs. (51 L)	40-3/4" (1035 mm)	4	(563)	1242
IHRSP575	75 lbs. (51 L)	40-3/4" (1035 mm)	5	(699)	1540
IHRSP675	75 lbs. (51 L)	40-3/4" (1035 mm)	6	(834)	1838

Measurements in () are metric equivalents.

MODEL	DIMENSIONS	CRATED DIMENSIONS
IHRSP250	31" w x 40-3/4" d x 46-1/2" h (787 x 1035 x 1181 mm)	32-1/2" w x 43" d x 49-1/2" h (826 x 1092 x 1257 mm)
IHRSP350	46-1/2" w x 40-3/4" d x 46-1/2" h (1181 x 1035 x 1181 mm)	48" w x 43" d x 49-1/2" h (1219 x 1092 x 1257 mm)
IHRSP450	62" w x 40-3/4" d x 46-1/2" h (1575 x 1035 x 1181 mm)	63-1/2" w x 43" d x 49-1/2" h (1613 x 1092 x 1257 mm)
IHRSP550	77-1/2" w x 40-3/4" d x 46-1/2" h (1969 x 1035 x 1181 mm)	79" w x 43" d x 49-1/2" h (2007 x 1092 x 1257 mm)
IHRSP650	93" w x 40-3/4" d x 46-1/2" h (2362 x 1035 x 1181 mm)	94-1/2" w x 43" d x 49-1/2" h (2400 x 1092 x 1257 mm)
IHRSP275	39" w x 40-3/4" d x 46-1/2" h (911 x 1035 x 1181 mm)	40-1/2" w x 43" d x 49-1/2" h (1029 x 1092 x 1257 mm)
IHRSP375	58-1/2" w x 40-3/4" d x 46-1/2" h (1486 x 1035 x 1181 mm)	60" w x 43" d x 49-1/2" h (1524 x 1092 x 1257 mm)
IHRSP475	78" w x 40-3/4" d x 46-1/2" h (1981 x 1035 x 1181 mm)	79-1/2" w x 43" d x 49-1/2" h (2019 x 1092 x 1257 mm)
IHRSP575	97-1/2" w x 40-3/4" d x 46-1/2" h (2477 x 1035 x 1181 mm)	99" w x 43" d x 49-1/2" h (2515 x 1092 x 1257 mm)
IHRSP675	117" w x 40-3/4" d x 46-1/2" h (2972 x 1035 x 1181 mm)	118-1/2" w x 43" d x 49-1/2" h (3010 x 1092 x 1257 mm)

FILTER ELECTRICAL REQUIREMENT

VOLTS	PHASE	HERTZ	AMPS
115 V	1	60	6.8 amps

6ft. (1829 mm) power cord with 3 prong plug provided

CLEARANCE REQUIREMENTS

For use only on non-combustible floors. Legs or casters are required for non-combustible floors. Provide 0" clearance from non-combustible surfaces and 6" (152 mm) from combustible surfaces.

OPTIONS AND ACCESSORIES

- Automatic basket lifts with computerized controls
- Manual controlled basket lifts
- Gas shut-off valve, 1-1/4" N.P.T.
- Gas regulator, 1-1/4" N.P.T.
- Rear gas connection, 1-1/4" N.P.T.
- Stainless steel tank cover
- Stainless steel side drain shelf
- Stainless steel side splash
- Manual timer
- Filter paper 40# thickness, 20 microns, 100 sheets per box

