

Model Numbers

IR-12-SPR    IR-18-SPR  
IR-24-SPR    IR-36-SPR



Spreader top provides extra working space



Optional electric Bain-Marie shown with optional faucet



Optional cut-outs are also available



IR-12-SPR shown with optional door


**SPREADER** - Provides additional working space between ranges.

- Cabinet base has a bottom shelf for storing pans and stock pots.
- Permits rear tee connection to add sufficient gas input for a large battery of gas equipment.
- Optional electric Bain-Marie and optional faucet for added convenience for 18", 24" and 36" (457, 610, 914 mm) models.
- Optional cut-outs in work top are available to hold round inserts.

**EXTERIOR FEATURES** - Stainless steel front, sides, landing ledge and open cabinet base.

- Welded and polished stainless steel seams.
- Large 5" (127 mm) stainless steel landing ledge.
- 6" (152 mm) high 2-1/2" (64 mm) diameter heavy duty legs with adjustable feet.
- One year parts and labor warranty.



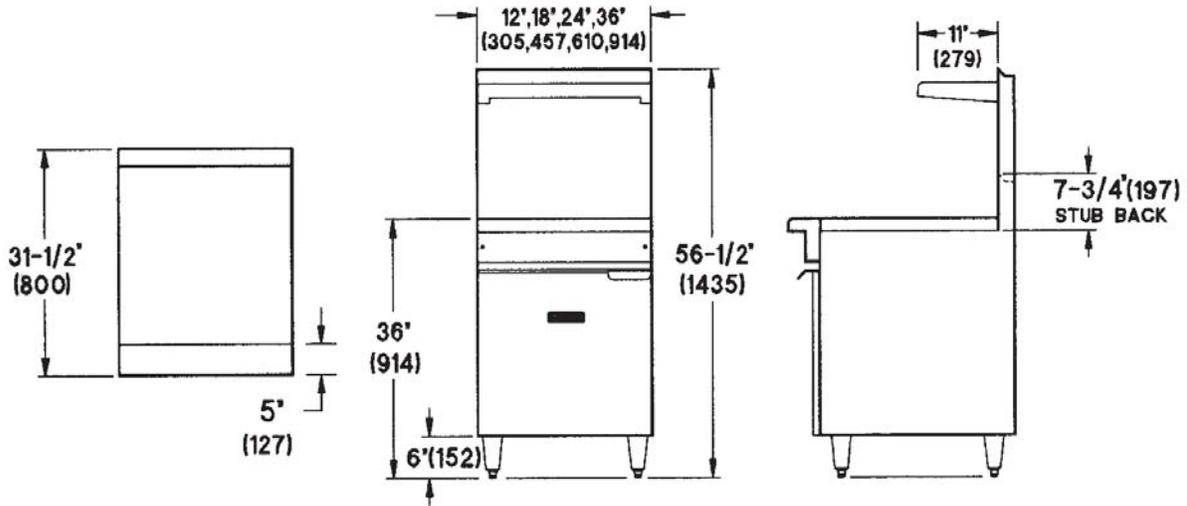

## RANGE MATCH SPREADERS

TOP	MODEL	WIDTH		BASE	SHIP WEIGHT	
12" (305 MM) SPREADER		INCHES	(MM)	DESCRIPTION	(KG)	LBS
	IR-12-SPR	12"	(305)	Open cabinet with bottom shelf	(68)	150
<b>18" (457 MM) SPREADER</b>						
	IR-18-SPR	18"	(457)	Open cabinet with bottom shelf	(72)	160
<b>24" (610 MM) SPREADER</b>						
	IR-24-SPR	24"	(610)	Open cabinet with bottom shelf	(88)	195
<b>36" (914 MM) SPREADER</b>						
	IR-36-SPR	36"	(914)	Open cabinet with bottom shelf	(95)	210

Measurements in ( ) are metric equivalents.

MODEL	DIMENSIONS	CRATED DIMENSIONS
IR-12-SPR	12" w x 31-1/2" d x 56-1/2" h (305 x 794 x 1435 mm)	14" w x 39" d x 35" h (660 x 991 x 889 mm)
IR-18-SPR	18" w x 31-1/2" d x 56-1/2" h (305 x 794 x 1435 mm)	20" w x 39" d x 35" h (508 x 991 x 889 mm)
IR-24-SPR	24" w x 31-1/2" d x 56-1/2" h (305 x 794 x 1435 mm)	26" w x 39" d x 35" h (660 x 991 x 889 mm)
IR-36-SPR	36" w x 31-1/2" d x 56-1/2" h (305 x 794 x 1435 mm)	38" w x 39" d x 35" h (965 x 991 x 889 mm)

### OPTIONS AND ACCESSORIES

- Electric bain-marie and faucet for 18", 24" and 36" (457, 610 and 914 mm) models
- Cut-outs in work top for round inserts
- Salamander or Cheesemelter Infra-red Broilers for 24" and 36" (610 and 914 mm) models
- Reinforcement channels for mounting cheesemelter/salamander
- Stainless steel interior on open cabinet base
- Stainless steel single door on 12", 18" and 24" (305, 457 and 610 mm) open cabinet base
- Stainless steel double door on 36" (914 mm) open cabinet base
- Stainless steel center shelf in open cabinet base
- 6" (152 mm) casters

