

SERIES G 15" ROTOR COMMERCIAL FOOD WASTE DISPOSER



DESIGN

The "G" Series is recommended for handling huge quantities of the heaviest and toughest material encountered in central food waste areas. The extra-large 15" rotor with the 7 1/2 HP motor generates maximum centrifugal force and impact disintegration speed. The Series "G" easily disposes all general heavy/waste including big steer rib, leg or knuckle bones (even raw), lobster shells, poultry carcasses, fish heads, pineapples and regular or wax-coated paper waste.

STANDARD EQUIPMENT

- 7 1/2 HP motor


OPTIONAL EQUIPMENT

- Stainless steel cone or sink attachment (includes vinyl silver trap ring, solenoid valve, flow control valve, vacuum breaker)
- 10 HP motor- heavier duty
- Offset-body for maximum space utilization, also available for both cone & sink attachments
- Cones 12", 15" & 18"

NOTE: Sink attachments and s/s cones need to be welded into table



O style- Optional off-set body
for use with bowl/cone trough

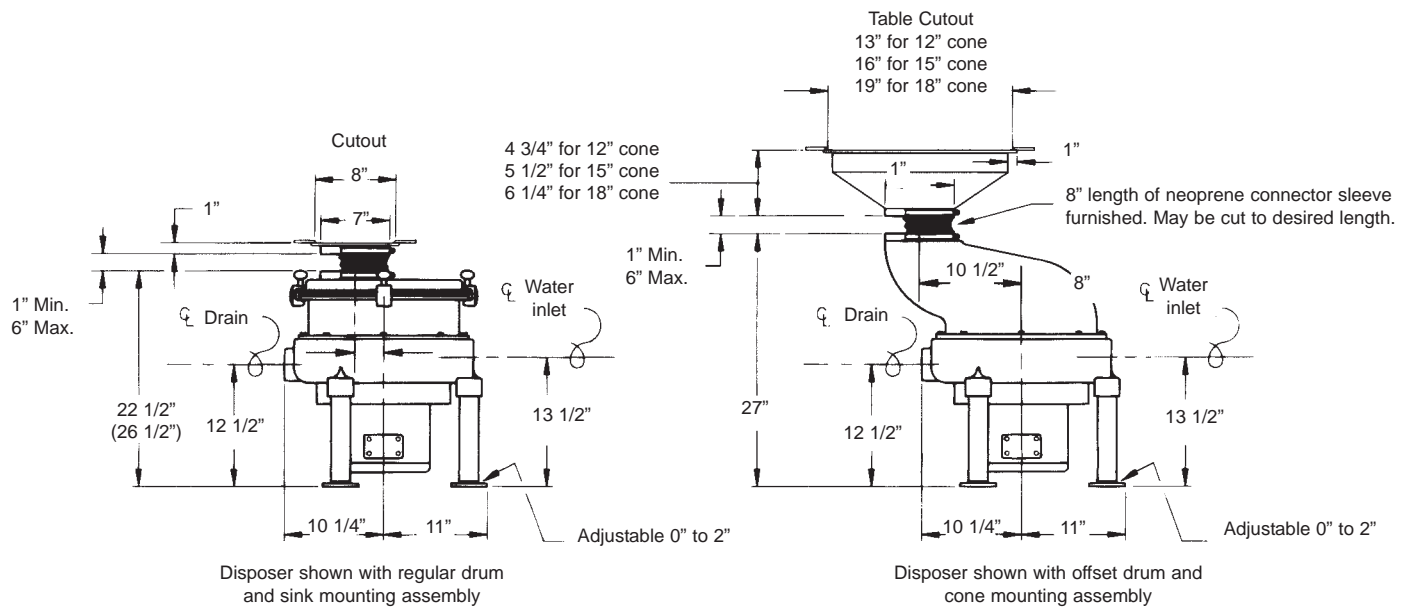

Note: For all rough in connections see installation and layout detail drawing

DESIGN AND CONSTRUCTION

- Waste chamber design permits dual directional operation when used with reversing control or switch, doubling the life cycle of the shattering mechanism.
- Basic body components are cast gray iron, machined, primed and painted. 15" diameter rotor with (2) bolt-on reversible impact bars and sizing ring are cast ductile iron, machined, balanced and heat treated.
- Access to waste chamber by means of a cast aluminum lid having a 7" diameter throat opening, removable by means of quick-release head clamps.
- Flexible drain connector. Fastens quickly to either metal or PVC drain line (3" pipe size).
- Stainless steel legs and feet, adjustable from 0" to 2".
- Disposer connects to cone or sink assembly by means of a neoprene isolation sleeve and (2) stainless steel clamps.
- Offset Design: For maximum space utilization, disposer is also available with an 10 1/2" off-set waste chamber for both cone and sink attachments.

MOTOR

- Reversing, continuous duty, 1725 RPM (1425 RPM, 50 Hz), full rated horsepower, double sealed, permanently lubricated ball bearings.
- Thermal overload protection (heaters) in control; must be sized as required.
- Available in 7 1/2 and 10 HP, 3 Phase.
- Dual voltage winding: 208-230/460 Volts, 60 Hz
190/380 Volts, 50 Hz

(See table for ampere draw per horsepower, volts & phase)

CONTROLS

Electrical switches or control centers not included, must be selected as required.

Note: All plumbing and electrical connections should be made according to local codes.

HP	THREE PHASE	
	Volts	Amps*
7 1/2	208	23.0
	230	22.0
	460	6.8
10	208	33.0
	230	30.0
	460	15.0

*Ratings are for 60 Hz operation.