



Item # _____

Job _____

HD SUPER™ DUNNAGE RACKS

- **Holds More than a Ton:** Stores goods safely up off the floor. The 48" (1220mm) length rack has a 3,000 lb. (1360kg) uniformly distributed static load capacity; the 60" (1525mm) length rack holds up to 2,400 lbs. (1087kg).
- **Withstands Impact:** The extra capacity of the HD Super™ dunnage rack translates into an increased ability to stand up under the strain of unbalanced loads and the repeated impact of materials being placed on it.
- **HD Super™ Design:** Provides fast, secure assembly without the use of any special tools. 1⁵/₈" (41mm) posts provide greater rigidity.
- **Efficient Storage:** The low profile of Metro dunnage racks makes it easy to store large, bulky items without taking up valuable shelf space.
- **Removable Wire Deck:** Fits top support frame. Lifts off for thorough cleaning. Offset wire design raises deck above post caps, helps prevent items from snagging or tearing.
- **Convenient:** Lower support frame is open in front – no need to move the rack to clean beneath it. Open wire grid minimizes dust and moisture accumulation on deck.
- **Available Options:** Chrome-plated, Metroseal 3™ or stainless steel.
- **Leveling Feet:** Compensate for surface irregularities.



Dunnage Racks HDP Series



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com



10.68


Job _____



HD SUPER™ DUNNAGE RACKS

Specifications

- **Construction:** Top and lower support frames are made of 1½" (38mm) square tubing. Removable deck consists of 5/16" (8mm) diameter wire.

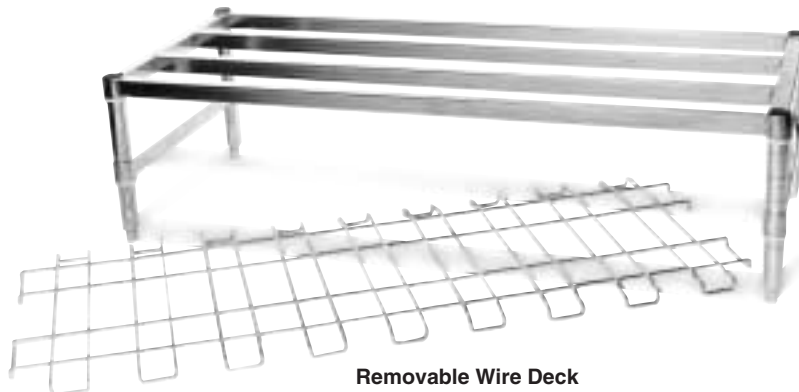

Removable Wire Deck

Dimensions

| Cat. No. Chrome | Cat. No. Metroseal 3™ | Cat. No. Stainless | Width | | Length | | Height | | Approx. Pkd. Wt. | |
|--------------------|--------------------------|-----------------------|-------|------|--------|------|--------|------|---------------------|------|
| | | | (in.) | (mm) | (in.) | (mm) | (in.) | (mm) | (lbs.) | (kg) |
| HDP35C | HDP35K3 | HDP35S | 18 | 455 | 48 | 1220 | 16¼ | 413 | 52 | 24 |
| HDP36C | HDP36K3 | HDP36S | 18 | 455 | 60 | 1525 | 16¼ | 413 | 62 | 28 |
| HDP55C | HDP55K3 | HDP55S | 24 | 610 | 48 | 1220 | 16¼ | 413 | 57 | 26 |
| HDP56C | HDP56K3 | HDP56S | 24 | 610 | 60 | 1525 | 16¼ | 413 | 66 | 30 |

Maximum capacity 2,400 lbs. (1087kg) uniformly distributed static load on the 60" (1524mm) length racks; 3,000 lbs. (1360kg) on the 48" (1220mm) length racks.

Note: Capacity will be reduced and the unit will become less stable if the 3-sided frame is mounted higher than 6" (152mm) from the floor.

Note: For more information on Metroseal 3, refer to sheet #10.10a.

All Metro Catalog Sheets are available on our Web Site: www.metro.com



InterMetro Industries Corporation

North Washington Street, Wilkes-Barre, PA 18705
Phone: 570-825-2741 • Fax: 570-825-2852

For Product Information Call: 1-800-433-2232

L02-032
Printed in U.S.A. Rev. 2/03

Information and specifications are subject to change without notice. Please confirm at time of order.

Copyright © 2003 InterMetro Industries Corp.