

48" RESTAURANT RANGE



DESCRIPTION:

To be model #JSR _____ manufactured by Jade. Open top sections are to have cast iron 27,500 BTU burners with 12" x 24" cast iron grate over two burners. Griddles are to have polished 1" steel plate with 24,000 BTU burner every 12". Unit to be provided with 3/4" gas regulator.

SPECIFY BASE:

STANDARD OVEN

To have conventional oven base with stainless steel lining. Oven sides and bottom to be removable without tools. Provide with one oven rack, with wires curled around main frame and chrome plated. Thermostat to adjust from 150°F to 500°F to have 35,000 BTU/hr burner. Oven interior 28" W x 14" H x 24" D.

CONVECTION OVEN

To have convection oven base with 14 gauge stainless steel interior. Provide with one oven rack, with wires curled around main frame and chrome plated. Thermostat to adjust from 150°F to 500°F to have 30,000 BTU/hr burner. Provide with 1/4 HP 115/60/1 blower motor. Oven interior 27-3/4" W x 13-1/2" H x 20-1/2" D.







CABINET BASE

To have open cabinet base constructed of 14 gauge all welded steel.

SPECIFY TYPE OF GAS WHEN ORDERING.

SPECIFY ALTITUDE WHEN ABOVE 2,000 FT.

MODEL NO. DESCRIPTION

<input type="checkbox"/> JSR-8-36	8 OPEN BURNERS W/ OVEN	
<input type="checkbox"/> JSR-8-36C	8 OPEN BURNERS W/ CONVECTION OVEN	
<input type="checkbox"/> JSR-8	8 OPEN BURNERS W/ CABINET BASE	
<input type="checkbox"/> JSR-24G-4-36	24" GRIDDLE, 4 OPEN BURNERS W/ OVEN	
<input type="checkbox"/> JSR-24G-4-36C	24" GRIDDLE, 4 OPEN BURNERS W/ CONVECTION OVEN	
<input type="checkbox"/> JSR-24G-4	24" GRIDDLE, 4 OPEN BURNER W/ CABINET BASE	
<input type="checkbox"/> JSR-36G-2-36	36" GRIDDLE, 2 OPEN BURNERS W/ OVEN	
<input type="checkbox"/> JSR-36G-2-36C	36" GRIDDLE, 2 OPEN BURNERS W/ CONVECTION OVEN	
<input type="checkbox"/> JSR-36G-2	36" GRIDDLE, 2 OPEN BURNER W/ CABINET BASE	
<input type="checkbox"/> JSR-4-24G-36	4 OPEN BURNERS, 24" GRIDDLE W/ OVEN	
<input type="checkbox"/> JSR-4-24G-36C	4 OPEN BURNERS, 24" GRIDDLE W/ CONVECTION OVEN	
<input type="checkbox"/> JSR-4-24G	4 OPEN BURNERS, 24" GRIDDLE W/ CABINET BASE	
<input type="checkbox"/> JSR-2-36G-36	2 OPEN BURNERS, 36" GRIDDLE W/ OVEN	
<input type="checkbox"/> JSR-2-36G-36C	2 OPEN BURNERS, 36" GRIDDLE W/ CONVECTION OVEN	
<input type="checkbox"/> JSR-2-36G	2 OPEN BURNERS, 36" GRIDDLE W/CABINET BASE	
<input type="checkbox"/> JSR-48G-36	48" GRIDDLE W/ OVEN	
<input type="checkbox"/> JSR-48G-36C	48" GRIDDLE W/ CONVECTION OVEN	
<input type="checkbox"/> JSR-48G	48" GRIDDLE W/ CABINET BASE	

Note: For hot top section in lieu of 2 open burners, add 1HT and delete 2 open burners from model number. For example: JSR-1HT-6-36 (1 hot top, 6 open burners with oven base).

STANDARD FEATURES

- Stainless steel front, sides, tray bed and high shelf
- 14 gauge stainless steel all welded construction
- Stainless steel removable oven interior
- One chrome plated oven rack per oven (wires curled and welded around main frame with no sharp ends)
- Oven control located in cool zone
- Stainless steel gas tubing throughout
- Stainless steel pilot tips
- 3/4" gas regulator
- Stainless steel single deck high shelf
- Grooved griddle surface (add G to Model #)
- Casters

GRIDDLE

- 1" thick highly polished steel plate
- One 24,000 BTU burner ever 12"

OPEN BURNERS

- 27,500 BTU easy clean cast iron open burner
- 12" x 24" lift-off cast iron top grates

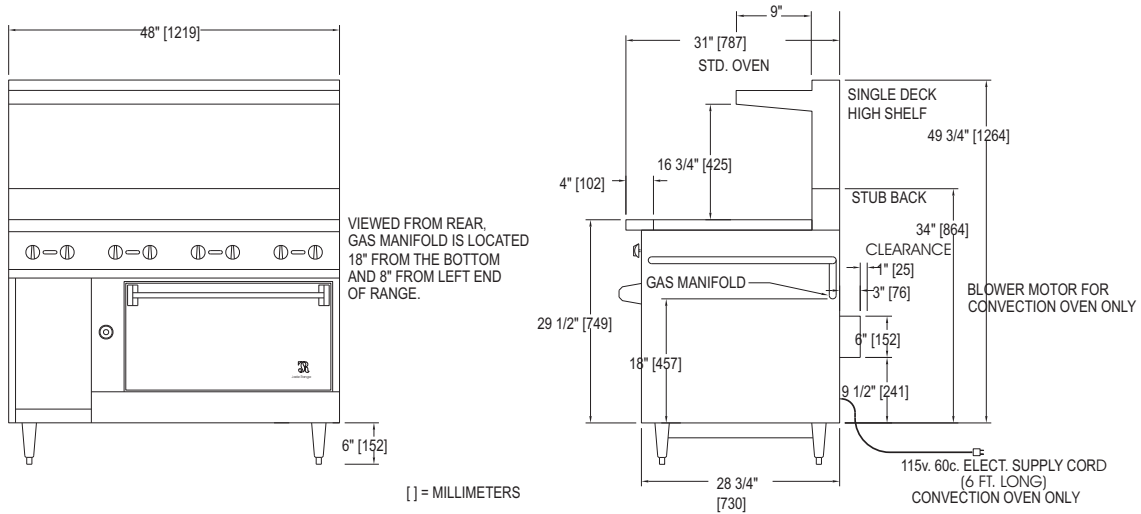
AVAILABLE OPTIONS

- Stainless steel stub back
- Stainless steel high riser
- Thermostatic griddle control (add T to Model #)





48" RESTAURANT RANGE



MODEL	BTUS	WIDTH	DEPTH	HEIGHT	APPX. SHP. WT.
JSR-8-36	250,000	48"	31"	SEE DRAWING	630 LBS.
JSR-8-36C	250,000	48"	34"	SEE DRAWING	655 LBS.
JSR-8	220,000	48"	31"	SEE DRAWING	445 LBS.
JSR-24G-4-36	188,000	48"	31"	SEE DRAWING	650 LBS.
JSR-24G-4-36C	188,000	48"	34"	SEE DRAWING	675 LBS.
JSR-24G-4	158,000	48"	31"	SEE DRAWING	465 LBS.
JSR-36G-2-36	157,000	48"	31"	SEE DRAWING	720 LBS.
JSR-36G-2-36C	157,000	48"	34"	SEE DRAWING	745 LBS.
JSR-36G-2	127,000	48"	31"	SEE DRAWING	535 LBS.
JSR-4-24G-36	188,000	48"	31"	SEE DRAWING	650 LBS.
JSR-4-24G-36C	188,000	48"	34"	SEE DRAWING	675 LBS.
JSR-4-24G	158,000	48"	31"	SEE DRAWING	465 LBS.
JSR-2-36G-36	157,000	48"	31"	SEE DRAWING	720 LBS.
JSR-2-36G-36C	157,000	48"	34"	SEE DRAWING	745 LBS.
JSR-2-36G	127,000	48"	31"	SEE DRAWING	535 LBS.
JSR-48G-36	126,000	48"	31"	SEE DRAWING	770 LBS.
JSR-48G-36C	126,000	48"	34"	SEE DRAWING	795 LBS.
JSR-48G	96,000	48"	31"	SEE DRAWING	585 LBS.

ELECTRIC CONVECTION OVEN ONLY:

- Power Supply: 115/60/1 - 6 foot cord with 3 prong plug
- Total maximum amps 4.0/oven
- Electronic Spark Ignitor: activated by power switch, ignites standing pilot
- Fan Switch: three positions, on for normal operation, on for quick cool down, off.

UTILITY INFORMATION:

- 3/4" Connection - see drawing for location
- Required operating pressure:
Natural Gas 5" W.C. minimum
Propane Gas 10" W.C. minimum
14" W.C. maximum

NOTE: SPECIFY TYPE OF GAS WHEN ORDERING.

Note: This unit must be connected with the gas appliance regulator supplied.



WWW.JADERANGE.COM

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 FAX: 714-961-2550
 Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. PRINTED IN USA