



CABINET BASE GRIDDLE TOP RANGE

TITAN CABINET BASE GRIDDLE TOP RANGE



JTRH-36G



JTRH-36GG
with stainless steel riser

MODEL NO.	DESCRIPTION
<input type="checkbox"/> JTRH-12GT	12" GRIDDLE TOP SECTION THERMOSTAT CONTROL
<input type="checkbox"/> JTRH-12G	12" GRIDDLE TOP SECTION MANUAL CONTROL
<input type="checkbox"/> JTRH-18GT	18" GRIDDLE TOP SECTION THERMOSTAT CONTROL
<input type="checkbox"/> JTRH-18G	18" GRIDDLE TOP SECTION MANUAL CONTROL
<input type="checkbox"/> JTRH-24GT	24" GRIDDLE TOP SECTION THERMOSTAT CONTROL
<input type="checkbox"/> JTRH-24G	24" GRIDDLE TOP SECTION MANUAL CONTROL
<input type="checkbox"/> JTRH-36GT	36" GRIDDLE TOP SECTION THERMOSTAT CONTROL
<input type="checkbox"/> JTRH-36G	36" GRIDDLE TOP SECTION MANUAL CONTROL
<input type="checkbox"/> JTRH-48GT	48" GRIDDLE TOP SECTION THERMOSTAT CONTROL
<input type="checkbox"/> JTRH-48G	48" GRIDDLE TOP SECTION MANUAL CONTROL
<input type="checkbox"/> JTRH-60GT	60" GRIDDLE TOP SECTION THERMOSTAT CONTROL
<input type="checkbox"/> JTRH-60G	60" GRIDDLE TOP SECTION MANUAL CONTROL
<input type="checkbox"/> JTRH-72GT	72" GRIDDLE TOP SECTION THERMOSTAT CONTROL
<input type="checkbox"/> JTRH-72G	72" GRIDDLE TOP SECTION MANUAL CONTROL

STANDARD FEATURES

- Polished 1" thick steel griddle plates
- Variable size multi-point gas connection—see utility information for details
- 14 gauge stainless steel grease trough
- 14 gauge stainless side and rear splash
- Stainless steel cabinet interior and exterior
- Stainless steel front, sides, stub back, and bottom
- Stainless steel 6" plate shelf
- Stainless steel adjustable 6" legs
- 3/4" gas regulator (shipped loose, must be installed for proper operation)

AVAILABLE OPTIONS

- Stainless steel high riser
- Stainless steel double high riser
- Stainless steel high shelf
- Stainless steel double high shelf
- Stainless steel tubular high shelf
- Stainless steel tubular double high shelf
- Common plate shelf with Item(s) Model(s) _____
- Cap and cover manifold. Left Right

ACCESSORIES

- 6" casters, front two locking (5" diameter wheel)
- 36" flex hose with quick disconnect (3/4" connection)
- 48" flex hose with quick disconnect (3/4" connection)
- 1" gas pressure regulator (specify gas type)
- 1-1/4" gas pressure regulator (specify gas type)
- Grooved griddle surface (add "G" to model number)
- Stainless steel doors




WWW.JADERANGE.COM

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 FAX: 714-961-2550
Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. PRINTED IN USA





CABINET BASE GRIDDLE TOP RANGE

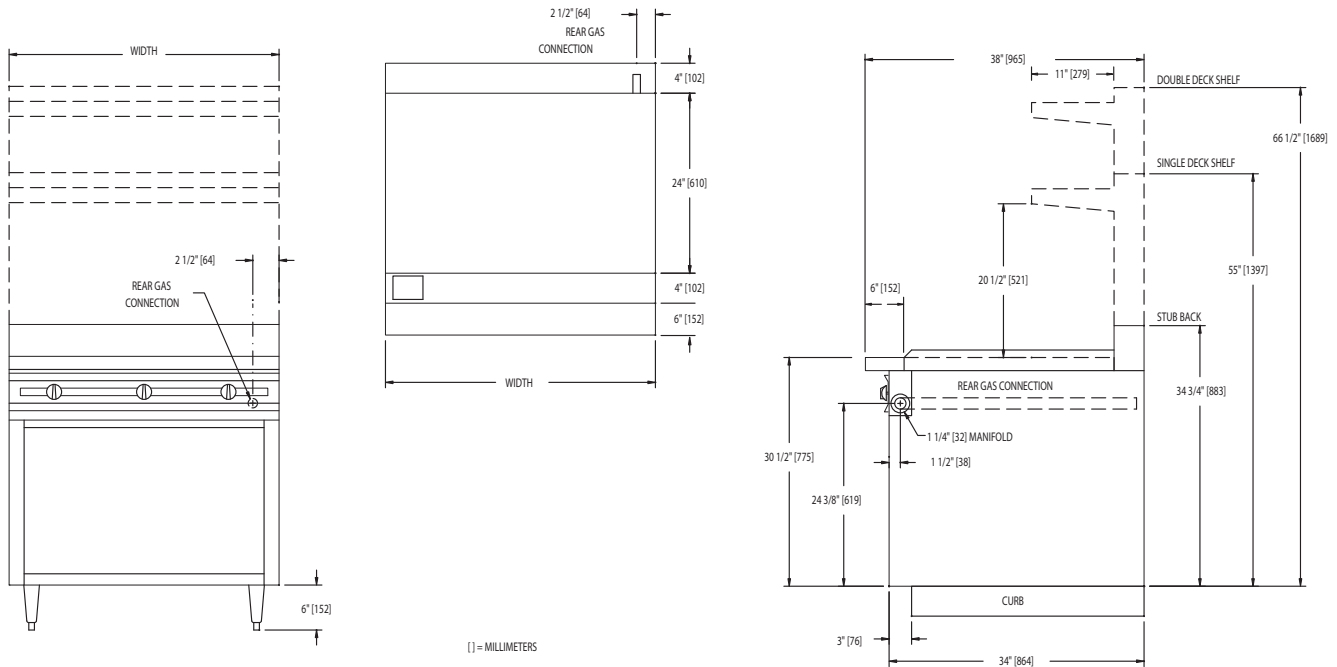

MODEL	BTUS	WIDTH	DEPTH	HEIGHT	APPX. SHP. WT.
JTRH-12G(T)	35,000 (30,000)	12"	38"	SEE DRAWING	175 LBS.
JTRH-18G(T)	35,000 (30,000)	18"	38"	SEE DRAWING	250 LBS.
JTRH-24G(T)	70,000 (60,000)	24"	38"	SEE DRAWING	300 LBS.
JTRH-36G(T)	70,000 (90,000)	36"	38"	SEE DRAWING	530 LBS.
JTRH-48G(T)	105,000 (120,000)	48"	38"	SEE DRAWING	705 LBS.
JTRH-60G(T)	140,000 (150,000)	60"	38"	SEE DRAWING	830 LBS.
JTRH-72G(T)	175,000 (180,000)	72"	38"	SEE DRAWING	1060 LBS.

DESCRIPTION:

Heavy duty cabinet base griddle top range. To be model # JTRH _____ manufactured by Jade Range. Top sections to consist of polished 1" reinforced griddle plate with 2-1/2" high stainless steel splash guard. Provide with 35,000 BTU/hr. (30,000 BTU/hr.) per burner section, controlled by infinite gas valves. To have 14 gauge all welded body with stainless steel front, sides, back and bottom. All gas tubing to be stainless steel throughout. To have 6" stainless steel adjustable legs.

SPECIFY TYPE OF GAS WHEN ORDERING.

SPECIFY ALTITUDE WHEN ABOVE 2,000 ft.

UTILITY INFORMATION (GAS):

- Ranges are supplied with 1-1/4" front manifold connection and a 1" or 3/4" capped rear manifold connection. For rear manifold connection, remove cap. Ranges are supplied with 3/4" gas pressure regulator. For 1-1/4" or 1" gas pressure regulator, see accessories. (Specify required front manifold cap and cover when ordering.)
- Required operating pressure:
 - Natural Gas 5" W.C. minimum
 - Propane Gas 10" W.C. minimum
 - 14" W.C. maximum

Note: This unit must be connected with the gas appliance regulator supplied.



WWW.JADERANGE.COM

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 FAX: 714-961-2550
 Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. PRINTED IN USA